


NOTE:

WHERE IT HAS BEEN DETERMINED BY THE PUBLIC WORKS DIRECTOR, A REDUCED PRESSURE BACKFLOW ASSEMBLY WILL BE REQUIRED USING THIS STANDARD FOR INSTALLATION.

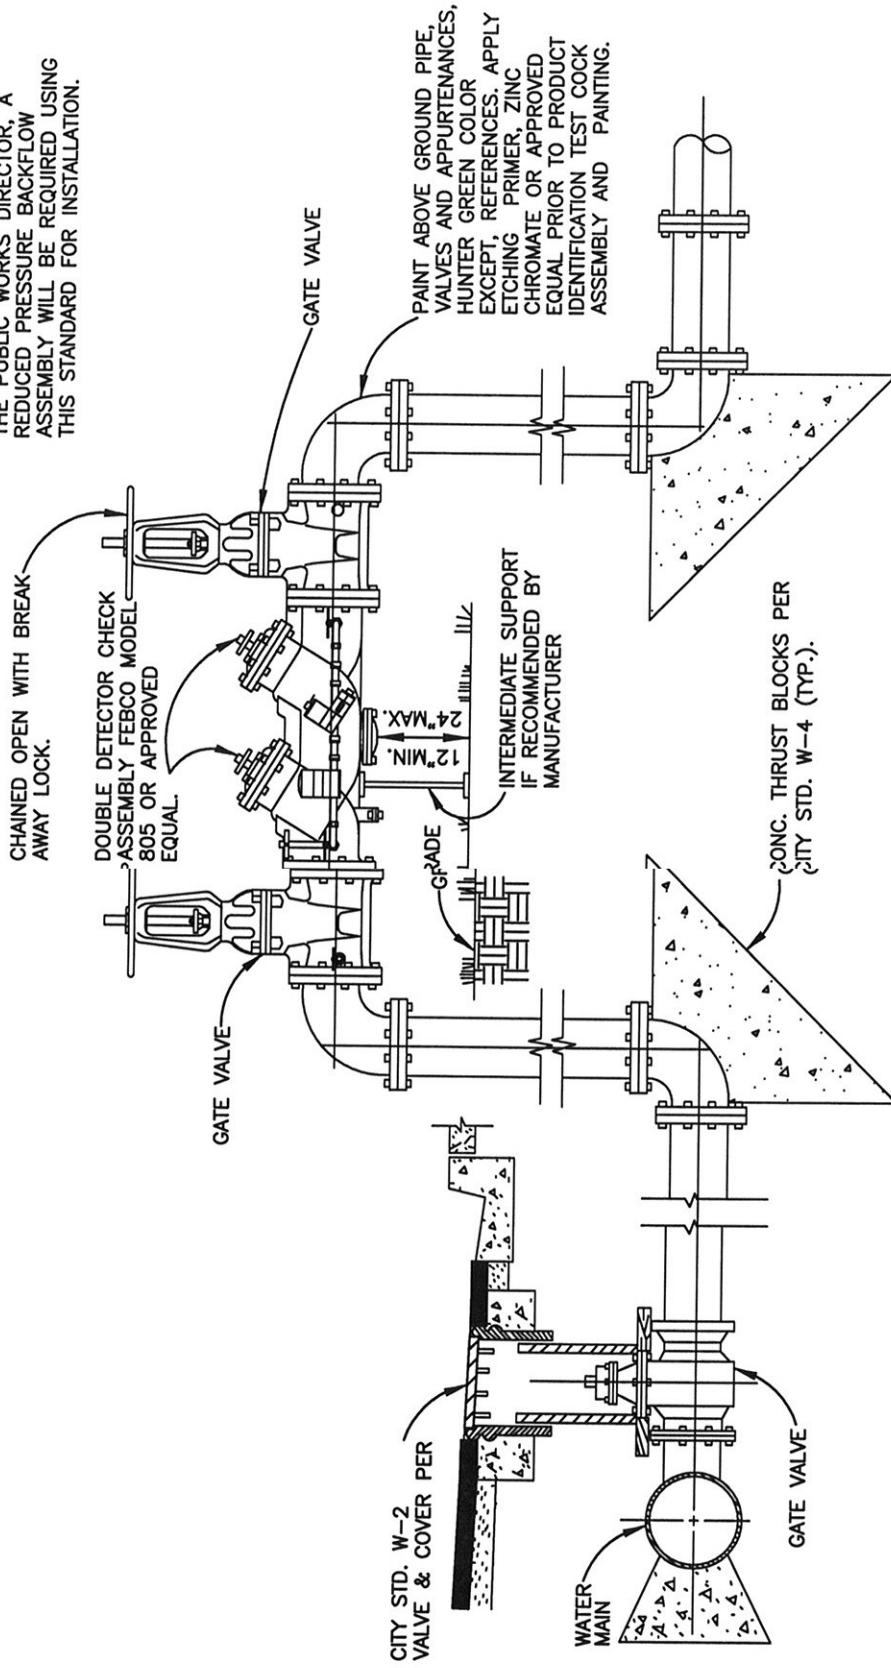

SECTION VIEW
NO SCALE

NOTE:

UNDERGROUND PIPING FOR FIRE LINES SHALL BE TESTED HYDRAULICALLY AT 200 PSI FOR 2 HOURS AS PER NFPA 13 UNDERGROUND PIPE SHALL NOT BE BURIED BUT MAY BE CENTER LOAD BURIED DURING 200PSI TEST. PIPE STAMP WORDING SHALL BE FACING UPWARD, FIRE DEPT. TO WITNESS TEST.

CITY of CORCORAN • Department of Public Works

Standard Drawing for:

FIRE SERVICE

APPROVED: City Engineer

05/19/08
Date

Revised:

W-7