

TOWN OF GROTON STORMWATER MANAGEMENT PLAN

APRIL 2017

AS REQUIRED BY THE CONNECTICUT DEPARTMENT OF ENERGY & ENVIRONMENTAL PROTECTION GENERAL PERMIT FOR THE DISCHARGE OF STORMWATER FROM SMALL MUNICIPAL SEPARTATE STORM SEWER SYSTEMS ISSUED JANUARY 20, 2016

TABLE OF CONTENTS

Executive Summary & Implementation Schedule

Section 1 – Contr	ol Measure 1	: Public Education and Outreach	
BMP #1-1:	Implement pu	ublic education program	Page 1-1
BMP #1-2:	Address educ	cation/outreach for pollutants of concern	Page 1-1
BMP #1-3:	Stormwater in	nformation provided on local cable access	Page 1-2
BMP #1-4:	Stormwater in	nformation provided on the Town's website	Page 1-2
BMP #1-5:	Educate dog	owners about picking up pet waste	Page 1-2
BMP #1-6:	Install and ma	aintain no dumping signs at coastal access areas	sPage 1-3
Section 2 – Contr	ol Measure 2	: Public Participation and Involvement	
BMP #2-1:		public notice requirements for the SWMP and rts	Page 2-1
BMP #2-2:		Committee meetings	•
BMP #2-3:		munity participation event	_
Section 3 – Contr	ol Measure 3	: Illicit Discharge Detection and Eliminatio	on
BMP #3-1:	-	itten Illicit Discharge Detection and Elimination	Page 3-1
BMP #3-2:		and maps of all MS4 stormwater outfalls in dispriority areas	Page 3-1
BMP #3-3:	Develop a pro	ogram for citizen reporting of illicit discharges	Page 3-2
BMP #3-4:	Establish lega	al authority to prohibit illicit discharges	Page 3-2
BMP #3-5:	Develop reco	rd keeping system for IDDE tracking	Page 3-2
BMP #3-6:	Address IDDI	E in areas with pollutants of concern	Page 3-3
Section 4 – Contr	ol Measure 4	Construction Site Runoff Control	
BMP #4-1:		nd enforce Town land use regulations or other legulations or other legulations or other legulations	
	BMP #4-1a:	Implement and enforce land use regulations	Page 4-1
	BMP #4-1b:	Establish interagency or inter-jurisdictional Agreements	Page 4-1
BMP #4-2:		implement a plan outlining interdepartmental n site plan review and approval	Page 4-2
BMP #4-3:	Review site p	lans for stormwater quality concerns	Page 4-2
BMP #4-4:	Conduct Site	Inspections	Page 4-2

	BMP #4-5:	Consideration	of public input	.Page 4-2
	BMP #4-6:	registration ur Stormwater a	ction site operators of the requirements for nder "General Permit for the Discharge of nd Dewatering Wastewaters Associated with Activities"	.Page 4-3
	BMP #4-7:	Implementation	mpliance with the Connecticut Anti-Degradation on Policy in the Water Quality Standards for all new discharges to High Quality Waters from the MS4	
	BMP #4-8:		no new or increased discharges to Impaired he MS4	.Page 4-3
	BMP #4-9:	Retain Water located less the	Quality Volume for all new stormwater discharges nan 500 feet from a tidal wetland	.Page 4-4
	BMP #4-10:	Obtain require coastal jurisdi	ed permits for stormwater discharges below the ction line	.Page 4-4
Sectio			Post Construction Stormwater Managemer and Redevelopment	nt in
	BMP #5-1:	development	l authority and guidelines regarding low impact (LID) and runoff reduction in site development	.Page 5-1
l	BMP #5-2:	Enforce LID/ru	unoff reduction requirements for development and	.Page 5-2
	BMP #5-3:		g-term maintenance plan for stormwater basins structures	Page 5-3
1	BMP #5-4:	DCIA mapping	J	Page 5-3
I	BMP #5-5:	Address post-	construction issues in areas with pollutants of	
İ	BMP #5-6:	New Discharg	d maintain any control measures or conditions for e to an Impaired Water without an Established	Page 5-4
I		Additional req water with an	uirements for all new and existing discharges to a Established TMDL or with a Pollutant Load ecified within the TMDL	
Section		l Measure 6: pal Operatio	Pollution Prevention/Good Housekeeping f	or
l	BMP #6-1:	Continue the funder the 200	ormal employee training program developed 4 MS4 General Permit	Page 6-1
I	BMP #6-2:	Implement MS	64 property and operations maintenance:	Page 6-1
		BMP #6-2a:	Minimize the discharge of pollutants to MS4 from parks and open space management	Page 6-1
		BMP #6-2b:	Minimize the discharge of pollutants to MS4 from	

		pet waste management	Page 6-2
	BMP #6-2c:	Minimize the discharge of pollutants to MS4 from waterfowl management	
	BMP #6-2d:	Minimize the discharge of pollutants to MS4 from municipal buildings and facilities	
	BMP #6-2e:	Minimize the discharge of pollutants to MS4 from municipal vehicle and equipment maintenance	
	BMP #6-2f:	Minimize the discharge of pollutants to MS4 from leaf management	
BMP #6-3:	Implement co	ordination with interconnected MS4s	Page 6-4
BMP #6-4:		mplement a program to control other sources of he MS4	Page 6-4
BMP #6-5:	Additional me	asures for discharges to impaired waters	Page 6-4
BMP #6-6:	Track projects	s that disconnect DCIA	Page 6-5
BMP #6-7:	Develop and i Program	mplement infrastructure repair/rehabilitation	Page 6-6
BMP #6-8:	Develop plan	to identify/prioritize retrofit projects	Page 6-6
BMP #6-9:	Develop/imple	ement street sweeping program	Page 6-7
BMP #6-10:	Develop/imple	ement catch basin cleaning program	Page 6-7
BMP #6-11:	Develop/imple	ement snow management practices	Page 6-9
	BMP #6-11a:	Deicing Material Management	Page 6-9
	BMP #6-11b:	Snow and Ice Control Practices	Page 6-9
Section 7 – Monito	oring Require	ements	
BMP #7-1:	Screen all Out	tfalls that Discharge to Impaired Waters	Page 7-1
BMP #7-2:	Inventory and	mapping of discharges to impaired waters	Page 7-3
BMP #7-3:	Follow-up Inve	estigations of drainage areas	Page 7-3
BMP #7-4:	Annual monito	oring of priority outfalls	Page 7-3
Section 8 - Water	Quality Prote	ection for Receiving Waters	
Section 8.1	Receiving W	aters	Page 8-1
Section 8.2	_	o Impaired Waters or Water bodies Pollutant Load Reduction within a TMDL	Page 8-2
Section 8.3		o High Quality Waters	_
Section 9 – SWMP	[,] Certification	1	

Figures - Figure 1: MS4 Jurisdictions - Town of Groton and Interconnected MS4s

- Appendix A Summary of BMPs by Minimum Control Measure
- Appendix B General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (MS4s)
- Appendix C General Permit Registration Form for the Discharge of Stormwater from Small MS4s

Executive Summary

This document presents the Stormwater Management Plan (SWMP) for the Town of Groton¹. The SWMP was developed to meet the requirements of the Connecticut Department of Energy & Environmental Protection (DEEP) General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (MS4s), issued January 20, 2016 and effective July 1, 2017. The MS4 General Permit defines stormwater as waters consisting of rainfall runoff, including snow or ice melt during a rain event.

The MS4 General Permit mandates the Town develop, implement and enforce Best Management Practices (BMPs) for the six Minimum Control Measures listed in the MS4 General Permit. BMPs are defined for each Minimum Control Measure and are described in Sections 1 through 6 of this document and are summarized in Appendix A. Descriptions for each BMP include the designation of a responsible person(s), a time line for implementation, location (where appropriate), and measurable goal(s).

In addition to the six minimum control measures, the permit requires the Town to implement a screening and monitoring program for all outfalls that discharge to impaired waters as defined in the most recent *Connecticut Integrated Water Quality Report*. BMPs for the screening and monitoring program are described in Section 7 of this document. The Town must also meet certain criteria for discharges to impaired waters, water for which nitrogen, phosphorus, bacteria, or mercury are Stormwater Pollutants of Concern, or waters which have pollution load reductions specified within a Total Maximum Daily Load (TMDL: water quality implementation plan established pursuant to Section 303 of the Clean Water Act). Also, there are requirements for new discharges to both impaired waters and high quality waters. Impaired waters and high quality waters within the Town of Groton are described in Section 8 of this document.

The Town has operated under a Stormwater Management Plan since July 2004. This document replaces the original SWMP and incorporates requirements of the MS4 General Permit issued January 20, 2016. A copy of the MS4 General Permit is located in Appendix B. The Town will continue to utilize the Stormwater Committee established under the 2004 MS4 General Permit to coordinate activities and monitor the progress of the SWMP implementation and execution.

The Public Works Department (PWD) will be the lead Department to ensure implementation of the SWMP within the established time line. The Director of Public Works or his/her designee will be the "Stormwater Coordinator" for the SWMP. Responsibilities include coordinating tasks among Town departments, completing the Annual Report to DEEP, and ensuring the BMPs listed in the SWMP are completed. An Implementation Schedule for the various BMPs follows (Table 1).

An Annual Report for the preceding calendar year must be electronically submitted to DEEP by April 1st annually. The Annual Report shall include: a written discussion of the status of compliance with the MS4 General Permit, all monitoring data collected and analyzed, and all other information collected and analyzed, including data collected under the Illicit Discharge Detection Protocol, during the reporting period. The Annual Report must be available for review

¹The City of Groton, Groton Long Point, federal and state properties maintain stormwater infrastructure in their respective geographical areas and therefore are not covered by this plan (See Figure 1). It is up to each entity to determine if the MS4 General Permit applies to it.

and comment by the public both at a physical location and electronically by January 31st each year, prior to submission to DEEP.

The Town must submit the MS4 General Permit registration and the SWMP to the DEEP and have them both physically and electronically available for public review and comment by April 1, 2017. Both the registration and SWMP will be available during regular business hours at the Town Hall Annex and posted to the Town's website to fulfill that requirement. A copy of the registration is located in Appendix C.

Table 1: Implementation Schedule

Due Date	Task Description	BMP#	Page #	MS4 Permit Reference	MS4 Permit Page #
	Effective date of MS4 General Permit	NA	ES-1	3(e)	12
	Develop and implement a plan outlining interdepartmental coordination in site plan review and approval	4-2	4-2	6(a)(4)(B)	26
	Review site plans for stormwater quality concerns	4-3	4-2	6(a)(4)(C)	26
	Consideration of public input	4-5	4-2	6(a)(4)(D)	26
	Notify construction site operators of the requirements for registration under "General Permit for the Discharge of Stormwater and Dewatering Wastewaters Associated with Construction Activities"	4-6	4-3	6(a)(4)(E)	26
	Document compliance with the Connecticut Anti- Degradation Implementation Policy in the Water Quality Standards for all new or increased discharges to High Quality Waters from the MS4	4-7	4-3	3(b)(6)	9
7/1/2017	Demonstrate no new or increased discharges to Impaired Waters from the MS4	4-8	4-3	3(b)(7)	9
	Retain Water Quality Volume for all new stormwater discharges located less than 500 feet from a tidal wetland	4-9	4-4	5(a)(1)	17
	Obtain required permits for stormwater discharges below the coastal jurisdiction line	4-10	4-4	5(a)(2)	17
	Implement and maintain any control measures or conditions for New Discharge to an Impaired Water without an Established TMDL	5-6	5-4	6(k)(1)&(3)	47
	Additional requirements for all new and existing discharges to a water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL	5-7	5-5	6(k)(2)&(4)	47
	Track projects that disconnect DCIA	6-6	6-5	6(a)(6)(B)(ii)(a)	32
	Develop and implement infrastructure repair/rehabilitation program	6-7	6-6	6(a)(6)(B)(i)(a)	31
12/31/2017	Continue the formal employee training program developed under the 2004 MS4 General Permit	6-1	6-1	6(a)(6)(A)	31
	Implement MS4 property and operations maintenance	6-2	6-1	6(a)(6)(C)	33
	Develop and implement a program to control other sources of pollutants to the MS4	6-4	6-4	6(a)(6)(G)	38
	Additional measures for discharges to impaired waters	6-5	6-4	6(a)(6)(H)	38
	Develop/implement street sweeping program	6-9	6-7	6(a)(6)(D)(i)	35
	Develop/implement snow management practices	6-11	6-9	6(a)(6)(E)	37
1/31/2018	Comply with public notice requirements for the SWMP and Annual Reports	2-1	2-1	6(a)(2)(A)	21

Table 1: Implementation Schedule (Continued)

Year 1 (July 1	, 2017 - June 30, 2018) Continued			*	·
Due Date	Task Description	BMP#	Page #	MS4 Permit Reference	MS4 Permit Page #
4/1/2018	Submit Annual Report and public comments/responses to DEEP	NA	ES-1	6(j)(2)	45
	Implement Public Education Program	1-1 to 1-6	1-1	6(a)(1)	19
	Stormwater Committee Meetings	2-2	2-1		
	Sponsor community participation event	2-3	2-1	6(a)(2)	21
	Develop a written IDDE Program	3-1	3-1	6(a)(3)	22
	Develop a program for citizen reporting of illicit discharges	3-3	3-2	6(a)(3)(A)(iii)	22
6/30/2018	Establish legal authority to prohibit and remove illicit discharges	3-4	3-2	6(a)(3)(B)	23
	Develop record keeping system for IDDE tracking	3-5	3-2	6(a)(3)(A)(v)	23
	Address IDDE in areas with pollutants of concern	3-6	3-3	6(a)(3)(D)	24
	Screen all Outfalls that Discharge to Impaired Waters: Begin Screening	7-1	7-1	6(i)	41
Year 2 (July 1	, 2018 - June 30, 2019)	<u> </u>			
Due Date	Task Description	BMP#	Page #	MS4 Permit Reference	MS4 Permit Page #
	Develop list and maps of all MS4 stormwater outfalls in urbanized and priority areas	3-2	3-1	6(a)(3)(C)	23
	Implement and enforce Town land use regulations or other legal authority to meet requirements of MS4 General Permit	4-1	4-1	6(a)(4)(A)	25
	Conduct Site Inspections	4-4	4-2	6(a)(4)(A)(c) & 6(a)(4)(C)	25 & 26
6/30/2019	Enforce LID/runoff reduction requirements for development and redevelopment projects	5-2	5-2	6(a)(5)(B)	28
	Implement long-term maintenance plan for stormwater basins and treatment structures	5-3	5-3	6(a)(5)(D)	30
	Address post-construction issues in areas with pollutants of concern	5-5	5-4	6(a)(5)(E)	31
	Inventory and mapping of discharges to impaired waters	7-2	7-3	6(i)(1)	41
	Follow-up Investigations of drainage areas: commence follow-up investigations	7-3	7-3	6(i)(1)(D)	43
	Implement coordination with interconnected MS4s	6-3	6-4	6(a)(6)(F)	38

Table 1: Implementation Schedule (Continued)

Year 3 (July 1	, 2019 - June 30, 2020)				
Due Date	Task Description	BMP#	Page #	MS4 Permit Reference	MS4 Permit Page #
	DCIA mapping	5-4	5-3	6(a)(5)(C)	30
6/30/2020	Develop plan to identify/prioritize retrofit projects	6-8	6-6	6(a)(6)(B)(ii)	32
	Develop/implement catch basin cleaning program: Inspect all Town-owned catch basins within the Urbanized Area of the MS4 and outside the Urbanized Area within the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters at least once and clean as needed	6-10	6-7	6(a)(6)(D)(ii)	36
	Screen all Outfalls that Discharge to Impaired Waters: Screen 50% of outfalls that discharge to impaired waters	7-1	7-1	6(i)(1)(E)(ii)	44
	Follow-up Investigations of drainage areas: implement control measures	7-3	7-3	6(i)(1)(D)(ii)	43
Year 4 (July 1	, 2020 - June 30, 2021)				
Due Date	Task Description	BMP#	Page #	MS4 Permit Reference	MS4 Permit Page #
7/1/2020	Annual monitoring of priority outfalls	7-4	7-3	6(i)(1)(E)(iv)	44
	Establish legal authority and guidelines regarding low impact development (LID) and runoff reduction in site development planning	5-1	5-1	6(a)(5)(A)	27
6/30/2021	Develop and implement a retrofit program with the goal to "disconnect" existing DCIA: Disconnect 1% DCIA (or 2% in 5th Year)	6-6	6-5	6(a)(6)(B)(ii)(c)	33
Year 5 (July 1	, 2021 - June 30, 2022)				
Due Date	Task Description	BMP#	Page #	MS4 Permit Reference	MS4 Permit Page #
6/30/2022	Develop and implement a retrofit program with the goal to "disconnect" existing DCIA: Disconnect 2% DCIA (or 1% if 1% disconnected in 4th Year)	6-6	6-5	6(a)(6)(B)(ii)(c)	33
	Develop/implement catch basin cleaning program: Inspect all catch basins outside the Urbanized Area and outside the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters and clean as needed	6-10	6-7	6(a)(6)(D)(ii)	36
	Screen all Outfalls that Discharge to Impaired Waters: Screen 100% of outfalls that discharge to impaired waters	7-1	7-1	6(i)(1)(E)(ii)	44

Section 1

Control Measure 1: Public Education and Outreach

According to the DEEP MS4 General Permit, the goals of this minimum control measure are to:

- Raise awareness that polluted Stormwater runoff is the most significant source of water quality problems;
- Motivate residents to use BMPs which reduce polluted Stormwater runoff; and
- Reduce polluted Stormwater runoff as a result of increased awareness and utilization of BMPs.

The following public education/outreach BMPs will be implemented to fulfill the requirements of Control Measure 1:

BMP #1-1 Implement public education program

Description: Implement a public education program to distribute educational materials to the community to achieve the goals of this control measure. A public outreach strategy was developed using suggestions from the EPA's MS4 Program Evaluation Guidance. In order to streamline the public education program, the following message was developed: Small preventative measures incorporated into regular everyday activities like lawn and auto care and pet waste disposal can help prevent contaminated pollutants from reaching the waterbodies we use for swimming, fishing and drinking water.

As part of implementing the program, the Public Works Department (PWD) will periodically post on social media educational information discussing stormwater management issues as required by the six Minimum Control Measures (MCMs) including tailored and targeted messages for:

- Impaired waters associated with a Stormwater Pollutant of Concern (BMP #1-2);
- Informing the public about the hazards associated with improper waste disposal and illegal discharges to the MS4 (MCM-3).

Further implementation of the program is discussed in BMPs #1-2 through #1-7.

Measureable Goal: Post educational information on social media annually.

Schedule: By June 30, 2018 (the end of the first MS4 General Permit year) prepare postings for social media.

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #1-2 Address education/outreach for pollutants of concern

Description: Implement additional measures for discharges to waters associated with the following Stormwater Pollutants of Concern: Phosphorus, Nitrogen, Bacteria, and Mercury. Educational materials will be developed as needed to specifically tailor and target education on the sources, impacts, and available pollution reduction practices for the Stormwater Pollutant of Concern in accordance with Section 6(a)(1)(C) of the MS4 General Permit.

As discussed under BMP #1-1, the PWD will prepare at least one post for social media addressing Stormwater Pollutants of Concern and their sources, impacts, and available pollution

reduction practices. The Town will also post this material on its Stormwater Webpage under BMP #1-4.

Measureable Goal: One post to social media addressing Stormwater Pollutants of Concern.

Schedule: By June 30, 2018 (the end of the first MS4 General Permit year)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #1-3 Stormwater information provided on local cable access

Description: Programs discussing Stormwater management will be aired on the local cable access channel annually. The Non-point Education for Municipal Officials (NEMO) video, "Luck Isn't Enough, the Fight for Clean Water", that covers stormwater management topics pertinent to coastal towns along Long Island Sound and the DEEPs public service announcement 'Clean Water Starts With You' part of the Think Blue Connecticut initiative, have been aired on GMTV Channel 2 on Comcast Cable of Groton and Thames Valley Communications that cablecast to approximately 40,000 homes in Groton, Stonington, North Stonington, Ledyard and Voluntown. GMTV is also available through streaming video on the Town's website. The Town will periodically review programs to air to ensure information is current.

Measureable Goal: Program on local cable access channel aired annually

Schedule: By June 30, 2018 (the end of the first MS4 General Permit year), review Stormwater educational programs and determine which program(s) to air.

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #1-4 Stormwater information provided on the Town's website

Description: In accordance with Control Measure 3, the PWD developed a stormwater webpage hosted on the Town's website to inform the public about the hazards associated with improper waste disposal and illegal discharges to the MS4. The webpage is updated to inform citizens of the availability of the Annual Report and correct any outdated information. The Town will revise its Stormwater webpage in accord with BMP #1-2 to prepare tailored and targeted messages for impaired waters associated with a Stormwater Pollutant of Concern and BMP #6-9 to inform residents and businesses of stormwater management issues.

Measureable Goal: Update Stormwater webpage annually.

Schedule: Update Stormwater webpage annually.

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #1-5 Educate dog owners about picking up pet waste

Description: Distribute a fact sheet with every dog license in Groton. Fact sheets will be included with each dog license issued by the Town Clerk's Office. The PWD selected a brochure supported by the Long Island Sound Study (LISS) entitled "Step by Step, A citizen's guide to curbing polluted runoff", since one of its primary topics is the proper disposal of pet waste. Additionally, the Town advertises the locations of its pet waste stations to the public on its website.

Measureable Goal: Pet waste fact sheets distributed to licensed dog owners with annual dog license

Schedule: Include brochure with dog license annually.

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #1-6: Install and maintain no dumping signs at coastal access areas

Description: Install and maintain signs telling people not to dump at public coastal access points.

Measureable Goal: 100% of existing signs inspected annually.

Schedule: Annually inspect all signs and repair them as necessary.

Responsible Person/Department: Gary J. Schneider, Director of Public Works

Section 2

Control Measure 2: Public Participation and Involvement

Control Measure 2 requires opportunities be provided to engage the community to participate in the review and implementation of the Town's Stormwater Management Plan (SWMP). According to the MS4 General Permit, the goal of this minimum control measure is to involve the community in both the planning and implementation process of improving Stormwater quality. Public participation is beneficial to the success of a municipal Stormwater management program because it allows for broader public support, additional expertise, and a conduit to other programs. Community members are also more likely to apply these lessons/BMPs at home if they are part of the process.

The following public participation/involvement BMPs will be implemented to fulfill the requirements of Control Measure 2:

BMP #2-1: Comply with public notice requirements for the SWMP and Annual Reports

Description: Publish a public notice on the Town's website to inform the public of the SWMP and the Annual Report and to solicit comments from the public on the SWMP and Annual Report. The notice will provide a contact name (with phone number, address, and email) to whom the public can send comments and locations where the SWMP and Annual Report are available for public review (Town website, Town Hall Annex and Town of Groton Library). The public notice will allow for a 30 day comment period, at a minimum.

Measureable Goal: All required public notices posted by deadline

Schedule: Post notice for the draft SWMP by April 1, 2017 (90 days prior to effective date of MS4 General Permit) and post notices for the annual report 45 days prior to submittal to DEEP but no later than January 31st of each permit year

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #2-2: Stormwater Committee meetings

Description: Under the 2004 MS4 General Permit, the Town formed a Stormwater Committee to coordinate activities and monitor progress of the SWMP. The Committee is comprised of staff representatives from the Office of Planning and Development Services (OPDS), Parks and Recreation, Board of Education, and the Public Works Department (PWD). The Stormwater Coordinator (the Director of Public Works or his/her designee) chairs the committee.

Measureable Goal: One meeting held annually.

Schedule: Hold one meeting per year.

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #2-3: Sponsor community participation event

Description: The Town will hold one community participation event a year. The following events are typically held in Town:

 Annual International Coastal Cleanup Day: Save the Sound hosts a coastal cleanup at Bluff Point State Park in Groton on International Coastal Cleanup Day. Regional Household Hazardous Waste Collection Days: Town residents can go to any of the eight regional household hazardous waste collection days held annually within the Southern Connecticut Regional Resource Recovery Association (SCRRA) member towns. One of the eight collection days is held in the Town of Groton.

Depending on funding and participation, alternative events may be developed and held.

Measureable Goal: One event held annually

Schedule: One event will be held each year of the permit term.

Responsible Person/Department: Gary J. Schneider, Director of Public Works

Section 3

Control Measure 3: Illicit Discharge Detection and Elimination

Control Measure 3 requires the development of a written Illicit Discharge Detection and Elimination (IDDE) Program designed to: provide the legal authority to prohibit and eliminate illicit discharges to the MS4, find the source of any illicit discharges, eliminate those illicit discharges, and ensure ongoing screening and tracking to prevent and/or eliminate future illicit discharges. The MS4 General Permit requires the IDDE Program be implemented within the urbanized area and those catchment areas of the Town with either Directly Connected Impervious Area (DCIA) of greater than 11%, or which discharge to impaired waters.

The following Best Management Practices (BMPs) will be implemented to fulfill the requirements of Control Measure 3. Note that BMP #1-1 and #1-4 will be used to fulfill the public information program requirement of this control measure, and BMP #6-1 will be used to educate Town employees about the IDDE program, including how to recognize illicit discharges and Sanitary Sewer Overflows (SSOs). The frequency and type of employee training will be reported in the Annual Report.

BMP #3-1: Develop a written Illicit Discharge Detection and Elimination Program

Description: Develop a written IDDE Program. The Town will review and update the IDDE Program developed under the 2004 MS4 General Permit to ensure it is consistent with the 2017 MS4 General Permit.

In accordance with section (A)(7) of Appendix B of the MS4 General Permit, the written IDDE Program shall include each of the elements described below:

- Legal Authority
- Statement of IDDE Program Responsibilities
- Assessment and Priority Ranking of Catchments
- Outfall and Interconnection Screening and Sampling
- Catchment Investigation Procedure
- Removal and Confirmation Procedure
- Follow-up Screening
- Illicit Discharge Prevention Procedures

Measureable Goal: Written IDDE Program developed by schedule deadline

Schedule: By June 30, 2018 (within 1 year from the effective date of the MS4 General Permit).

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #3-2: Develop list and maps of all MS4 stormwater outfalls in urbanized and priority areas

Description: Develop a list (spreadsheet or database) and map or series of maps showing all stormwater discharges from a Town-owned or -operated pipe or conduit located within the MS4,

and all interconnections with other MS4s pursuant to Section (6)(a)(3) and Appendix B of the MS4 General Permit.

Measureable Goal: Outfall and Interconnections inventory and map completed by deadline Schedule: By June 30, 2019 (within 2 years from the effective date of the MS4 General Permit) Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #3-3: Develop a program for citizen reporting of illicit discharges

Description: Written program for citizen reporting of illicit discharges as part of BMP #3-1 and affirmatively investigate and eliminate any illicit discharges reported provided such report incorporates at least a time and location of an observed discharge. All citizen reports and the responses to the reports shall be included in the Annual Report. Currently, the Town's Stormwater webpage directs citizen reporting of illicit discharges to the Public Works Department main line.

Measureable Goal: Formal written program developed by deadline

Schedule: The citizen reporting program will be developed as part of the written IDDE Program that is required by June 30, 2018 (within 1 year from the effective date of the MS4 General Permit)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #3-4: Establish legal authority to prohibit illicit discharges

Description: Establish the necessary and enforceable legal authority by statute, ordinance, rules and regulations, permit, easement, contract, order or any other means, to eliminate illicit discharges. The Town will develop an ordinance to establish the legal authority in accordance with Section 6(a)(3) and Section (A)(7)(a) of Appendix B of the MS4 General Permit.

Measureable Goal: Ordinance passed by Town Council by deadline

Schedule: By June 30, 2018 (within 1 year from the effective date of the MS4 General Permit).

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #3-5: Develop record keeping system for IDDE tracking

Description: Maintain a record of illicit discharge abatement activities by creating a record keeping system for IDDE tracking that will include, at a minimum: location (identified with an address or latitude and longitude), description, date(s) of inspection, sampling data (if applicable), action(s) taken, date of removal or repair and responsible party(ies). This information will be included in the Annual Report.

In addition, develop an inventory of all known locations where Sanitary Sewer Overflows (SSOs) have discharged to the MS4 within the previous five years. The SSO inventory will record the location, date and time of occurrence, estimated volume of discharge, a description of known or suspected cause, and details about mitigating measures including dates of implementation. The SSO inventory will be updated and included in the Annual Report, including the status of mitigation and corrective measures implemented to address the SSO.

Measureable Goal: IDDE tracking spreadsheet and SSO Inventory developed by deadlines and updated upon occurrence or at least annually and reported in the Annual Report

Schedule: By October 27, 2017 for SSO Inventory and June 30, 2018 (within 1 year from the effective date of the MS4 General Permit)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #3-6: Address IDDE in areas with pollutants of concern

Description: For waters for which Phosphorus, Nitrogen, or Bacteria is a Stormwater Pollutant of Concern, the IDDE program shall give priority to areas with the highest potential to discharge these pollutants to the MS4 in order to address septic system failures. Such areas shall be identified based on assessment of the following criteria: historic on-site sanitary system failures, proximity to bacteria impaired waters, low infiltrative soils, and shallow groundwater. The Ledge Light Health District (LLHD) is responsible for identifying, correcting and permitting on-site sanitary systems and will be requested to provide required information on the location and status of failed septic systems within the Town. The following will be included in the Annual Report: Summary of the program, the location of failing systems, and actions taken to respond to and address the failures.

Measureable Goal: Areas with failing septic systems identified by the deadline; % of failing systems addressed annually

Schedule: By June 30, 2018 (within 1 year from the effective date of the MS4 General Permit) Responsible Person/Department: Gary J. Schneider, Director of Public Works

Section 4

Control Measure 4: Construction Site Runoff Control

Control Measure 4 requires implementation and enforcement of a program to control Stormwater discharges to the MS4 associated with land disturbance or development (including re-development) activities from sites (as defined in the DEEP's General Permit for the Discharge of Stormwater and Dewatering Wastewaters from Construction Activities) with one acre or more of soil disturbance, whether considered individually or collectively as part of a larger common plan.

The Town has developed the following BMPs to reduce pollutants in stormwater runoff from construction activities.

BMP #4-1: Implement and enforce Town land use regulations or other legal authority to meet requirements of MS4 General Permit

BMP #4-1a: Implement and enforce Town land use regulations

Description: Implement and enforce Town land use regulations by ordinance, bylaw, regulation, standard condition of approval or other appropriate legal authority that requires:

- Developers, construction site operators, or contractors to maintain consistency with the 2002 Guidelines for Soil Erosion and Sedimentation Control, as amended, the Connecticut Stormwater Quality Manual, and all Stormwater discharge permits issued by the DEEP within the municipal boundary pursuant to CFS 22a-430 and 22a-430b;
- The implementation of additional measures to protect/improve water quality (in addition to the above requirements) as deemed necessary by the municipality or institution;
- Inspection, surveillance and monitoring procedures necessary to determine compliance with Town regulations, ordinances, or programs related to the management of the MS4 by the MS4 operators;
- The owner of a site seeking development approval from the Town to provide and comply with a long term maintenance plan and schedule to ensure the performance and pollutant removal efficiency of privately-owed retention ponds, detention ponds and other Stormwater basins that discharge to or receive discharge from the Town's MS4;

Measureable Goal: Existing E&S control and stormwater regulations reviewed and revised as necessary by deadline

Schedule: Review and revise regulations by June 30, 2019 (within 2 years from the start of the Town's first fiscal year that begins after the effective date of this permit)

Responsible Person/Department: Jonathan Reiner, Director of Office of Planning and Developmental Services (OPDS)

BMP #4-1b: Establish interagency or inter-jurisdictional agreements

Description: Establish interagency or inter-jurisdictional agreements (Memorandums of Understanding (MOUs)) to control the contribution of pollutants between the Town's MS4 and MS4s owned and operated by others. Interconnected MS4 operators potentially include the City of Groton, Groton Long Point, Town of Ledyard, the U.S. Navy Submarine Base, the Groton New London Airport, and Connecticut Department of Transportation (DOT).

Measureable Goal: Interagency or inter-jurisdictional agreements established to control the contribution of pollutants between the Town's MS4 and MS4s owned and operated by others

Schedule: Establish interagency or inter-jurisdictional agreements by June 30, 2019 (within 2 years from the start of the Town's first fiscal year that begins after the effective date of this permit)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #4-2: Develop and implement a plan outlining interdepartmental coordination in site plan review and approval

Description: Outline how all Town departments and boards with jurisdiction over the review, permitting, or approval of land disturbances and development projects within the MS4 will coordinate their functions with one another.

Measureable Goal: Site plan review and approval procedures outlined

Schedule: By June 30, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-3: Review site plans for stormwater quality concerns

Description: Conduct site plan reviews that incorporate consideration of stormwater controls or management practices to prevent or minimize impacts to water quality.

Measureable Goals: 100% of site plans received are reviewed prior to approval for E&S control to prevent or minimize impacts to water quality

Schedule: Implement measure by July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-4: Conduct Site Inspections

Description: Conduct site inspection(s) and enforcement to assess the adequacy of the installation, maintenance, operation, and repair of construction control measures and where allowed, post construction control measures.

Measureable Goal: Formal inspection checklist reviewed and revised as necessary by deadline, 100% of site inspections conducted for all sites constructed within reporting period, and percent of resolutions achieved after discovery of deficiency

Schedule: Review and revise inspection checklist and conduct site inspections by June 30, 2019 (within 2 years from the start of the Town's first fiscal year that begins after the effective date of this permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-5: Consideration of public input

Description: Implement a procedure for receipt and consideration of information submitted by the public concerning proposed and ongoing land disturbance and development activities. Currently any project requiring approval by a land use agency or commission is presented at a public meeting. Projects not presented at a public meeting will be posted to the Town's website

and a contact name (with phone number, address, and email) to whom the public can send comments will be provided.

Measureable Goals: Public meetings held by Planning, Zoning and Inland Wetlands Agency for 100% of eligible projects (Annual Report will provide number of meetings held). 100% of projects posted on Town website when not presented at a meeting (Annual report will list those projects).

Schedule: Implement procedure by July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-6: Notify construction site operators of the requirements for registration under "General Permit for the Discharge of Stormwater and Dewatering Wastewaters Associated with Construction Activities"

Description: Develop a procedure for notifying developers and contractors of their potential obligation to obtain authorization under the DEEP's General Permit for the Discharge of Stormwater and Dewatering Wastewaters Associated with Construction Activities with a provision in the notification informing the developer/contractor of their obligation to provide a copy of the Stormwater Pollution Control Plan to the Town upon request.

Measureable Goal: Flyers provided in 100% of preconstruction meetings and land use application reviews

Schedule: Implement procedure by July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-7: Document compliance with the Connecticut Anti-Degradation Implementation Policy in the Water Quality Standards for all new or increased discharges to High Quality Waters from the MS4

Description: On or before thirty (30) days prior to the commencement of a new or increased discharge to a High Quality Water from the MS4, document compliance with the Connecticut Anti-Degradation Implementation Policy in the Water Quality Standards, as amended. Before commencing any new or increased discharge, identify in its Stormwater Management Plan (SWMP), the control measures to be implemented to ensure compliance with anti-degradation provisions and the terms of the MS4 General Permit. At a minimum, evaluate and implement to the Maximum Extent Practicable practices which will prevent the discharge of the Water Quality Volume to a surface water body or other practices necessary to protect and maintain designated uses and meet standards and criteria contained in the Water Quality Standards.

Measureable Goals: 100% compliance with CT Anti-Degradation Implementation policy for all new or increased discharges to high quality waters

Schedule: By July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-8: Demonstrate no new or increased discharges to Impaired Waters from the MS4

Description: The MS4 General Permit does not allow increased discharges from the MS4 to impaired waters listed in categories 5 or 4b of the most recent Connecticut Integrated Water Quality Report of waters listed pursuant to Clean Water Act section 303(d) and 305(b) unless

demonstrated that there is no net increase in loading by the MS4 to the impaired water of the pollutant(s) for which the waterbody is impaired. Demonstrate no net increase by either:

- Documenting that the pollutant(s) for which the waterbody is impaired is not present in the MS4's discharge and retain documentation of this finding with the SWMP; or
- Documenting that the total load of the pollutant(s) of concern from the MS4 to any
 impaired portion of the receiving water will not increase as a result of the activity and
 retain documentation of this finding in the Plan. Compliance with the requirements for
 Runoff Reduction and Low Impact Development measures for new development and
 redevelopment in Sections 6(a)(5)(A) and (B) shall be considered as demonstrating no
 net increase. Requirements for discharges to impaired waters are included in Section
 6(k) of the MS4 General Permit.

Measureable Goals: Zero net increases in loading of pollutant(s) of concern to discharges from MS4 to Impaired Waters

Schedule: By July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-9: Retain Water Quality Volume for all new stormwater discharges located less than 500 feet from a tidal wetland

Description: For initiation, creation, or origination of a discharge of stormwater which is located less than 500 feet from a tidal wetland that is not a fresh-tidal wetland, such discharge shall flow through a system designed to retain the Water Quality Volume, as defined in Section 2 of the MS4 General Permit.

Measureable Goals: 100% Water Quality Volume retained for all new stormwater discharges located less than 500 feet from a tidal wetland that is not a fresh-tidal wetland

Schedule: By July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #4-10: Obtain required permits for stormwater discharges below the coastal jurisdiction line

Description: For initiation, creation, or origination of a discharge of stormwater below the coastal jurisdiction line into coastal, tidal, or navigable waters for which a permit is required under the Structures and Dredging Act in accordance with Section 22a-361(a) of the Connecticut General Statutes or into tidal wetlands for which a permit is required under the Tidal Wetlands Act in accordance with Section 22a-32 of the Connecticut General Statutes, obtain such permit(s) from the Commissioner prior to initiating, creating or originating such discharge.

Measureable Goals: 100% of all required permits obtained for all new stormwater discharges below the coastal jurisdiction line

Schedule: By July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

Section 5

Control Measure 5: Post-construction Stormwater Management in New Development and Redevelopment

Control Measure 5 requires a program to address stormwater runoff from new or redevelopment projects that disturb one or more acres of land. The following BMPs for new development and redevelopment will be implemented to fulfill the requirements of Control Measure 5:

BMP #5-1: Establish legal authority and guidelines regarding low impact development (LID) and runoff reduction in site development planning

Description: Establish legal authority as outlined below:

- Establish through zoning and sub-division regulations, to the MEP, that a developer or contractor seeking the Town's approval shall consider the use of low impact development (LID) and runoff reduction site planning and development practices prior to the consideration of other practices in the Town's land use regulations, guidance, or construction project requirements to meet or exceed those LID and runoff reduction practices identified in the Stormwater Quality Manual and include the following standards:
 - Retain on-site half the water quality volume for the site for redevelopment of sites that are currently developed with Directly Connected Impervious Area (DCIA) of forty percent or more.
 - Retain the water quality volume for the site for new development and redevelopment of sites with less than forty percent DCIA.
 - o An alternate retention/treatment standard as outline in Section (6)(a)(5)(B)(i)-(ii) of the MS4 General Permit in cases where the entire amount cannot be retained.
- Identify and, where appropriate, reduce or eliminate existing local regulatory barriers to implementing LID and runoff practices to the MEP that address minimal dimensional criteria for the creation of roadways, parking lots, and other DCIA.
- Consider the following watershed protection elements to manage the impacts of stormwater on receiving waters:
 - o Minimize the amount of impervious surfaces (roads, parking lots, roofs, etc.) within the Town.
 - Preserve, protect, create and restore ecologically sensitive areas that provide water quality benefits and serve critical watershed function.
 - Implement Stormwater management practices that prevent or reduce thermal impacts to streams.
 - Seek to avoid or prevent hydromodification of streams and other waterbodies caused by development.
 - o Implement standards to protect trees, and other vegetation.
 - o Implement policies to protect native soils, prevent topsoil stripping, and prevent compaction of soils.

Measureable Goal: By deadline: 1) Legal authority established for LID and runoff reduction practices; 2) Identification and, where appropriate, reduction or elimination of existing local regulatory barriers to implementing LID and runoff practices; and 3) Consideration of the watershed protection elements to manage the impacts of stormwater on receiving waters implemented.

Schedule: Establish legal authority by June 30, 2021 (within 4 years of the effective date of the MS4 General Permit). Prior to implementing legal authority, consider the elements of Section (6)(a)(5)(A) of the MS4 General Permit during regular reviews.

Responsible Persons/Departments: Jonathan Reiner, Director of OPDS

BMP #5-2: Enforce LID/runoff reduction requirements for development and redevelopment projects

Description:

Require runoff reduction/low impact development (LID) measures be used by developers in accordance with Section (6)(a)(5)(A)(i)&(B) of the MS4 General Permit:

- Retain on-site half the water quality volume for the site for development or redevelopment of sites that are currently developed with DCIA of forty percent or more. In cases where this entire amount cannot be retained, the Town shall require the developer to:
 - Retain runoff volume to the maximum extent achievable using control measures that are technologically available and economically practicable and achievable in light of best industry practice.
 - Require additional Stormwater treatment for sediment, floatables and nutrients for the volume above that which can be retained up to the water quality volume.
 - o If the runoff reduction cannot be met, the developer must:
 - Submit a report detailing factors limiting the capability of achieving this goal for the Town's review. The report shall include:
 - > The measures taken to maximize runoff reduction practices on the site;
 - > The reasons why those practices constitute the maximum extent achievable;
 - > The alternative retention volume;
 - Description of the measures used to provide additional Stormwater treatment above the alternative volume up to the water quality volume.
 - Propose a Stormwater mitigation project on another site.
 - In the case of linear redevelopment projects (e.g. roadway reconstruction or widening) for the developed portion of the right-of-way:
 - For projects that may be unable to comply with the full retention standard, the alternative retention and treatment provisions may also be applied as specified above, or
 - ➤ For projects that will not increase the DCIA within a given watershed, the developer shall implement the additional Stormwater treatment measures referenced above but will not be required to retain half of the water quality volume.
- Retain the water quality volume for the site for development or redevelopment of sites
 with less than forty percent DCIA. If there are site constraints that would prevent
 retention of this volume on-site (e.g. brownfields, capped landfills, bedrock, elevated
 groundwater, etc.), the developer must:
 - o Submit documentation for the Town's review and written approval, which:
 - Explains the site limitations;
 - Provides a description of the runoff reduction practices implemented;

- Provides and explanation of why this constitutes the maximum extent achievable:
- Offers an alternative retention volume; and
- Provides a description of the measures used to provide additional Stormwater treatment for sediment, floatables, and nutrients above the alternative volume up to the water quality volume.
- o Propose a Stormwater mitigation project on another site.
- Design, install, and maintain any such treatments consistent with the Stormwater Quality Manual.
- o In the case of linear redevelopment projects that do not involve impervious surfaces (e.g. electrical transmission rights-of-way or natural gas pipelines), retention of the water quality volume is not required as long as the postdevelopment runoff characteristics do not differ significantly from predevelopment conditions.
- Consider the limitation of turf areas to those areas necessary to construct buildings, utilities, stormwater management measures, parking, access ways, reasonable lawn areas and contouring necessary to prevent future site erosion.
- Maintain consistency with the Connecticut Stormwater Quality Manual, or if inconsistent, provide an explanation of why consistency is not feasible or practicable and information that the proposed plan of development is adequately protective.

Measureable Goal: Percent of Water Quality Volume retained

Schedule: By June 30, 2019 (within 2 years of the effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #5-3: Implement long-term maintenance plan for stormwater basins and treatment structures

Description: Implement a maintenance plan for ensuring the long-term effectiveness of retention or detention ponds and stormwater treatment structures or measures located in the Urbanized Area and those catchment areas of the Town with either DCIA of greater than 11% or which discharge to impaired waters and which discharge to, or receive Stormwater from, the MS4. This includes ponds and structures owned by the Town or those for which the Town maintains an easement or other legal authority pursuant to Section (6)(a)(4)(A)(i) of the MS4 General Permit. At a minimum, annually inspect such retention or detention ponds and structures. Remove accumulated sediment to restore full solids capture design capacity where found to be in excess of 50% design capacity.

Measureable Goal: Inspect 100% of Town-owned stormwater basins and treatment structures annually

Schedule: By June 30, 2019 (within 2 years of the effective date of the MS4 General Permit)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #5-4: DCIA mapping

Description: Calculate the Directly Connected Impervious Area (DCIA) that contributes stormwater runoff to each of its MS4 outfalls (i.e. catchment areas) using mapping provided by the DEEP or other equivalent source. The DCIA calculation shall be based upon the criteria available through the DEEP Stormwater webpage. The Town anticipates using the Option 1

method to calculate DCIA that is outlined in Appendix 3 of the *Connecticut Watershed Response Plan for Impervious Cover*. This option provides a general assumption for the type of land use related to the MS4 outfall and only requires using the percent area of impervious cover (IC) calculated for the Town. Option 1 assumes connection between IC and DCIA in a contributing area that is mostly storm sewered with curb and gutter, and residential rooftops connected to the MS4. The equation to apply is:

DCIA%=0.1(%IC)^1.5

Document the progress of this task until its completion in the Annual Report and revise the DCIA estimate as development, redevelopment, or retrofit projects effectively add or remove DCIA to the MS4.

Measureable Goal: Percent of total outfalls for which DCIA has been mapped and calculated.

Schedule: Calculate DCIA for all outfalls by June 30, 2020 (within 3 years of the effective date of the MS4 General Permit)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #5-5: Address post-construction issues in areas with pollutants of concern

Description: For discharges to impaired waters for which Nitrogen, Phosphorus or Bacteria is a Stormwater Pollutant of Concern, implement and prioritize erosion and sediment problems noted during required inspections of retention or detention ponds and stormwater treatment structures or measures (BMP #5-3) under the Retrofit program specified in the MS4 General Permit (BMP #6-7) to correct the problems in a specific timeframe and to establish short and long term maintenance. The MS4 General Permit requires that each annual report include which areas were retrofitted, the cost of the retrofit, and the anticipated pollutant reduction.

Measureable Goal: Plan developed within 12 months of identification. 100 % of identified problems corrected within required timeframe.

Schedule: Begin to implement and prioritize erosion and sediment problems noted during required inspections of retention or detention ponds and stormwater treatment structures or measures under the Retrofit program by June 30, 2019 (within 2 years of the effective date of the MS4 General Permit)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #5-6: Implement and maintain any control measures or conditions for New Discharge to an Impaired Water without an Established TMDL

Description: If a new discharge to an impaired water without a TMDL is authorized pursuant to the conditions of Section 3(b)(7) of the MS4 General Permit, implement and maintain any control measures or conditions on the site that enabled such authorization, and modify such measures or conditions as necessary to maintain such authorization.

Measureable Goal: 100% of control measures or conditions implemented and maintained

Schedule: By July 1, 2017 (the effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

BMP #5-7: Additional requirements for all new and existing discharges to a water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL

Description: If a new discharge to a water with a TMDL or with a pollutant load reduction established within the TMDL is authorized pursuant to the conditions of Section 3(b)(7) of the MS4 General Permit, follow the discharge requirements consistent with the applicable Wasteload Allocations, Load Allocations or Water Quality Targets for that TMDL. For all existing discharges to a Water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL, implement BMPs as necessary to achieve the Waste Load Allocation, Load Allocation or Water Quality Targets specified within the TMDL (see Appendix D of the MS4 General Permit).

Measureable Goal: 100% of the discharge requirements consistent with the applicable Wasteload Allocations, Load Allocations or Water Quality Targets for that TMDL followed for new authorized discharges to a water with a TMDL or with a pollutant load reduction established within the TMDL; BMPs implemented as necessary for all existing discharges to a Water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL

Schedule: By July 1, 2017 (the effective date of the MS4 General Permit)

Responsible Person/Department: Jonathan Reiner, Director of OPDS

Section 6

Control Measure 6: Pollution Prevention/Good Housekeeping for Municipal Operations

The goal of Control Measure 6, Pollution Prevention/Good Housekeeping for Municipal Operations, is preventing or reducing pollutant runoff and protecting water quality from all permittee-owned or –operated MS4s. The following operation and maintenance BMPs will be implemented to fulfill the requirements of Control Measure 6:

BMP #6-1: Continue the formal employee training program developed under the 2004 MS4 General Permit

Description: Continue the formal employee training program developed under the 2004 MS4 General Permit to increase awareness of water quality related issues in management of the MS4. In addition to providing key staff with topical training regarding standard operating procedures and other activities necessary to comply with the provisions of the MS4 General Permit, include establishing an awareness of the general goals and objectives of the SWMP; identification and reporting of illicit discharges and improper disposal; and spill response protocols and respective responsibilities of involved personnel.

Measureable Goal: 100% of required operational employees trained annually

Schedule: Annually

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #6-2: Implement MS4 property and operations maintenance:

Description: Maintain properties, parks, and other facilities that are owned, operated, or otherwise the legal responsibility of the Town so as to minimize the discharge of pollutants to its MS4. This BMP has been further broken out into sub-categories (BMPs #6-2a - #6-2f) for parks and open space, pet waste management, waterfowl management, buildings and facilities, vehicles and equipment, and leaf management described below.

BMP #6-2a: Minimize the discharge of pollutants to MS4 from parks and open space management

Description: Maintain Parks and open space so as to minimize the discharge of pollutants to the MS4. Such maintenance includes:

- Application of fertilizers by municipal employees or contractors on lands and easements for which it is responsible for maintenance.
- Implement standard operating practices (SOPs) for the handling, storage, application, and disposal of pesticides and herbicides in compliance with applicable state and federal laws,
- Evaluate lawn maintenance and landscaping activities to promote water quality (reduced mowing frequencies, proper disposal of lawn clippings, and use of alternative landscaping materials like drought resistant and native plantings):
- Establish procedures for management of trash containers at parks.

• Establish practices for the proper disposal of grass clippings and leaves at Town-owned lands. Clippings shall be composted or otherwise appropriately disposed. Clippings should not enter the MS4 system or waters of the State.

Measureable Goals: 100% of existing SOP's reviewed and updated by deadline

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-2b: Minimize the discharge of pollutants to MS4 from pet waste management

Description: Manage pet waste to minimize the discharge of pollutants to the MS4. Such management includes:

- Identify locations within the community where inappropriate pet waste management practices are immediately apparent and pose a threat to receiving water quality due to proximity and potential for direct conveyance of waste to the storm system.
- In such areas, implement targeted management efforts such as public education and enforcement.
- Install educational signage, pet waste baggies, and disposal receptacles (or require carry-out) in Town-owned recreational areas where dog walking is allowed.

The MS4 General Permit requires the following be documented in the Annual Report: compliance activities including information regarding the scope and extent of education, compliance, and enforcement efforts.

Measureable Goals: 1) Locations with inappropriate pet waste management identified by deadline; and 2) % of locations where compliance activities are complete

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-2c: Minimize the discharge of pollutants to MS4 from waterfowl management

Description: Maintain waterfowl management so as to minimize the discharge of pollutants to the MS4. Such maintenance includes:

- Identify lands where waterfowl congregate and feeding by the public occurs;
- Install signage or use other targeted techniques to educate the public about the detrimental impacts of feeding waterfowl (including the resulting feces deposition) and discourage such feeding;
- Implement practices that discourage the undesirable congregation of waterfowl in these
 areas, or otherwise isolate the direct drainage from these areas away from its storm
 system and waters.

Measureable Goals: 1) Lands where waterfowl congregate and feed identified within schedule; 2) % of identified lands that have signs installed or other targeted techniques to educate public and discourage feeding; 3) % of identified lands that have practices implemented to prevent congregation and/or the areas of direct drainage isolated.

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Person/Departments: Gary J. Schneider, Director of Public Works

BMP #6-2d: Minimize the discharge of pollutants to MS4 from municipal buildings and facilities

Description: Maintain municipal buildings and facilities so as to minimize the discharge of pollutants to the MS4. Such maintenance includes:

- Evaluate the use, storage, and disposal of both petroleum and non-petroleum products;
- Ensure, through employee training, that those responsible for handling these products know proper procedures;
- Ensure that Spill Prevention Plans are in place, if applicable, and coordinate with the fire department as necessary;
- Develop management procedures for dumpsters and other waste management equipment;
- Sweep parking lots and keep areas surrounding the facilities clean to minimize runoff of pollutants; and
- Ensure that all interior building floor drains are not connected to the MS4. The MS4
 General Permit does not authorize such discharges; wastewaters from interior floor
 drains must be appropriately permitted.

Measureable Goals: 1) Procedures developed and implemented for dumpsters by deadline; 2) Parking lots swept annually; 3) Non-SWPPP facilities evaluated by deadline to ensure no interior floor drains connect to the MS4.

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-2e: Minimize the discharge of pollutants to MS4 from municipal vehicle and equipment maintenance

Description: Maintain vehicles and equipment so as to minimize the discharge of pollutants to the MS4. Such maintenance includes:

- Establish procedures for the storage of Town-owned or -operated vehicles;
- Require vehicles with fluid leaks to be stored indoors or in contained areas until repaired;
- Establish procedures to ensure that vehicle wash waters are not discharged to the municipal storm sewer system or to surface waters. The MS4 General Permit does not authorize such discharges; wastewaters from interior floor drains must be appropriately permitted.

Measureable Goals: By deadline: 1) Procedures established for Town vehicle storage; and 2) Procedures established to ensure that vehicle wash waters are not discharged to the MS4 or to surface waters.

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-2f: Minimize the discharge of pollutants to MS4 from leaf management

Description: Maintain leaf management so as to minimize the discharge of pollutants to the MS4. Establish and implement procedures to minimize or prevent the deposition of leaves in catch basins, streets, parking lots, driveways, sidewalks or other paved surfaces that discharge to the MS4. Such procedures also apply to leaves collected by the Town.

Measureable Goals: Problem streets swept annually in the fall as part of BMP #6-9; Educational information provided on the Town Stormwater webpage (BMP #1-4)

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-3: Implement coordination with interconnected MS4s

Description: As part of the interagency agreements established pursuant to Section (6)(a)(4)(A)(i)(e) and BMP #4-1, coordinate with operators of interconnected MS4s (such as neighboring municipalities, institutions and DOT) regarding the contribution of potential pollutants from the storm sewer systems, contributing land use areas and Stormwater control measures in the respective MS4s. This same coordination shall be conducted regarding operation and maintenance procedures utilized in the respective systems. Interconnected MS4 operators potentially include the City of Groton, Groton Long Point, Town of Ledyard, the U.S. Navy Submarine Base, the Groton New London Airport, and Connecticut Department of Transportation (DOT).

Measureable Goals: Interconnected MS4 coordination implemented within deadline

Schedule: By June 30, 2019 (within 2 years from the start of the Town's first fiscal year that begins after the effective date of this permit)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-4: Develop and implement a program to control other sources of pollutants to the MS4

Description: Develop and implement a program to control the contribution of pollutants to the MS4 from commercial, industrial, municipal, institutional or other facilities, not otherwise authorized by permit issued pursuant to Section 22a-430 or 22a-430b of the Connecticut General Statutes.

Measureable Goals: Program developed and implemented to control the contribution of pollutants to MS4 by deadline

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-5: Additional measures for discharges to impaired waters

Description: Implement measures for discharges from Town-owned or –operated lands to impaired waters (with or without a TMDL) as follows:

- For waters for which Nitrogen or Phosphorus is a Stormwater Pollutant of Concern: implement a turf management practices and procedures policy which includes, but is not limited to, procedures for proper fertilizer application and the planting of native plant materials to lessen the amount of turf area requiring mowing and the application of chemicals. Each Annual Report shall discuss the actions taken to implement this policy with an estimate of fertilizer and turf reduction.
- For waters for which Bacteria is a Stormwater Pollutant of Concern:
 - On Town-owned or -operated lands with a high potential to contribute bacteria:
 Develop, fund, implement, and prioritize a retrofit or source management program.
 - o On Town-owned or -operated lands, prohibit the feeding of geese or waterfowl and implement a program to manage geese and waterfowl populations.

Each Annual Report shall identify problem areas for which a retrofit or source management program were developed, the location of the closest outfall monitored in accordance with Section 6(i) of the MS4 General Permit, the cost of such retrofit or program, and the anticipated pollutant reduction and actions taken to implement a program to manage geese and waterfowl populations.

Measureable Goals: Additional measures implemented by deadline

Schedule: Begin implementing by December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-6: Track projects that disconnect DCIA

Description: An area of DCIA is considered disconnected when the appropriate portion of the Water Quality Volume has been retained in accordance with the requirements of Section (6)(a)(5)(B)(i) or (ii) of the MS4 General Permit. This may be accomplished through retrofits or redevelopment projects (public or private) that utilize Low Impact Development (LID) and runoff reduction measures or any other means by which stormwater is infiltrated into the ground or reused for other purposes without a surface or storm sewer discharge. A redevelopment project, as that term is used here and in Section 6(a)(5)(B)(i) and (ii) of the MS4 General Permit, is one that modifies an existing developed site for the purpose of enhancing, expanding or otherwise modifying its function or purpose. A retrofit project is one that modifies an existing developed site for the primary purpose of disconnecting DCIA. The DCIA calculation performed pursuant to BMP #5-4 and Section 6(a)(5)(C) of the MS4 General Permit shall serve as the baseline for the required retrofit program.

DCIA Disconnection Tracking: track on an annual basis the total acreage of DCIA that is disconnected as a result of redevelopment or retrofit projects within the MS4. Tracking the disconnection of DCIA means documenting within a given redevelopment or retrofit project the amount of existing DCIA that is modified such that it is disconnected. This tracking may include disconnections of DCIA from redevelopment or retrofit projects implemented as early as July 1, 2012 (five (5) years prior to the effective date of the MS4 General Permit). Any redevelopment or retrofit of an existing developed site, whether public (municipal, state or federal) or private (residential, commercial or industrial) shall be included in this tracking. Note: Tracking the disconnection of DCIA does not apply for sites that were previously undeveloped as there were no existing impervious surfaces on those sites.

Measureable Goals: The total amount of DCIA that has been disconnected during a given year Schedule: DCIA Disconnection Tracking shall begin on July 1, 2017 (effective date of MS4 General Permit)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-7: Develop and implement infrastructure repair/rehabilitation program

Description: Rehabilitate MS4 infrastructure in a timely manner to reduce or eliminate the discharge of pollutants from the MS4 to receiving waters. Utilize the information developed pursuant to old BMP #6-4 of the 2004 SWMP and Section (6)(a)(6)(A)(v) of the 2004 MS4 General Permit, implement a program for repairing, retrofitting or upgrading conveyances, structures and outfalls of the MS4. Update program based on new information on outfalls discharging pollutants, impaired waters, inspection observations or observations made during outfall mapping pursuant to BMP #3-4 and Section 6(a)(3)(C) of the MS4 General Permit.

Measureable Goals: Program developed and implemented by deadline (the Annual Report will include the number of hours logged by operational employees repairing, maintaining and upgrading the storm drain system)

Schedule: Begin to develop and implement on July 1, 2017 (effective date of the MS4 General Permit)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #6-8: Develop plan to identify/prioritize retrofit projects

Description: Retrofit Planning: develop a plan to identify and prioritize DCIA disconnection projects. Considerations for prioritizing retrofit projects may include outfall catchment areas that discharge to impaired waters, areas within the Urbanized Area of the MS4, or catchment areas with greater than eleven percent (11%) DCIA. The Town shall select from the list of prioritized projects those that it will implement to meet the goals described below.

Retrofit Schedule: commence the implementation of the projects identified above with a goal of disconnecting one percent (1%) per year of the Town's DCIA for the fourth and fifth years of the MS4 General Permit, or a total of 2%, to the MEP. The two percent (2%) goal may be achieved by compiling the total disconnected DCIA tracked as described above or a combination of the two. If the two percent (2%) goal will not be met, include in the Annual Report a discussion of what percentage of DCIA will actually be disconnected and why the remainder of the two percent (2%) goal could not be achieved based on the MEP standard outlined in Section 5(b) of the MS4 General Permit. In the Annual Report for the third year of the MS4 General Permit (July 1, 2019 – June 30, 2020), provide the identification and prioritization process, the selection of the projects to be implemented, the rationale for the selection of those projects and the total DCIA to be disconnected upon implementation of the projects. Also provide in the Annual Report for the fifth year (July 1, 2021 – June 30, 2022) of MS4 General Permit for continuation of the retrofit program and continue such program with a goal to disconnect one percent (1%) of DCIA in each year thereafter.

Measureable Goal: Plan developed by deadline; 2% DCIA disconnected by deadline

Schedule: Develop a plan to implement retrofit projects on or before June 30, 2020 (end of third year after the effective date of the MS4 General Permit) and disconnect 2% of DCIA by June 30, 2022 (end of the MS4 General Permit term)

Responsible Person/Department: Gary J. Schneider, Director of Public Works

BMP #6-9: Develop/implement street sweeping program

Description: Establish and implement procedures for sweeping Town-owned or –operated streets and parking lots including:

- All streets and parking lots within the Urbanized Area of the MS4, and outside the
 Urbanized Area within the catchment areas of the MS4 with either DCIA of greater than
 11% or which discharge to impaired waters, shall be inspected, swept and/or cleaned
 (as necessary) with a minimum frequency of once per year in the spring following the
 cessation of winter maintenance activities.
- More frequent inspections, cleaning and/or sweeping of targeted areas determined by the Town to have increased pollutant potential based on the presence of active construction activity or other potential pollutant sources.
- Identify such potential pollutant sources based upon surface inspections, catch basin cleaning or inspection results, land use, winter road deicing application, impaired or TMDL waters or other relevant factors as determined by the Town.
- If wet dust suppression is conducted, the use of water should be minimized such that a
 discharge of excess water to surface waters and/or the storm sewer system does not
 occur.
- For streets and parking lots outside the Urbanized Area and outside the catchment
 areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired
 waters, including any rural uncurbed streets and parking lots with no catch basins, either
 meet the minimum frequencies above, or develop and implement an inspection,
 documentation and targeted sweeping and/or cleaning plan within one (1) year of the
 effective date of the general permit, and submit such plan with its year one Annual
 Report.
- For new and redeveloped municipal parking lots, evaluate options for reducing stormwater runoff to surface waters and/or the storm sewer system.
- Ensure the proper disposal of street sweepings. Sweepings shall not be discharged back into the storm drain system and/or surface waters.
- Document results of sweeping program in its Annual Report including, at a minimum:
 - o A summary of inspection results,
 - o Curb miles swept, dates of cleaning,
 - o Volume or mass of material collected, and method(s) of reuse or disposal.
 - Any alternate sweeping plan for rural uncurbed streets and any runoff reduction measures implemented.

Measureable Goals: Roads swept at least twice annually

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-10: Develop/implement catch basin cleaning program

Description: Conduct routine cleaning of all catch basins and track catch basin inspection observations. Utilizing information compiled through its inventory of catch basins, operational staff and public complaints, optimize routine cleaning frequencies for particular structures or catchment areas as follows to maintain acceptable sediment removal efficiencies:

- Inspect all Town-owned catch basins within the Urbanized Area of the MS4 and outside the Urbanized Area within the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters at least once by June 30, 2020 (the end of the third year following the effective date of this general permit). Catch basins outside the Urbanized Area and outside the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters shall be inspected by June 30, 2022 (the end of the fifth year following the effective date of this general permit).
- Prioritize inspection and maintenance for Town-owned catch basins located near impaired waters and construction activities (roadway construction, residential, commercial, or industrial development or redevelopment). Clean catch basins in such areas more frequently if inspection and maintenance activities indicate excessive sediment or debris loadings. (Note: the MS4 General Permit defines excessive sediment or debris loading as a catch basin sump more than fifty (50) percent full. A catch basin sump is more than 50 percent full if the contents within the sump exceed one half the distance between the bottom interior of the catch basin to the invert of the deepest outlet of the catch basin.)
- Establish a schedule that the frequency of routine cleaning will ensure that no catch basin at any time will be more than fifty (50) percent full.
- If a catch basin sump is more than fifty (50) percent full during two consecutive routine
 inspections/cleaning events, the Town shall document that finding, investigate the
 contributing drainage area for sources of excessive sediment loading, and to the
 maximum extent practicable, abate contributing sources within its jurisdiction. Describe
 any actions taken in its Annual Report.
- Document in the SWMP and in the first Annual Report, the plan for optimizing catch basin cleaning, inspection plans, or the schedule for gathering information to develop the optimization plan. Documentation shall include metrics and other information used to reach the determination that the established plan for cleaning and maintenance is optimal for the MS4. The permittee shall keep a log of catch basins cleaned or inspected.
- Include in each Annual Report:
 - o total number of catch basins,
 - o number inspected,
 - o number cleaned.
 - o the total volume or mass of material removed from all catch basins and.
 - o if practicable, the volume or mass of material removed from each catch basin draining to water quality limited waters

Catch basin cleaning records from 2012 to current date will be utilized for comparison purposes to develop a plan for optimizing catch basin cleaning. If a catch basin is determined to have been 50% full or more based on the recorded volume of material removed, it will be scheduled for an additional inspection. If a catch basin sump is more than fifty% full during two consecutive routine inspections/cleaning events, document that finding, investigate the contributing drainage area for sources of excessive sediment loading, and to the maximum extent practicable, abate contributing sources. Describe any actions taken in its Annual Report.

Measureable Goals: 100% of catch basins cleaned within schedule below

Schedule: Inspect and clean as needed all Town-owned catch basins within the Urbanized Area of the MS4 and outside the Urbanized Area within the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters at least once by June

30, 2020 (the end of the third year following the effective date of this general permit). Inspect and clean as needed all catch basins outside the Urbanized Area and outside the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters shall be inspected by June 30, 2022 (the end of the fifth year following the effective date of this general permit)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-11: Develop/implement snow management practices

Description: Implement snow management practices including Deicing Material Management and Snow and Ice Control Practices as described below.

BMP #6-11a: Deicing Material Management

Description: Develop and implement standard operating practices (SOPs) for the use, handling, storage, application, and disposal of deicing products such as salt and sand to minimize exposure to stormwater including:

- Consider:
 - Means to minimize the use and optimize the application of chloride-based or other salts or deicing product (while maintaining public safety)
 - o Opportunities for use of alternative materials;
- For any stationary exterior containers of liquid deicing materials installed after July 1, 2017, provide secondary containment of at least 110% of the largest container or 10% of the total volume of all containers, whichever is larger, without overflow from the containment area.

Measureable Goals: SOPs for the use, handling, storage, application, and disposal of deicing products developed and implemented by deadline

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #6-11b: Snow and Ice Control Practices

Description: Implement standard operating practices regarding snow and ice control to minimize the discharge of anti-icing or de-icing chemicals and other pollutants (while maintaining public safety):

- Establish goals for the optimization of chemical application rates through the use, where practicable, of automated application equipment, anti-icing and pre-wetting techniques, and alternate chemicals.
- Maintain records of the application of anti-icing and/or de-icing chemicals.
- Ensure the proper training for deicing applications for municipal employees or private contractors on lands and easements for which the department is responsible for maintenance.
- Manage and dispose of snow accumulations in accordance with DEEP's Best Management Practices for Disposal of Snow Accumulations from Roadways and Parking Lots, revised 2/4/11 and as amended.
- Document results of snow removal program in the Annual Report including, at a minimum:
 - the type of staff training conducted on application methods and equipment,

- type(s) of deicing materials used;
- o lane-miles treated;
- o total amount of each deicing material used;
- o type(s) of deicing equipment used;
- o any changes in deicing practices (and the reasons for the change); and
- o snow disposal methods.

Measureable Goals: 1) SOPs implemented, 2) Percent of operational staff trained on application methods and equipment; and 3) goals for chemical application rates met annually

Schedule: By December 31, 2017 (prior to the development of the 1st Annual Report which is required to be available for public review and comment by January 31, 2018)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

Section 7

Monitoring Requirements

Comply with the screening and monitoring requirements of Section 6(i) of the MS4 General Permit and conduct Impaired Waters Outfall Investigation and Monitoring. Beginning the second year of the permit (2018), the Annual Report shall report on the progress of the impaired waters investigation and monitoring program. The Annual Report shall also include a listing of the outfalls screened during the year, the number of outfalls identified for follow-up investigation, the progress of drainage area investigations, a description of the control measure implementation for the different impairments, identification of the six outfalls to be monitored and the results of the prioritized outfall monitoring.

BMP #7-1: Screen all Outfalls that Discharge to Impaired Waters:

Description: Utilizing the list and mapping of all outfalls that discharge to impaired waters prepared pursuant to BMPs #3-2 and #7-2, and Section 6(a)(3)(C) of the MS4 General Permit, screen these outfalls for the pollutant identified as the pollutant of concern for the impairment as follows:

- Outfall Screening for Phosphorus and Nitrogen: Screen outfalls from the MS4 identified in Section 6(a)(3)(C) that discharge to impaired waters for which phosphorus or nitrogen is the pollutant of concern. A sample may be taken at the outfall during any rain event that results in a discharge from the outfall in accordance with the monitoring protocols described below. This screening shall be conducted for all such outfalls once during the term of the MS4 General Permit in accordance with the following:
 - Nitrogen Screening: A portable nitrogen meter may be used to take a field reading during the wet weather discharge. If the nitrogen reading exceeds the following threshold, the outfall shall be identified for follow-up investigation. Total Nitrogen > 2.5 mg/l
 - Phosphorus Screening: A portable phosphorus meter may be used to take a field reading during the wet weather discharge. If the phosphorus reading exceeds the following threshold, the outfall shall be identified for follow-up investigation. Total Phosphorus > 0.3 mg/l
- Outfall Screening for Bacteria: Screen outfalls from the MS4 that discharge to impaired
 waters for which bacteria is the pollutant of concern. A sample may be taken at the
 outfall during any rain event that results in a discharge from the outfall in accordance
 with the monitoring protocols described below. The sample shall be analyzed for the
 following:
 - E. coli and Total Coliform (col/100ml) (for discharges to Class AA, A and B surface waters)
 - Fecal coliform and Enterococci (col/100ml) (for discharges to Class SA and SB surface waters)
 - The outfall shall be identified for follow-up investigation as described below if any of the following conditions apply:
 - E. coli >235 col/100ml for swimming areas and >410 col/100ml for all others, or
 - Total Coliform >500 col/100ml,
 - Fecal coliform >31 col/100ml for Class SA and >260 col/100ml for Class SB, or

- Enterococci >104 col/100ml for swimming areas and >500 col/100ml for all others.
- o If it can be documented that bacteria levels at an outfall that exceed these levels are solely the result of natural sources of bacteria, they are not required to conduct a follow-up investigation for that outfall. Natural sources may include wildlife or runoff from undeveloped wooded areas but do not include pet waste or waterfowl congregating at parks, ponds or other attractive nuisance areas.
- Outfall Screening for Other Pollutants of Concern: Screen outfalls from the MS4 identified in Section 6(a)(3)(C) that discharge to impaired waters for which pollutants other than phosphorus, nitrogen or bacteria are listed as the pollutant of concern. Take a sample at the outfall and in-stream immediately upstream or otherwise outside the influence of the outfall. The sample may be taken during any rain event that results in a discharge from the outfall in accordance with the monitoring protocols described below. These samples shall be analyzed for turbidity. A field turbidity meter may be used for these analyses. If the outfall sample is more than 5 NTU greater than the in-stream sample, the outfall shall be identified for follow-up investigation.

Adhere to the following Stormwater Monitoring Procedures from Section 6(i)(2) of the MS4 General Permit:

- Wet Weather Outfall Monitoring: Samples shall be collected from discharges resulting from any rain storm that produces a discharge from the outfall(s) being monitored and that occurs at least 48 hours after any previous rain storm that produced a discharge from the outfall. Runoff events resulting from snow or ice melt alone cannot be used to meet these monitoring requirements. However, monitoring may be conducted during a rain event that may include insignificant amounts of snow or ice melt. Monitoring shall consist of a single grab sample taken within the first six (6) hours of discharge from the outfall.
- Rain Event Information: The following information shall be collected for the rain events during which monitoring is conducted:
 - o The date, temperature, time of the start of the discharge, time of sampling, and magnitude (in inches) of the rain event sampled.
 - The duration between the rain event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) rain event.
- Test Procedures: Unless otherwise specified in the MS4 General Permit, all pollutant parameters shall be tested according to methods prescribed in Title 40, CFR, Part 136 (1990). Laboratory analyses must be consistent with Connecticut Reasonable Confidence Protocols.

Wet weather sampling data may be used for an outfall pursuant to sampling conducted under the 2004 MS4 General Permit or other appropriate wet weather sampling, and it will not be required to screen that outfall under this general permit.

Measureable Goals: 50% of outfalls screened by deadline, 100% of outfalls screened by end of permit

Schedule: Begin outfall screening by June 30, 2018 (within one year of the effective date of the MS4 General Permit). Screen at least fifty percent (50%) of these outfalls no later than June 30,

2020 (the end of the third year following the effective date of the MS4 General Permit). All such outfalls shall be screened by June 30, 2022 (end of the term of the MS4 General Permit).

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #7-2: Inventory and mapping of discharges to impaired waters:

Description: MS4s that discharge into impaired waters, as identified in Section 6(k) of the MS4 General Permit, must create an inventory of all outfalls that discharge to impaired waters utilizing the list and mapping prepared pursuant to BMP #3-2 and Section 6(a)(3)(C) of the MS4 General Permit.

Measureable Goals: Inventory and mapping completed by deadline

Schedule: No later than June 30, 2019 (two years following the effective date of the MS4 General Permit)

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #7-3: Follow-up Investigations of drainage areas:

Description: Investigate activities within the drainage area contributing to each outfall identified for follow-up investigation under BMP #7-1. This investigation shall include factors potentially associated with the cause of the related impairment. Such factors may include: land use or development patterns; business or commercial activities; industrial activities; DCIA; natural contributors; potential MS4 maintenance issues; residential activities; and any other activities identified by the Town as potentially contributing to the related impairment.

In each outfall drainage area identified for follow-up investigation under BMP #7-1, implement a BMP program focusing on the impaired waters provisions of each of the Control Measures in Section 6(a) of the MS4 General Permit and on the findings of the drainage area investigation.

Measureable Goals: Follow-up investigations commenced by deadline; % of areas identified for follow-up investigation that have had a BMP implemented

Schedule: Commence follow-up investigations no later than June 30, 2019 (two years following the effective date of the MS4 General Permit). Begin to implement control measures no later than June 30, 2020 (three years following the effective date of the MS4 General Permit).

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

BMP #7-4: Annual monitoring of priority outfalls:

Description: Once outfall screening has been completed for at least half of the outfalls identified pursuant to BMP #7-2 and Section 6(i)(1) of the MS4 General Permit, utilize the screening results to select six (6) of the highest contributors of any of the pollutants of concern. These six outfalls shall be sampled annually for the appropriate pollutant of concern. If more than one pollutant of concern is identified for any monitored outfall (i.e. more than one impairment), all of these pollutants shall be monitored.

Measureable Goals: Six outfalls identified and monitored by deadline.

Schedule: Commence annual monitoring of the six outfalls no later than July 1, 2020 (beginning of the fourth year following the effective date of the MS4 General Permit).

Responsible Persons/Departments: Gary J. Schneider, Director of Public Works

Section 8

Water Quality Protection for Receiving Waters

One of the goals of the SWMP is to protect water quality in the MS4's receiving waters. This section lists the receiving waters in Groton and addresses the MS4 General Permit requirements for discharges to impaired waters or water bodies subject to a pollutant load reduction within a TMDL and discharges to high quality waters.

8.1 Receiving Waters

The receiving waters of the Town's MS4 discharges are described in Table 2 below and identified on Figure 1.

Table 2: Town of Groton MS4 Receiving Waters:

Receiving Waters	Watershed ID (freshwater) or 305b ID (estuary)	Water Quality Classification	Sub-Basin Name
Hempstead Brook/Latham Lake	2107-05-1	AA	Great Brook
Lamb's Pond	2107-06-1	AA	Great Brook
Great Brook	2107-00-1-L3	AA	Great Brook
Groton Reservoir	2107-00-1-L6	AA	Great Brook
Culver Brook Watershed	2107-02-1-L1	AA	Great Brook
West Branch	2105-03-1	Α	Haley's Brook
Haley's Brook	2105-00-2	Α	Haley's Brook
Red Brook Watershed	2105-02-2-R1	Α	Haley's Brook
Bindloss Brook	2106-01-1	Α	Mystic River
Fishtown Brook	2106-02-1	Α	Mystic River
Mystic River	CT-E1_007	SB	Mystic River
Eccleston Brook	2000-18-1	Α	Southeast Shoreline
Cowslip Brook	2000-18-2-R1	Α	Southeast Shoreline
Fishtown Brook	2000-19-1	Α	Southeast Shoreline
Ramble Brook	2000-19-1	Α	Southeast Shoreline
Fort Hill Brook	2000-22-1	Α	Southeast Shoreline
Birch Plain Creek Watershed	2000-26-1	Α	Southeast Shoreline
Birch Plain Creek	2000-27-1-L1	Α	Southeast Shoreline
Trails Pond	2000-27-1-L1	Α	Southeast Shoreline
Baker Cove Watershed	2000-28-1	SA	Southeast Shoreline
Mystic Harbor	CT-E1_008	SB	Southeast Shoreline
Beebe Cove	CT-E1_009	SA	Southeast Shoreline
Palmer Cove	CT-E1_010	SA	Southeast Shoreline
Mumford Cove	CT-E1_011	SB	Southeast Shoreline
Poquonnock River	CT-E1_012	SA	Southeast Shoreline
West Cove	CT-E2_006	SA	Southeast Shoreline
Outer Mumford Cove	CT-E2_007	SA	Southeast Shoreline
Thames River	CT-E1_015	SB	Thames River

8.2 Discharges to Impaired Waters or Waterbodies subject to a Pollutant Load Reduction within a TMDL

Section 3(b)(7) and Section 6(k) of the MS4 General Permit require meeting the identified criteria of the MS4 General Permit for discharges to impaired waters (with or without a TMDL), waters for which nitrogen, phosphorus, bacteria or mercury are stormwater pollutants of concern, or waters which have pollution load reductions specified within a TMDL.

The waterbodies with an established TMDL that the Town's MS4 discharges into are described in Table 3 and the impaired waterbodies the Town's MS4 discharges into are described in Table 4.

Table 3: MS4 Discharges to Waterbodies with Established TMDLs

TMDL	Pollutant	Waterbody Name
CT Statewide Bacteria TMDL	Bacteria	Poquonnock River (mouth), Mumford Cove, Outer Mumford Cove, Palmer Cove, West Cove, & Beebe Cove
A TMDL Analysis to Achieve Water Quality Standards for Dissolved Oxygen in Long Island Sound	Nitrogen	Long Island Sound and contributing watersheds
Northeast Regional Mercury TMDL	Mercury	All Connecticut inland waters

Table 4: MS4 Discharges to Impaired Waterbodies

Waterbody Name	305b ID	Impairment(s)	TMDL	Description
Thames River (Middle)	CT- E1_015	fecal coliform, dissolved oxygen saturation, Estuarine Bioassessments, Dissolved oxygen	None Established	Thames River from I-95 crossing to just below outlet of Poquetanuck Cove (near Walden Island), and adjacent to Route 12 at Cardinal Lane intersection in Ledyard
Poquonnock River (Mouth)	CT- E1_012	fecal coliform	CT Statewide Bacteria TMDL Estuary 11: New London/Groton	Poquonnock River from mouth of Baker Cove to salt water limit just north of railroad crossing
Mumford Cove	CT- E1_011	fecal coliform	CT Statewide Bacteria TMDL Estuary 11: New London/Groton	Eastern portion of LIS, Inner Estuary, Inner Mumford Cove along east side of Bluff Point State Park shore and north of Groton Long Point to salt water limit near railroad crossing
Outer Mumford Cove	CT- E2_007	fecal coliform	CT Statewide Bacteria TMDL Estuary 11: New London/Groton	Eastern portion of LIS from Mumford Point to eastern most tip of Groton Long Point
Palmer Cove	CT- E1_010	fecal coliform	CT Statewide Bacteria TMDL Estuary 11: New London/Groton	North side of Groton Long Point Road past railroad crossings to salt water limit
West Cove	CT- E2_006	fecal coliform	CT Statewide Bacteria TMDL Estuary 11: New London/Groton	Eastern portion of LIS from tip of GLP to Morgan Point at SB/SA water quality boundary for Mystic River mouth (out approximately 1,000 ft offshore)
Beebe Cove	CT- E1_009	fecal coliform	CT Statewide Bacteria TMDL Estuary 11: New London/Groton	Eastern portion of LIS, (Mystic Harbor) waters west of two railroad crossings along shore

8.3 Discharges to High Quality Waters

Section 3(b)(6) of the MS4 General Permit requires the Town to meet the identified criteria of the MS4 General Permit for discharges to high quality waters. The Connecticut Water Quality Standards defines high quality waters as surface waters where the water quality is better than necessary to meet the minimum criteria established in the Connecticut Water Quality Standards for the applicable classification and related designated uses pursuant to Section 22a-426-1(36) of the Regulations of Connecticut State Agencies.

As of publication of the SWMP, DEEP had not developed an official list of high quality waters for the State. Once DEEP has developed an official list, high quality waters that the Town of Groton MS4 discharges into will be described here.

Section 9

SWMP Certification

Certification to be signed by chief elected officer or principal executive officer of the municipality:

"I have personally examined and am familiar with the information submitted in this document and all attachments thereto, and I certify that, based on reasonable investigation, including my inquiry of those individuals responsible for obtaining the information, the submitted information is true, accurate and complete to the best of my knowledge and belief. I understand that a false statement made in this document or its attachments may be punishable as a criminal offense, in accordance with Section 22a-6 of the Connecticut General Statutes, pursuant to Section 53a-157b of the Connecticut General Statutes, and in accordance with any other applicable statute."

Signature of Registrant/Authorized Representative

Gary J. Schneider Director of Public Works

Date: March 30, 2017

Signature of Preparer (if different than above)

Kristin Doundoulakis

Project Management Specialist

Date: March 30, 2017

Qualified Professional Certification:

"I hereby certify that I am a qualified professional engineer, as defined in the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems. I am making this certification in connection with a registration under such general permit, submitted to the Commissioner by the Town of Groton for an activity located at or within the Town of Groton. I have personally examined and am familiar with the information that provides the basis for this certification, including but not limited to all information described in Section 3(b)(9)(A) of such general permit, and I certify, based on reasonable investigation, including my inquiry of those individuals responsible for obtaining such information, that the information upon which this certification is based is true, accurate and complete to the best of my knowledge and belief. I certify, based on my review of all information described in Section 3(b)(9)(A) of such general permit and on the standard of care for such projects, that I have made an affirmative determination in accordance with Section 3(b)(9)(B) of this general permit. I understand that this certification is part of a registration submitted in accordance with Section 22a-430b of Connecticut General Statutes and is subject to the requirements and responsibilities for a qualified professional in such statute. I also understand that knowingly making any false statement in this certification may be punishable as a criminal offense, including the possibility of fine and imprisonment, under section 53a-157b of the Connecticut General Statutes and any other applicable law."

Nothing in this subsection shall be construed to authorize or require a qualified professional engineer to engage in any profession or occupation requiring a license under any other provision of the Connecticut General Statutes without such license.

Signature of Qualified Professional

CT PE 16710 P.E. License Number


Greg Hanover, P.E. Supervisor of Technical Services

Date

Seal:

Figures

Figure 1: MS4 Jurisdictions –
Town of Groton and Interconnected MS4s

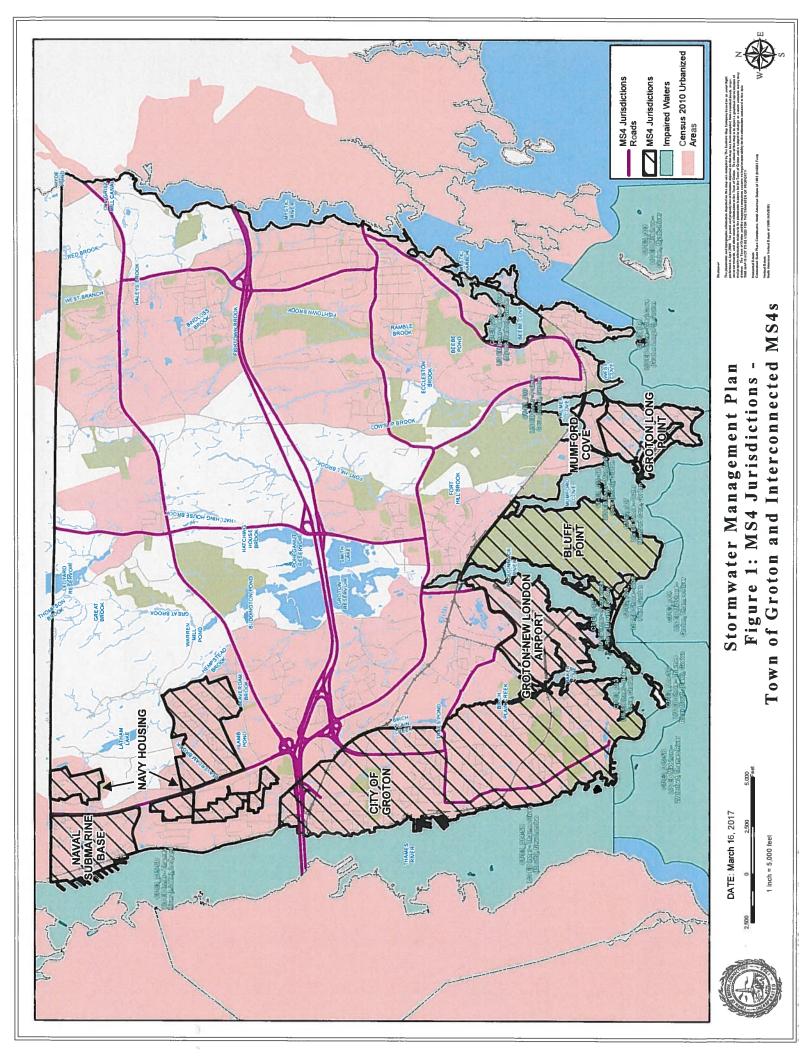

Appendix A

Table 5: Summary of BMPs by Minimum Control Measure

Table 5: Summary of BMPs by Minimum Control Measure

	Minimum Control Mea	m Control Measure 1: Public Education & Outreach	tion & Outreach	
BMP#	Task Description	Responsible Person/Dept.	Measurable Goal	Schedule
1-1	Implement Public Education Program	Gary J. Schneider/PWD	Post educational information on social media annually	6/30/2018
1-2	Address education/outreach for pollutants of concern	Gary J. Schneider/PWD	One post to social media addressing Stormwater Pollutants of Concern	6/30/2018
1-3	Stormwater information provided on local cable access	Gary J. Schneider/PWD	Program on local cable access channel aired annually	6/30/2018
1-4	Stormwater information provided on the Town's website	Gary J. Schneider/PWD	Update Stormwater webpage annually	6/30/2018
1-5	Educate dog owners about picking up pet waste	Gary J. Schneider/PWD	Pet waste fact sheets distributed to licensed dog owners with annual dog license	6/30/2018
1-6	Install and maintain no dumping signs at coastal access areas	Gary J. Schneider/PWD	Annually inspect all signs and repair them as necessary	6/30/2018

	Minimum Control Measu	Control Measure 2: Public Involvement/Participation	nent/Participation	
BMP#	BMP # Task Description	Responsible Person/Dept. Measurable Goal	Measurable Goal	Schedule
2-1	2-1 Comply with public notice requirements for the SWMP and Annual Reports	Gary J. Schneider/PWD	All required notices posted by deadline	1/31/2018
2-2	2-2 Stormwater Committee Meetings	Gary J. Schneider/PWD	One meeting held annually	6/30/2018
2-3	2-3 Sponsor community participation event	Gary J. Schneider/PWD	One event held annually	6/30/2018

	Minimum Control Measure 3: Illicit Discharge Detection & Elimination	: Illicit Discharge De	tection & Elimination	
BMP#	Task Description	Responsible Person/Dept.	Measurable Goal	Schedule
3-1	Develop a written IDDE Program	Gary J. Schneider/PWD	Written IDDE Program developed by schedule deadline	6/30/2018
3-2	Develop list and maps of all MS4 stormwater outfalls in urbanized and priority areas	Gary J. Schneider/PWD	Outfall and Interconnections inventory and map completed by deadline	6/30/2019
3-3	Develop a program for citizen reporting of illicit discharges	Gary J. Schneider/PWD	Formal written program developed by deadline	6/30/2018
3-4	Establish legal authority to prohibit and remove illicit discharges	Gary J. Schneider/PWD	Ordinance passed by Town Council by deadline	6/30/2018
3-2	Develop record keeping system for IDDE tracking	Gary J. Schneider/PWD	IDDE tracking spreadsheet developed by deadline	6/30/2018
3-6	Address IDDE in areas with pollutants of concern	Gary J. Schneider/PWD	Areas with failing septic systems identified by the deadline; % of failing systems addressed annually	6/30/2018

Page A-1

Table 5: Summary of BMPs by Minimum Control Measure (Continued)

	Minimum Control Measure 4:		Construction Site Runoff Control	
BMP#	Task Description	Responsible Person/Dept.	Measurable Goal	Schedule
4-1a	Implement and enforce Town land use regulations or other legal authority to meet requirements of MS4 General Permit	Jonathan Reiner/OPDS	Existing regulations reviewed and revised as necessary by deadline	6/30/2019
4-1b	Establish interagency or inter-jurisdictional agreements	Gary J. Schneider/PWD	Interagency or inter-jurisdictional agreements established	6/30/2019
4-2	Outline interdepartmental coordination in site plan review & approval	Jonathan Reiner/OPDS	Site plan review and approval outlined	7/1/2017
4-3	Review site plans for stormwater quality concerns	Jonathan Reiner/OPDS	100% of site plans received are reviewed prior to approval for E&S control to prevent or minimize impacts to water quality	7/1/2017
4-4	Conduct Site Inspections	Jonathan Reiner/OPDS	Formal inspection checklist reviewed and revised as necessary by deadline, 100% of site inspections conducted for all site plans received within reporting period, and percent of enforcement actions taken upon discovery of deficiency	6/30/2019
4-5	Consideration of public input	Jonathan Reiner/OPDS	Public meetings held by Planning, Zoning and Inland Wetlands Agency for 100% of eligible projects; 100% of projects posted on Town website when not presented at a meeting	7/1/2017
4-6	Notify construction site operators of the requirements for registration under "General Permit for the Discharge of Stormwater and Dewatering Wastewaters Associated with Construction Activities"	Jonathan Reiner/OPDS	Flyers provided in 100% of preconstruction meetings and land use application reviews	7/1/2017
4-7	Document compliance with the Connecticut Anti-Degradation Implementation Policy in the Water Quality Standards for all new or increased discharges to High Quality Waters from the MS4	Jonathan Reiner/OPDS	100% compliance with CT Anti-Degradation Implementation policy for all new or increased discharges to high quality waters	7/1/2017
8-4	Demonstrate no new or increased discharges to Impaired Waters from the MS4	Jonathan Reiner/OPDS	Zero net increases in loading of pollutant(s) of concern to discharges from MS4 to Impaired Waters	7/1/2017
4-9	Retain Water Quality Volume for all new stormwater discharges located less than 500 feet from a tidal wetland	Jonathan Reiner/OPDS	100% Water Quality Volume retained for all new stormwater discharges located less than 500 feet from a tidal wetland that is not a fresh-tidal wetland	7/1/2017
4-10	Obtain required permits for stormwater discharges below the coastal jurisdiction line	Jonathan Reiner/OPDS	100% of all required permits obtained for all new stormwater discharges below the coastal jurisdiction line	7/1/2017

Table 5: Summary of BMPs by Minimum Control Measure (Continued)

	Minimum Control Measure 5: Post Construction Sto	rmwater Managem	Construction Stormwater Management in New Development & Re-development	
BMP#	Task Description	Responsible Person/Dept.	Measurable Goal	Schedule
5-1	Establish legal authority and guidelines regarding low impact development (LID) and runoff reduction in site development planning	Jonathan Reiner/OPDS	By deadline: 1) Legal authority established for LID and runoff reduction practices; 2) Identification and, where appropriate, reduction or elimination of existing local regulatory barriers to implementing LID and runoff practices; and 3) Consideration of the watershed protection elements to manage the impacts of stormwater on receiving waters implemented	6/30/2021
5-2	Enforce LID/runoff reduction requirements for development and redevelopment projects	Jonathan Reiner/OPDS	Percent of LID projects required by Town for approval of those received within the reporting period	6/30/2019
5-3	Implement long-term maintenance plan for stormwater basins and treatment structures	Gary J. Schneider/PWD	Inspect 100% of Town-owned stormwater basins and treatment structures annually	6/30/2019
5-4	DCIA mapping	Gary J. Schneider/PWD	Percent of total outfalls that DCIA has been mapped and calculated for	6/30/2020
2-5	Address post-construction issues in areas with pollutants of concern	Gary J. Schneider/PWD	Plan developed within 12 months of identification. 100 % of identified problems corrected within required timeframe	6/30/2019
9-5	Implement and maintain any control measures or conditions for New Discharge to an Impaired Water without an Established TMDL	Jonathan Reiner/OPDS	100% of control measures or conditions implemented and maintained	7/1/2017
5-7	Additional requirements for all new and existing discharges to a water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL	Jonathan Reiner/OPDS	100% of the discharge requirements consistent with the applicable Wasteload Allocations, Load Allocations or Water Quality Targets for that TMDL followed for new authorized discharges to a water with a TMDL or with a pollutant load reduction established within the TMDL; BMPs implemented as necessary for all existing discharges to a Water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL	7/1/2017

	Minimum Control Measure 6: Pollution P	revention/Good Ho	e 6: Pollution Prevention/Good Housekeeping in Municipal Operations	
BMP#	BMP # Task Description	Responsible Person/Dept. Measurable Goal	Measurable Goal	Schedule
6-1	Continue the formal employee training program developed under the 2004 MS4 General Permit	Gary J. Schneider/PWD	100% of required operational employees trained annually	12/31/2017
6-2	6-2 Implement MS4 property and operations maintenance	See Sub-division	See Sub-division	12/31/2017
6-2a	Minimize the discharge of pollutants to MS4 from parks and open space management	Gary J. Schneider/PWD	100% of existing SOP's reviewed and updated by deadline	12/31/2017

Table 5: Summary of BMPs by Minimum Control Measure (Continued)

	Minimum Control Measure 6: Pollution F	revention/Good Ho	Pollution Prevention/Good Housekeeping in Municipal Operations	
BMP#	Task Description	Responsible Person/Dept.	Measurable Goal	Schedule
6-2b	Minimize the discharge of pollutants to MS4 from pet waste management	Gary J. Schneider/PWD	1) Locations with inappropriate pet waste management identified by deadline; and 2) % of locations where compliance activities are complete	12/31/2017
6-2c	Minimize the discharge of pollutants to MS4 from waterfowl management	Gary J. Schneider/PWD	1) Lands where waterfowl congregate and feed identified within schedule; 2) % of identified lands that have signs installed or other targeted techniques to educate public and discourage feeding; 3) % of identified lands that have practices implemented to prevent congregation and/or areas of direct drainage isolated	12/31/2017
6-2d	Minimize the discharge of pollutants to MS4 from municipal buildings and facilities	Gary J. Schneider/PWD	1) Procedures developed and implemented for dumpsters by deadline; 2) Parking lots swept annually; 3) Non-SWPPP facilities evaluated by deadline to ensure no interior floor drains connect to the MS4.	12/31/2017
6-2e	Minimize the discharge of pollutants to MS4 from municipal vehicle and equipment maintenance	Gary J. Schneider/PWD	By deadline: 1) Procedures established for Town vehicle storage; 2) Fueling areas evaluated; and 3)Procedures established to ensure that vehicle wash waters are not discharged to the MS4 or to surface waters	12/31/2017
6-2f	Minimize the discharge of pollutants to MS4 from leaf management	Gary J. Schneider/PWD	Problem streets swept annually in the fall as part of BMP #6-9; Educational information provided on Town Stormwater webpage (BMP #1-4)	12/31/2017
6-3	Implement coordination with interconnected MS4s	Gary J. Schneider/PWD	Interconnected MS4 coordination implemented within deadline	6/30/2019
6-4	Develop and implement a program to control other sources of pollutants to the MS4	Gary J. Schneider/PWD	Program developed and implemented to control the contribution of pollutants to MS4 by deadline	12/31/2017
6-5	Additional measures for discharges to impaired waters	Gary J. Schneider/PWD	Additional measures implemented by deadline	12/31/2017
9-9	Track projects that disconnect DCIA	Gary J. Schneider/PWD	The total amount of DCIA that has been disconnected during a given year	7/1/2017
2-9	Develop and implement infrastructure repair/rehabilitation program	Gary J. Schneider/PWD	Program developed and implemented by deadline	7/1/2017
8-9	Develop plan to identify/prioritize retrofit projects	Gary J. Schneider/PWD	Plan developed by deadline; 2% DCIA disconnected by deadline	6/30/2020
6-9	Develop/implement street sweeping program	Gary J. Schneider/PWD	100% of Roads swept at least twice annually	12/31/2017
6-10	Develop/implement catch basin cleaning program	Gary J. Schneider/PWD	100% of catch basins cleaned within schedule	6/30/2020

Town of Groton SWMP 4/1/17

Page A-4

Table 5: Summary of BMPs by Minimum Control Measure (Continued)

	Minimum Control Measure 6: Pollution F	revention/Good Ho	e 6: Pollution Prevention/Good Housekeeping in Municipal Operations	
BMP#	BMP # Task Description	Responsible Person/Dept. Measurable Goal	Measurable Goal	Schedule
6-11	6-11 Develop/implement snow management practices	See Sub-division	See Sub-division	12/31/2017
6-11a	Deicing Material Management	Gary J. Schneider/PWD	SOPs for the use, handling, storage, application, and disposal of deicing products developed and implemented by deadline	12/31/2017
6-11b	6-11b Develop/implement snow management practices	Gary J. Schneider/PWD	 SOPs implemented, 2) Percent of operational staff trained on application methods and equipment; and 3) Goals for chemical application rates met annually 	12/31/2017

	Monitoring Requirements: Impa	ired Waters Outfall	rements: Impaired Waters Outfall Investigation & Monitoring	
BMP#	Task Description	Responsible Person/Dept.	Measurable Goal	Schedule
	Screen all Outfalls that Discharge to Impaired Waters: Begin Screening	Gary J. Schneider/PWD	50% of outfalls screened by deadline, 100% of outfalls screened by end of permit	6/30/2018
7-1	Screen all Outfalls that Discharge to Impaired Waters: Screen 50% of outfalls that discharge to impaired waters	Gary J. Schneider/PWD	50% of outfalls screened by deadline	6/30/2020
	Screen all Outfalls that Discharge to Impaired Waters: Screen 100% of outfalls that discharge to impaired waters	Gary J. Schneider/PWD	100% of outfalls screened by end of permit	6/30/2022
7-2	Inventory and mapping of discharges to impaired waters	Gary J. Schneider/PWD	Inventory and mapping completed by deadline	6/30/2019
	Follow-up Investigations of drainage areas: commence follow-up investigations	Gary J. Schneider/PWD	Follow-up investigations commenced by deadline	6/30/2019
7-3	Follow-up Investigations of drainage areas: implement control measures	Gary J. Schneider/PWD	% of areas identified for follow-up investigation that have had a BMP implemented	6/30/2020
7-4	Annual monitoring of priority outfalls	Gary J. Schneider/PWD	Six outfalls identified and monitored by deadline	7/1/2020

Appendix B

General Permit for the discharge of Stormwater from Small Municipal Separate Storm Sewer Systems



Connecticut Department of Energy & Environmental Protection

Bureau of Materials Management & Compliance Assurance Water Permitting & Enforcement Division



General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems

SABASBOIL

Issued: January 20, 2016

Effective: July 1, 2017

Expires: June 30, 2022

General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems

Table of Contents

Section 1.	Authority4			
Section 2.	Definitions			
Section 3.	Authorization Under This General Permit			
	(a)	Eligible Activities	8	
	(b)	Requirements for Authorization		
	(c)	Registration		
	(d)	Geographic Area	12	
	(e)	Effective Date and Expiration Date of this General Permit		
	Ø	Effective Date of Authorization		
Section 4.	Reg	ristration Requirements	12	
	(a)	Who Must File a Registration	12	
	<i>(b)</i>	Scope of Registration		
	(c)	Contents of Registration		
	(d)	Availability of Registrations, Stormwater Management Plan, and	15	
	(e)	Annual Reports		
	(e) (f)	Where to File a RegistrationAdditional Information		
	(g) (h)	Additional NotificationAction by Commissioner		
Section 5.	Requirements of this General Permit			
	(a)	Conditions Applicable for Certain Discharges	17	
	<i>(b)</i>	Stormwater Management Plan		
Section 6.	Development of Stormwater Management Plan (Plan)			
	(a)	Minimum Control Measures	19	
	(b)	Sharing Responsibility		
	(c)	Proper Operation and Maintenance	40	
	(d)	Signature Requirements	40	
	(e)	Plan Review Fee		
	(f)	Keeping Plans Current	40	
	(g)	Failure to Prepare or Amend Plan	41	
	(h)	Plan Review Certification	41	
	(i)	Monitoring Requirements		
	<i>(j)</i>	Reporting & Record Keeping Requirements		

	(k)	Discharges to Impaired Waters or Water bodies subject to a Pollutant Load Reduction within a TMDL	47		
Section 7.	Additional Requirements of this General Permit				
	(a)	Regulations of Connecticut State Agencies Incorporated into this General Permit	48		
	(b)	Reliance on Registration	48		
	(c)	Duty to Correct and Report Violations			
	(d)	Duty to Provide Information			
	(e)	Certification of Documents			
	(f)	Date of Filing			
	(g)	False Statements			
	(h)	Correction of Inaccuracies	49		
	(i)	Other Applicable Law			
	<i>(j)</i>	Other Rights			
Section 8.	Commissioner's Powers50				
	(a)	Abatement of Violations	50		
	(b)	General Permit Revocation, Suspension, or Modification			
	(c)	Filing of an Individual Application			
Appendix A	Small MS4 Municipalities				
Appendix B	Illicit Discharge Detection and Elimination (IDDE) Program Protocol				
Appendix C	Aquifer Protection Areas and Other Groundwater Drinking Supply Areas Guidance				
Appendix D	Impaired Waters Guidance				

Section 1. Authority

This general permit is issued under the authority of Section 22a-430b of the Connecticut General Statutes.

Section 2. Definitions

The definitions of terms used in this general permit shall be the same as the definitions contained in Sections 22a-423 of the Connecticut General Statutes and Section 22a-430-3(a) of the Regulations of Connecticut State Agencies. As used in this general permit, the following definitions shall apply:

"x-year, 24-hour rainfall event" means the maximum 24-hour precipitation event with a probable recurrence interval of once in the given number of years (i.e. x=2, 25 or 100), as defined by the National Weather Service in Technical Paper Number 40, "Rainfall Frequency Atlas of the United States," May 1961, and subsequent amendments, or equivalent regional or state rainfall probability information developed therefrom.

"Aquifer protection area" means aquifer protection area as defined in section 22a-354h of the Connecticut General Statutes.

"Best engineering practices" means the design of engineered control measures to control pollution to the maximum extent achievable using measures that are technologically available and economically practicable.

"Best Management Practices (BMP)" means schedules of activities, practices (and prohibitions of practices), structures, vegetation, maintenance procedures, and other management practices to prevent or reduce the discharge of pollutants to waters of the state consistent with state, federal or other equivalent and technically supported guidance. BMPs also include treatment requirements, operating procedures, and practices to control site runoff, spillage or leaks, sludge or waste disposal, or drainage from material storage.

"Catchment area" means the land area from which stormwater runoff is collected by a permittee's MS4 and discharges through a single outfall to surface water.

"Coastal Jurisdiction Line" means the location of the topographical elevation of the highest predicted tide as defined in Section 22a-359(c) of the Connecticut General Statutes.

"Coastal waters" means coastal waters as defined in Section 22a-93(5) of the Connecticut General Statutes.

"Commissioner" means Commissioner as defined in section 22a-423 of the Connecticut General Statutes.

"Control Measures" means any BMPs or other methods (including effluent limitations) used to prevent or reduce the discharge of pollutants to waters of the state.

"Department" means the Department of Energy & Environmental Protection.

"Directly Connected Impervious Area (DCIA)" means that impervious area from which stormwater runoff discharges directly to waters of the state or directly to a storm sewer system that discharges to waters of the state. Impervious areas that discharge through a system designed to retain the

appropriate portion of the Water Quality Volume (pursuant to Section 6(a)(5)(b)(i) or (ii) of this general permit) are not considered DCIA.

"Fresh-tidal wetland" means a tidal wetland located outside of coastal waters.

"Grab sample" means an individual sample collected in less than fifteen minutes.

"Guidelines" means the 2002 Connecticut Guidelines for Soil Erosion and Sediment Control, as amended, established pursuant to Section 22a-328 of the Connecticut General Statutes.

"High Quality Waters" means those waters defined as high quality waters in the Connecticut Water Quality Standards pursuant to Section 22a-426-1(36) of the Regulations of Connecticut State Agencies.

"Illicit Discharge" means any unpermitted discharge to waters of the state that does not consist entirely of stormwater or uncontaminated ground water except those discharges identified in Section 3(a)(2) of this general permit when such non-stormwater discharges are not significant contributors of pollution to a discharge from an identified MS4.

"Impaired water(s)" means those surface waters of the state designated by the Commissioner as impaired pursuant to Section 303(d) of the federal Clean Water Act and as identified in the most recent State of Connecticut Integrated Water Quality Report within Categories 4 or 5, including any subdivisions of these categories.

"Individual permit" means a permit issued to a named permittee under Section 22a-430 of the Connecticut General Statutes.

"Inland wetland" means wetlands as that term is defined in Section 22a-38 of the Connecticut General Statutes.

"Low Impact Development" or "LID" means a site design strategy that maintains, mimics or replicates pre-development hydrology through the use of numerous site design principles and small-scale treatment practices distributed throughout a site to manage runoff volume and water quality at the source.

"Minimize", for purposes of implementing the minimum control measures in Section 6 of this general permit, means to reduce and/or eliminate to the Maximum Extent Practicable (MEP) as described in Section 5(b).

"Municipal separate storm sewer system" or "MS4" means conveyances for stormwater (including roads with drainage systems, streets, catch basins, curbs, gutters, ditches, man-made channels or storm drains) owned or operated by any municipality or by any state or federal institution and discharging to surface waters of the state.

"Municipality" means a city, town or borough of the state as defined in section 22a-423 of the Connecticut General Statutes.

"New or Increased Discharge" means new discharge or activity as defined in section 22a-426-8(b)(3) and increased discharge or activity as defined in section 22a-426-8(b)(2), as referenced to the Regulations of Connecticut State Agencies.

"Permittee" means any municipality or any state or federal institution that initiates, creates, originates or maintains a discharge authorized by this general permit and that has filed a registration pursuant to Section 4 of this permit.

"Point Source" means any discernible, confined and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, vessel or other floating craft from which pollutants are or may be discharged.

"Qualified professional engineer" means a professional engineer who: (1) has, for a minimum of eight (8) years, engaged in the planning and designing of engineered stormwater management systems for (i) municipal separate storm sewer systems and (ii) residential and commercial construction projects in accordance with the Guidelines and the Stormwater Quality Manual including, but not limited to, a minimum of four (4) years in responsible charge of the planning and designing of engineered stormwater management systems for such projects; or (2) is currently certified as a Professional in MS4 Stormwater Compliance as designated by EnviroCert International, Incorporated, or other certifying organization acceptable to the Commissioner, and for a minimum of six (6) years, has engaged in the planning and designing of engineered stormwater management systems for (i) municipal separate storm sewer systems and (ii) residential and commercial construction projects in accordance with the Guidelines and the Stormwater Quality Manual including, but not limited to, a minimum of two (2) years in responsible charge of the planning and designing of engineered stormwater management systems for such projects; or (3) currently provides engineering services for the Permittee by employ (e.g. Town Engineer) or by contract.

"Registrant" means a municipality or institution which files a registration pursuant to Section 4 of this general permit.

"Redevelopment" means any construction activity (including, but not limited to, clearing and grubbing, grading, excavation, and dewatering) within existing drainage infrastructure or at an existing site to modify or expand or add onto existing buildings or structures, grounds, or infrastructure.

"Registration" means a registration form filed with the Commissioner pursuant to Section 4 of this general permit.

"Retain" means to hold runoff on-site to promote vegetative uptake and groundwater recharge through the use of runoff reduction or LID practices or other measures. In addition, it means there shall be no subsequent point source release to surface waters from a storm event defined in this general permit or as approved by the Commissioner.

"Runoff reduction practices" means those post-construction stormwater management practices used to reduce post-development runoff volume delivered to the receiving water, as defined by retaining the volume of runoff from a storm up to the first half inch or one inch of rainfall in accordance with Sections 6(a)(5)(B)(i) or (ii), respectively. Runoff reduction is quantified as the total annual post-development runoff volume reduced through canopy interception, soil amendments, evaporation, rainfall harvesting, engineered infiltration, extended filtration or evapotranspiration.

"Sanitary Sewer Overflow" or "SSO" means a discharge of untreated sanitary wastewater from a municipal sanitary sewer.

- "Small MS4" means any municipally-owned or -operated MS4 (as defined above) including all those located partially or entirely within an Urbanized Area that have at least 1,000 residents in the Urbanized Area (as determined by the 2000 or 2010 census) and all state- and federally-operated MS4s (except DOT) and any other MS4s located outside an Urbanized Area as may be designated by the Commissioner. (Note: A list of Small MS4 municipalities is included in Appendix A of this general permit. DOT will be authorized under a separate permit.)
- "Standard of care", as used in Section 3(b)(9), means to endeavor to perform in a manner consistent with that degree of care and skill ordinarily exercised by members of the same profession currently practicing under similar circumstances.
- "State or Federal Institution" or "institution" means any facility (including, but not limited to, state and federal prisons, office complexes, hospitals; university campuses, public housing authorities, schools, or other special districts) consisting of more than one building that is owned by an agency or department of the State of Connecticut (except the Department of Transportation) or a federal agency and has an average daily population of 1,000 people or more.
- "Stormwater" means waters consisting of rainfall runoff, including snow or ice melt during a rain event.
- "Stormwater Quality Manual" means the Connecticut Stormwater Quality Manual published by the Connecticut Department of Energy & Environmental Protection in 2004, as amended and maintained at http://www.ct.gov/deep/stormwaterqualitymanual.
- "Surface water" means those waters as defined in Section 22a-426-1(60) of the Regulations of Connecticut State Agencies.
- "Tidal wetland" means a wetland as that term is defined in Section 22a-29(2) of the Connecticut General Statutes.
- "Total Maximum Daily Load (TMDL)" means a water quality implementation plan established pursuant to Section 303 of the federal Clean Water Act.
- "Urbanized Area (UA)" means the areas of the State of Connecticut so defined by the U.S. Census Bureau for the 2000 or 2010 census.
- "Water Quality Standards or Classifications" means those water quality standards or classifications contained in Sections 22a-426-1 through 22a-426-9, inclusive, of the Regulations of Connecticut State Agencies and the Classification Maps adopted pursuant to Section 22a-426 of the Connecticut General Statutes, which together constitute the Connecticut Water Quality Standards., as may be amended.
- "Water Quality Volume" or "WQV" means the volume of runoff generated by one inch of rainfall on a site as defined in the Connecticut Stormwater Quality Manual.

Section 3. Authorization Under This General Permit

(a) Eligible Activities

- (1) This general permit authorizes the discharge of stormwater from or associated with a Small MS4, provided the requirements of subsection (b) of this section are satisfied and the activity is conducted in accordance with the conditions listed in Section 5 of this general permit to the Maximum Extent Practicable (as defined in Section 5(b)).
- (2) This permit authorizes the following non-stormwater discharges provided: the permittee controls such non-stormwater discharges to the Maximum Extent Practicable (MEP), as required by this general permit; such non-stormwater discharges do not contribute to a violation of water quality standards; and such non-stormwater discharges are documented in the Stormwater Management Plan and are not significant contributors of pollutants to any identified MS4:
 - uncontaminated ground water discharges including, but not limited to, pumped ground water, foundation drains, water from crawl space pumps and footing drains;
 - irrigation water including, but not limited to, landscape irrigation and lawn watering runoff;
 - residual street wash water associated with sweeping;
 - discharges or flows from firefighting activities (except training); and
 - naturally occurring discharges such as rising ground waters, uncontaminated ground water infiltration (as defined at 40 CFR 35.2005(20)), springs, diverted stream flows and flows from riparian habitats and wetlands.
- (3) Any non-stormwater discharge to the MS4 authorized by a permit issued pursuant to Section 22a-430 or 22a-430b of the Connecticut General Statutes is also authorized under this general permit.

(b) Requirements for Authorization

This general permit authorizes the activity listed in the "Eligible Activities" section (Section 3(a)) of this general permit provided:

(1) Coastal Management Act

Such activity is consistent with all applicable goals and policies in Section 22a-92 of the Connecticut General Statutes, and must not cause adverse impacts to coastal resources as defined in Section 22a-93(15) of the Connecticut General Statutes.

(2) Endangered and Threatened Species

Implementation of the permittee's Stormwater Management Plan shall not threaten the continued existence of any species listed pursuant to section 26-306 of the Connecticut General Statutes as endangered or threatened and must not result in the destruction or adverse modification of habitat designated as essential to such species unless otherwise exempted by Federal statute.

(3) Aquifer Protection Areas

Such activity, if it is located within an aquifer protection area as mapped under section 22a-354b of the Connecticut General Statutes, must comply with regulations adopted pursuant to section 22a-354i of the Connecticut General Statutes.

(4) Discharge to POTW

The stormwater is *not* discharged to a Publicly Owned Treatment Works (POTW).

(5) Discharge to Groundwater

The stormwater is *not* discharged entirely to groundwater, meaning a stormwater discharge to a surface water will not occur up to a 100-year, 24-hour rainfall event.

(6) New or Increased Discharges to High Quality Waters

On or before thirty (30) days prior to the commencement of a new or increased discharge to a High Quality Waters from its MS4, the permittee must document compliance with the Connecticut Anti-Degradation Implementation Policy in the Water Quality Standards, as amended. Before commencing any new or increased discharge, the permittee shall identify in its Stormwater Management Plan ("Plan"), the control measures it will implement to ensure compliance with anti-degradation provisions and the terms of this Permit. At a minimum, the permittee shall evaluate and implement to the Maximum Extent Practicable practices which will prevent the discharge of the Water Quality Volume to a surface water body or other practices necessary to protect and maintain designated uses and meet standards and criteria contained in the Water Quality Standards.

(7) New or Increased Discharges to Impaired Waters

There shall be no increased discharges from the MS4 to impaired waters listed in categories 5 or 4b of the most recent Connecticut Integrated Water Quality Report of waters listed pursuant to Clean Water Act section 303(d) and 305(b) unless the permittee demonstrates that there is no net increase in loading by the MS4 to the impaired water of the pollutant(s) for which the waterbody is impaired. The permittee may demonstrate no net increase by either:

- (A) Documenting that the pollutant(s) for which the waterbody is impaired is not present in the MS4's discharge and retain documentation of this finding with the Plan; or
- (B) Documenting that the total load of the pollutant(s) of concern from the MS4 to any impaired portion of the receiving water will not increase as a result of the activity and retain documentation of this finding in the Plan. Compliance with the requirements for Runoff Reduction and Low Impact Development measures for new development and redevelopment in Sections 6(a)(5)(A) and (B) shall be considered as demonstrating no net increase. Requirements for discharges to impaired waters are included in Section 6(k) of this general permit.

(8) Certification Requirements for Registrants and other Individuals

As part of the registration for this general permit, the registrant and any other individual or individuals principally responsible for preparing the registration submits to the Commissioner a written certification which, at a minimum, complies with the following requirements:

- (A) The registrant and any other individual or individuals responsible for preparing the registration and signing the certification has completely and thoroughly reviewed, at a minimum, this general permit and the following regarding the activities to be authorized under such general permit: (i) all registration information provided in accordance with Section 4(c)(2) of such general permit, (ii) the Stormwater Management Plan, and (iii) any plans and specifications and any Department approvals regarding such Stormwater Management Plan;
- (B) The registrant and any other individual or individuals responsible for preparing the registration and signing the certification pursuant to this general permit has, based on the review described in section 3(b)(8)(A) of this general permit, made an affirmative determination to: (i) comply with the terms and conditions of this general permit; (ii) maintain compliance with all plans and documents prepared pursuant to this general permit including, but not limited to, the Stormwater Management Plan; (iii) properly implement and maintain the elements of the Stormwater Management Plan; and (iv) properly operate and maintain all stormwater management measures and systems in compliance with the terms and conditions of this general permit to protect the waters of the state from pollution;
- (C) Such registrant and any other individual or individuals responsible for preparing the registration certifies to the following statement:

"I hereby certify that I am making this certification in connection with a registration under the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems, submitted to the Commissioner by [INSERT NAME OF REGISTRANT] for an activity located at or within [NAME OF MUNICIPALITY OR ADDRESS OF THE REGISTERED ACTIVITY] and that all terms and conditions of the general permit are being met for all discharges which have been created, initiated or maintained and such activity is eligible for authorization under such permit. I further certify that a system is in place to ensure that all terms and conditions of this general permit will continue to be met for all discharges authorized by this general permit at the site. I certify that I have personally examined and am familiar with the information that provides the basis for this certification, including but not limited to all information described in Section 3(b)(8)(A) of such general permit, and I certify, based on reasonable investigation, including my inquiry of those individuals responsible for obtaining such information, that the information upon which this certification is based is true, accurate and complete to the best of my knowledge and belief. I certify that I have made an affirmative determination in accordance with Section 3(b)(8)(B) of this general permit. I understand that the registration filed in connection with such general permit is submitted in accordance with and shall comply with the requirements of Section 22a-430b of Connecticut General Statutes, as amended by Public Act 12-172. I also understand that knowingly making any false statement made in the submitted information and in this certification may be punishable as a criminal offense, including

the possibility of fine and imprisonment, under section 53a-157b of the Connecticut General Statutes and any other applicable law."

(9) Stormwater Management Plan Certification

As part of the registration for this general permit, the registrant submits to the Commissioner a written certification by a qualified professional engineer who has reviewed the Stormwater Management Plan (Plan) in accordance with the following requirements:

(A) The qualified professional engineer has, at a minimum, completely and thoroughly reviewed this general permit and the following regarding the discharges to be authorized under such general permit: (i) all registration information provided in accordance with Section 4(c)(2) of such general permit, (ii) the Stormwater Management Plan, and (iii) all non-engineered and engineered stormwater management measures and systems, including any plans and specifications and any Department approvals regarding such stormwater management measures and systems.

(B) Affirmative Determination

A qualified professional engineer signing the certification must have made an affirmative determination, based on the review described in section 3(b)(9)(A) of this general permit and on best engineering practices, that the Plan and control measures therein are adequate to assure that the activity authorized under this general permit will comply with the terms and conditions of such general permit and all non-engineered and engineered stormwater management measures and systems: (i) have been designed in accordance with best engineering practices; (ii) will function properly as designed; (iii) are adequate to ensure compliance with the terms and conditions of this general permit; and (iv) will protect the waters of the state from pollution.

(C) The qualified professional engineer, as specified in section 3(b)(9)(A), above, shall certify to the following statement:

"I hereby certify that I am a qualified professional engineer, as defined in the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems. I am making this certification in connection with a registration under such general permit, submitted to the Commissioner by [INSERT NAME OF REGISTRANT] for an activity located at or within [NAME OF MUNICIPALITY OR ADDRESS OF THE REGISTERED ACTIVITY]. I have personally examined and am familiar with the information that provides the basis for this certification, including but not limited to all information described in Section 3(b)(9)(A) of such general permit, and I certify, based on reasonable investigation, including my inquiry of those individuals responsible for obtaining such information, that the information upon which this certification is based is true, accurate and complete to the best of my knowledge and belief. I certify, based on my review of all information described in Section 3(b)(9)(A) of such general permit and on the standard of care for such projects, that I have made an affirmative determination in accordance with Section 3(b)(9)(B) of this general permit. I understand that this certification is part of a registration submitted in accordance with Section 22a-430b of Connecticut General Statutes and is subject to the requirements and responsibilities for a qualified professional in such statute. I also understand that knowingly making any false statement in this certification may be punishable as a criminal offense, including the possibility of fine and imprisonment.

under section 53a-157b of the Connecticut General Statutes and any other applicable law."

(D) Nothing in this subsection shall be construed to authorize or require a qualified professional engineer to engage in any profession or occupation requiring a license under any other provision of the Connecticut General Statutes without such license.

(c) Registration

Pursuant to the "Registration Requirements" section (Section 4) of this permit, a Small MS4 shall submit a Registration Form (accessible from the DEEP website) to the Commissioner at least ninety (90) days prior to the effective date of this general permit. The form will guide the registrant to submit the appropriate information.

Include any additional forms and information regarding compliance and/or consistency with the Coastal Management Act, High Quality Waters, Impaired Waters (including TMDL requirements), Endangered and Threatened Species, and Aquifer Protection Areas that may be required pursuant to the "Requirements of Authorization" section (Section 3(b)).

(d) Geographic Area

This general permit applies throughout the State of Connecticut.

(e) Effective Date and Expiration Date of this General Permit

This general permit is effective July 1, 2017 and expires on June 30, 2022.

(f) Effective Date of Authorization

An activity is authorized by this general permit: on the date the general permit becomes effective; on the date a complete registration meeting the requirements of Section 4(c) is submitted; for registrants that did not register as required by Section 3(c), on the date the authorized activity is initiated; or on another date approved by the Commissioner, whichever is latest.

Section 4. Registration Requirements

(a) Who Must File a Registration

Any municipality or state or federal institution that initiates, creates, originates or maintains a discharge of stormwater from or associated with a Small MS4 shall file with the Commissioner a registration form that meets the requirements of this section of this general permit. Such form shall be submitted along with the applicable fee within the timeframes and in the amounts specified in Sections 3(c) and 4(c)(1)(A), respectively.

(b) Scope of Registration

A registrant must register on one registration form by the date indicated in Section 3(c) for all discharges that are operated by the registering municipality or institution. A registrant may not submit more than one registration under this general permit.

(c) Contents of Registration

- (1) Fees
 - (A) The registration fee for a Small MS4 shall be \$625 to be submitted with the registration form.
 - (B) The fees for municipalities shall be half of those indicated in subsection (A) above pursuant to section 22a-6(b) of the Connecticut General Statutes. State and Federal agencies shall pay the full fees specified in this subsection.
 - (C) The registration fee shall be paid electronically or by check or money order payable to the **Department of Energy & Environmental Protection**.
 - (D) No activity shall be authorized by this general permit until the registration fee has been paid in full.
 - (E) The registration fee is non-refundable.

(2) Registration Form

The registration shall be filed in a form prescribed and provided by the Commissioner (available on the DEEP website) and shall include the following:

- (A) Name of the permittee and the name, title, address, telephone number, permit number (for existing 2004 MS4 permittees) and email address of the chief elected official or principal executive officer.
- (B) Name, address, telephone number, and email address of the primary contact person for the permittee.
- (C) Name, primary contact, address, telephone number, and email address of any consultant(s) or engineer(s) retained by the permittee to prepare the registration,
- (D) Name of receiving stream(s), watershed(s) or waterbody(s) (including waterbody ID number which can be identified at www.cteco.uconn.edu) to which the MS4 discharges and indication of whether or not a receiving stream is listed as an impaired water, with or without a TMDL, and including identification of the impairment in the most recent State of Connecticut Integrated Water Quality Report or identification of the receiving stream as a high quality water by the Commissioner as defined in the Connecticut Water Quality Standards.
- (E) An electronic map or a paper copy of the relevant portion or a full-sized original of a United States Geological Survey (USGS) quadrangle map with a scale of 1:24,000, showing the permittee's boundaries and limits of its separate storm sewer system. If a paper copy of a map is submitted, identify the quadrangle name on the map and be sure to include the name of the permittee.
- (F) Assurance that the Stormwater Management Plan for the MS4 is consistent with the following provisions of state statutes and regulations, as appropriate:

- (i) For sites within the Coastal Boundary, the permittee must address all applicable goals and policies in Section 22a-92 of the Connecticut General Statutes, and must not cause adverse impacts to coastal resources as defined in Section 22a-93(15) of the Connecticut General Statutes.
- (ii) The permittee's Stormwater Management Plan will not threaten the continued existence of any species listed pursuant to section 26-306 of the Connecticut General Statutes as endangered or threatened and will not result in the destruction or adverse modification of habitat designated as essential to such species.
- (iii) The implementation of the permittee's Stormwater Management Plan for any part of the MS4 located within an aquifer protection area (see Appendix C) as mapped under section 22a-354b of the Connecticut General Statutes will comply with regulations adopted pursuant to section 22a-354i of the Connecticut General Statutes. For any activity regulated pursuant to sections 8(c) and 9(b) of the Aquifer Protection Regulations (section 22a-354i(1)-(10) of the Regulations of Connecticut State Agencies), the Stormwater Management Plan must assure that stormwater run-off generated from the MS4 is managed in a manner so as to prevent pollution of groundwater.
- (iv) The Stormwater Management Plan has been reviewed for consistency with state Historic Preservation statutes, regulations, and policies including identification of any potential impacts on property listed or eligible for listing on the Connecticut Register of Historic Places. A review conducted for an Army Corps of Engineers Section 404 wetland permit would meet this qualification.
- (v) The Stormwater Management Plan appropriately addresses new or increased discharges to high quality waters, as specified in Section 3(b)(6).
- (vi) The Stormwater Management Plan appropriately addresses new or increased discharges to impaired waters, as specified in Section 3(b)(7).
- (G) For each of the Minimum Control Measures in Section 6(a), the following information shall be included:
 - (i) each Best Management Practice (BMP) to be implemented;
 - (ii) the person(s) responsible for implementing and maintaining each BMP;
 - (iii) the date by which each BMP will be implemented;
 - (iv) the measurable goal(s) by which each BMP will be evaluated.
- (H) Provide an internet address (URL) where the Stormwater Management Plan required by Section 5(b) and the Annual Reports required by Section 6(j) are accessible for public review. Also provide a physical address where a paper copy of the Plan and Annual Reports are available for inspection. If the registrant claims that certain elements of their Plan constitute secure information (pursuant to Section 4(d)(2)) or are otherwise exempt from the disclosure requirements of the state Freedom of Information Act (section 1-210 et seq of the Connecticut General Statutes, also called FOIA) as specified in that Act, the registrant shall follow the procedures provided in the

registration form instructions for this general permit regarding information subject to FOIA requirements. The process of complying with the FOIA requirements does not exempt the registrant from the registration and Plan preparation deadlines of this general permit.

- (I) The certification of the registrant and of the individual or individuals responsible for actually preparing the registration, in accordance with Section 3(b)(8).
- (J) Certification (pursuant to the requirements and conditions of Section 3(b)(9)) that the Stormwater Management Plan has been reviewed by a qualified professional engineer (as defined in Section 2) licensed in the State of Connecticut.

(d) Availability of Registrations, Stormwater Management Plans and Annual Reports

(1) Registration Availability

Within thirty (30) days of receipt of a registration, the Commissioner shall post on the DEEP website a list of registrations submitted and identify the location where the Stormwater Management Plan is available.

On or before sixty (60) days from the date of posting of a registration by the Commissioner, members of the public may review the registration and submit written comments to the Commissioner.

(2) Stormwater Management Plan Availability

A permittee shall make its Stormwater Management Plan (Plan) available, electronically and at a publicly available location, for public review and comment at least ninety (90) days prior to the effective date of this general permit. The permittee shall also provide the internet address (URL) where the Plan may be located or an electronic copy to the Commissioner. Within thirty (30) days of receipt of a Stormwater Management Plan (or its URL), the Commissioner shall post on the DEEP website a list of Plans submitted and identify the location where the Plan will be available for review. In addition to the internet address (URL) required as part of the registration (pursuant to Section 4(c)(2)(H)), reasonable efforts to inform the public of this document shall be undertaken by the permittee. The Plan shall be made available at the permittee's main office or other designated municipal or institution office, a local library or other publicly available location for public inspection and copying consistent with the federal and state Freedom of Information Acts. On or before sixty (60) days from the date of the availability of the Plan, members of the public may review the Plan and submit written comments on it to the Commissioner.

If the registrant claims that certain elements of their Plan constitute secure information subject to restrictions related to Homeland Security or other security issues otherwise exempt from the disclosure requirements of the state Freedom of Information Act (section 1-210 et seq of the Connecticut General Statutes, also called FOIA) as specified in that Act, they shall follow the procedures provided in the registration form instructions for this general permit regarding information subject to FOIA requirements. The process of complying with the FOIA requirements does not exempt the registrant from the registration and Plan preparation deadlines in this general permit.

Following the comment period specified above, the final Plan shall remain available for public inspection on-line and a paper copy made available at the location specified above during regular business hours.

(3) Annual Report Availability

At least forty five (45) days prior to submission of each Annual Report to the Department, pursuant to Section 6(j), each permittee shall make available for public review and comment a draft copy of the complete Annual Report. Comments on the Annual Report may be made to the permittee and are *not* submitted to the Department. Reasonable efforts to inform the public of this document shall be undertaken by the permittee. Such draft copies shall be made available electronically on the permittee's website for public inspection and copying consistent with the federal and state Freedom of Information Acts and at at least one of the following locations: the permittee's main office or other designated municipal or institution office, a local library or other central publicly available location. Following submission of the Annual Report (pursuant to Section 6(j)), a copy of the final report shall be made available for public inspection during regular business hours.

(e) Where to File a Registration

A registration shall be filed with the Commissioner on forms available through the DEEP website.

(f) Additional Information

The Commissioner may require a registrant to submit additional information, which the Commissioner reasonably deems necessary to evaluate the consistency of the subject activity with the requirements for authorization under this general permit.

(g) Additional Notification

For discharges authorized by this general permit to another regulated Small MS4 or to the City of Stamford, a copy of the registration and all attachments thereto shall also be submitted to the owner and operator of that system.

For discharges authorized by this general permit to a DOT separate storm sewer system, a copy of the registration and all attachments thereto shall also be submitted to the DOT upon request.

For discharges within a public drinking water supply watershed or aquifer area, the permittee shall notify the water company of the availability (pursuant to Sections 4(d)(1) and (2), above) of the registration and the Plan described in subsection 5(b) of this general permit or the registration and Plan shall be submitted to the water company upon request.

For discharges to river components and tributaries which have been designated as Wild and Scenic under the Wild and Scenic Rivers Act, a copy of the registration and the Plan described in 5(b) of this general permit shall be submitted to the applicable Wild and Scenic Coordinating Committee upon request.

(h) Action by Commissioner

- (1) The Commissioner may require that a permittee obtain an individual permit for any discharge authorized by this permit in accordance with Section 22a-430b of the Connecticut General Statutes.
- (2) The Commissioner may reject without prejudice a registration if he or she determines that it does not satisfy the registration requirements (Section 4(c)) of this general permit. Any registration refiled after such a rejection shall be accompanied by the fee specified in the "Fees" section (Section 4(c)(1)) of this general permit.
- (3) The Commissioner may disapprove a registration if he or she finds that the subject activity is inconsistent with the "Requirements for Authorization" section (Section 3(b)) of this general permit, or for any other reason provided by law.
- (4) Disapproval of a registration under this subsection shall constitute notice to the registrant that the subject activity must be authorized by an individual permit.
- (5) Disapproval of a registration shall be in writing.

Section 5. Requirements of this General Permit

The permittee shall at all times continue to meet the requirements for authorization set forth in Section 3 of this general permit. In addition, a permittee shall ensure that authorized activities are conducted in accordance with the following conditions:

(a) Conditions Applicable for Certain Discharges

- (1) If the permittee initiates, creates, or originates a discharge of stormwater which is located less than 500 feet from a tidal wetland that is not a fresh-tidal wetland, such discharge shall flow through a system designed to retain the Water Quality Volume, as defined in Section 2.
- (2) If the permittee wishes to initiate, create, or originate a discharge of stormwater below the coastal jurisdiction line into coastal, tidal, or navigable waters for which a permit is required under the Structures and Dredging Act in accordance with Section 22a-361(a) of the Connecticut General Statutes or into tidal wetlands for which a permit is required under the Tidal Wetlands Act in accordance with Section 22a-32 of the Connecticut General Statutes, the municipality shall obtain such permit(s) from the Commissioner prior to initiating, creating or originating such discharge.
- (3) There shall be no distinctly visible floating scum, oil or other matter contained in the stormwater discharge. Excluded from this are naturally occurring substances such as leaves and twigs provided no person has placed such substances in or near the discharge.
- (4) The stormwater discharge shall not result in pollution which may cause or contribute to acute or chronic toxicity to aquatic life, impair the biological integrity of aquatic or marine ecosystems, or result in an unacceptable risk to human health.

- (5) The stormwater discharge shall not cause or contribute to an exceedance of the applicable Water Quality Standards in the receiving water.
- (6) Any new stormwater discharge to high quality waters (as identified by the Commissioner consistent with the Water Quality Standards) shall be discharged in accordance with the Connecticut Anti-Degradation Implementation Policy in the Water Quality Standards manual. At a minimum, the permittee shall evaluate and implement to the Maximum Extent Practicable practices which will prevent the discharge of the Water Quality Volume to a surface water body or other practices necessary to protect and maintain designated uses and meet standards and criteria contained in the Water Quality Standards.
- (7) Any stormwater discharge to the waters identified in Appendix D shall be managed for the Stormwater Pollutant of Concern identified in the appendix consistent with the requirements in Section 6 of this permit.

(b) Stormwater Management Plan

The permittee shall develop, implement, and enforce a stormwater management plan designed to reduce the discharge of pollutants from the Small MS4 to the maximum extent practicable, to protect water quality, and to satisfy the appropriate water quality requirements of the federal Clean Water Act. Maximum Extent Practicable (MEP) is a technology-based standard established by Congress in the Clean Water Act Section 402(p)(3)(B)(iii). Since no precise definition of MEP exists, it allows for maximum flexibility on the part of MS4 operators as they develop their programs. (40CFR 122.2, See also: Stormwater Phase II Compliance Assistance Guide EPA 833-R-00-002, March 2000). When trying to reduce pollutants to the MEP, there must be a serious attempt to comply, and practical solutions may not be lightly rejected. Factors such as the conditions of receiving waters, specific local concerns, MS4 size, climate, implementation schedules, current ability to finance the program, beneficial uses of receiving water, hydrology, geology, and capacity to perform operation and maintenance should be considered in determining whether permittee has complied with this general permit to the Maximum Extent Practicable.

Under this program, the permittee shall prepare a Stormwater Management Plan pursuant to Section 6 of this general permit, which plan must be completed by such time as specified in Section 4(d)(2) of this general permit. The permittee shall continue to implement the Stormwater Management Plan and all Minimum Control Measures required by this general permit throughout the entire term of the general permit. The permittee shall continue to provide for adequate staffing and economic resources for such implementation throughout the entire term of the general permit. If at any time the Commissioner finds that the Plan is not adequate to protect the waters of the state from pollution, the Commissioner may terminate authorization under this permit and require the permittee to submit an individual permit application.

Failure to implement all elements of the Stormwater Management Plan to the MEP constitutes a violation of this permit.

Section 6. Development of Stormwater Management Plan (Plan)

The Plan shall address the Minimum Control Measures as indicated in this section. Section 6(a) contains the requirements for Small MS4s. These measures shall be implemented throughout the boundaries of the municipality or institution except as otherwise indicated in this section.

(a) Minimum Control Measures

For each Minimum Control Measure, the permittee shall: define appropriate BMPs; designate a person(s) and job title responsible for each BMP; define a time line for implementation of each BMP; where appropriate, identify the location, including the address and latitude and longitude, for each BMP; and define measurable goals for each BMP. The Minimum Control Measures in the Plan include, but are not limited to:

(1) Public education and outreach

The goals of this minimum control measure are:

- To raise awareness that polluted stormwater runoff is the most significant source of water quality problems;
- To motivate residents to use Best Management Practices (BMPs) which reduce polluted stormwater runoff; and
- To reduce polluted stormwater runoff as a result of increased awareness and utilization of BMPs.
- (A) Implement a public education program to distribute educational materials to the permittee's community (i.e. residents, business and commerce, students, staff, contractors, etc.) or conduct equivalent outreach activities about the sources and impacts of stormwater discharges on waterbodies and the steps that the public can take to reduce pollutants in stormwater runoff. The education program shall include, but not be limited to, information on management of pet waste, application of fertilizers. herbicides, and pesticides, impervious cover and impacts of illicit discharges and improper disposal of waste into the MS4. The form and content of the education program will be dependent on the audience and identified areas of concern for each MS4. Permittees may join other permittees in the same region to develop and implement a public education program. Educational information may be developed and/or acquired from other permittees, governmental agencies, community and nongovernmental organizations, councils of government, academia, and/or environmental advocacy organizations. Outreach resources will be available from the DEEP stormwater webpage at www.ct.gov/deep/stormwater. Information may be disseminated with flyers, brochures, door hangers, television public service announcements, and/or web based tools. Each Annual Report shall summarize the types, sources, number of, and methods by which materials disseminated.
 - (i) Permittees previously authorized by the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems issued on January 9, 2004 (existing 2004 MS4 permittees) shall begin implementation of this measure within the first year following the effective date of this permit and continue until permit expiration. Permittees shall utilize the materials developed under the 2004 MS4 permit and update or modify as necessary to acquire and/or develop the content of the outreach materials for this general permit.
 - (ii) Permittees not previously authorized by the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems issued on January 9, 2004 (new MS4 permittees) shall begin implementation of this measure within the second year following the effective date of this permit and continue until

permit expiration. Permittees shall utilize the one year period following the effective date of this permit to acquire and/or develop the content of the outreach materials.

- (B) To implement the public education and outreach program, the permittee shall develop or acquire current educational material from DEEP and other sources that identifies the pollutants (such as pathogens/bacteria, nitrogen, phosphorus, sediments, metals, oils & greases) associated with stormwater discharges, the potential sources of the pollutants, the environmental impacts of these pollutants, and related pollution reduction practices.
- (C) Additional measures for discharges to waters associated with a Stormwater Pollutant of Concern

These measures may be implemented solely by the permittee or as part of a collaborative regional or statewide program to address the issue. However, the permittee retains sole responsibility for compliance with this section. The method of implementation shall be indicated in the permittee's Plan.

- (i) For waters for which **Phosphorus** is a Stormwater Pollutant of Concern, educational materials shall be specifically tailored and targeted to educate on the sources, impacts, and available pollution reduction practices from the following:
 - a. Septic systems
 - b. Fertilizer use
 - c. Grass clippings and leaves management
 - d. Detergent use
 - e. Discharge of sediment (to which Phosphorus binds) from Construction sites
 - f. Other erosive surfaces
- (ii) For waters for which **Nitrogen** is a Stormwater Pollutant of Concern, educational materials shall be specifically tailored and targeted to educate on the sources, impacts, and available pollution reduction practices from the following:
 - a. Septic systems
 - b. Fertilizer use
 - c. Grass clippings and leaves management
 - d. Discharge of sediment (to which Nitrogen binds) from Construction sites
 - e. Other erosive surfaces
- (iii) For waters for which **Bacteria** is a Stormwater Pollutant of Concern, educational materials shall be specifically tailored and targeted to educate on the sources, impacts, and available pollution reduction practices from the following:
 - a. Septic systems
 - b. Sanitary cross connections
 - c. Waterfowl
 - d. Pet waste
 - e. Manure piles associated with livestock and horses
- (iv) For waters for which **Mercury** is a Stormwater Pollutant of Concern, educational materials shall be specifically tailored and targeted to educate on the sources,

impacts and available recycling programs for elemental mercury and mercury-containing items such as:

- a. Thermometers
- b. Thermostats
- c. Fluorescent lights
- d. Button cell batteries

(D) Suggested Strategies.

- (i) Target specific populations: Each permittee is encouraged to direct such outreach program and/or materials at specific populations. Such target populations may include, for example, school age populations, farming populations, and urban populations. Sample educational material for each Stormwater Pollutant of Concern noted above will be made available by DEEP.
- (ii) Partner with local organizations: Permittees may wish to include in its outreach efforts various local organizations which may be able to assist in helping to spread the stormwater message.

(2) Public Involvement/Participation

The permittee shall provide opportunities to engage their community to participate in the review and implementation of the permittee's Plan. The goal of this minimum control measure is to involve the community in both the planning and implementation process of improving water quality. Public participation is beneficial to the success of a municipal stormwater management program because it allows for a broader public support, additional expertise, and a conduit to other programs. Community members are also more likely to apply these lessons/BMPs at home if they are part of the process.

- (A) Publish a public notice on the permittee's website, through an email or mailing list, if the permittee maintains one, or in a newspaper with general circulation in the area to inform the public of the Plan and the Annual Report required by Section 6(j) of this permit and to solicit comments on the Plan and Annual Report. The notice shall provide a contact name (with phone number, address, and email) to whom the public can send comments and a publicly accessible location (such as the MS4's main office or other designated municipal office, a local library or other central publicly available location) and/or URL where the Plan and Annual Report are available for public review. The public notice shall allow for a 30 day comment period, at a minimum. Municipalities and institutions shall publish this public notice annually no later than January 31.
- (B) The permittee is encouraged to enlist local organizations to help implement the elements of their Plan. However, the permittee retains sole responsibility for permit compliance.
- (C) No requirements in addition to those specified in subsections (A)-(B), above, are specified for discharges to waters impaired for Phosphorus, Nitrogen, Bacteria, or Mercury.

(3) Illicit discharge detection and elimination.

Within one (1) year of the effective date of this general permit for existing 2004 MS4 permittees and within two (2) years of the effective date of this general permit for new MS4 permittees, the permittee shall develop a written Illicit Discharge Detection and Elimination (IDDE) program designed to: provide the legal authority to prohibit and eliminate illicit discharges (as defined in Section 2 except for those discharges noted in the Section 3(a)(2) of this permit) to the MS4; find the source of any illicit discharges; eliminate those illicit discharges; and ensure ongoing screening and tracking to prevent and/or eliminate future illicit discharges. Failure to implement all elements of the IDDE program to the MEP constitutes a violation of this permit.

(A) IDDE Program Elements

- (i) The permittee shall, at a minimum, implement the IDDE program elements in this section and the IDDE protocol in Appendix B within the Urbanized Area and those catchment areas of the MS4 with either Directly Connected Impervious Area (DCIA) of greater than 11% (as identified on maps available at www.ct.gov/deep/municipalstormwater) or which discharge to impaired waters ("priority" areas). The permittee is encouraged to develop a prioritizing strategy to identify areas outside these identified areas to further implement these IDDE measures. This prioritizing strategy should utilize the prioritizing elements included in Section (A)(7)(c) of Appendix B.
- (ii) Illicit discharges to the MS4 by any person are prohibited, and any such discharges are not authorized by the general permit, are unlawful, and remain unlawful until they are eliminated. The permittee shall prohibit all illicit discharges from entering its MS4. Upon detection, the permittee shall eliminate illicit discharges as soon as possible and require the immediate cessation of such discharges upon confirmation of responsible parties in accordance with its enforceable legal authorities established pursuant to subsection (B) below. Where elimination of an illicit discharge within sixty (60) days of its confirmation is not possible, the permittee shall establish a schedule for its elimination not to exceed 180 days (six (6) months). The permittee shall immediately commence actions necessary for elimination. The permittee shall diligently pursue elimination of all illicit discharges. In the interim, the permittee shall take all reasonable and prudent measures to minimize the discharge of pollutants to its MS4.
- (iii) The permittee shall develop a program for citizen reporting of illicit discharges. This may include maintaining a website, email list or mailing program that provides clear instructions for the public describing how citizens can submit an illicit discharge report. The reporting program shall provide an email address and/or a phone number or other means for submissions. The permittee shall affirmatively investigate and eliminate any illicit discharges reported to it by any citizen or organization, provided that such report incorporates at least a time and location of an observed discharge. The permittee shall commence inspection of such a reported outfall or manhole promptly after receiving such a report, and incorporate those reported outfalls into its IDDE program subject to all provisions

- of this subsection (3) and of Appendix B. All citizen reports and the responds to those reports shall be included in the Annual Report.
- (iv) The permittee shall implement outfall screening and an illicit discharge detection protocol pursuant to **Appendix B** to identify, prioritize, and investigate separate storm sewer catchments for suspected illicit discharges of pollutants.
- (v) The permittee shall maintain a record of illicit discharge abatement activities including, at a minimum: location (identified with an address or latitude and longitude), description, date(s) of inspection, sampling data (if applicable), action(s) taken, date of removal or repair and responsible party(ies). This information shall be included in the permittee's Annual Report pursuant to the Section 6(j) of this permit.
- (vi) Timelines permittees shall implement IDDE program elements in accordance with the schedules included in this section and in Appendix B.
- (B) Establish the necessary and enforceable legal authority by statute, ordinance, rules and regulations, permit, easement, contract, order or any other means, to eliminate illicit discharges.
 - (i) The legal authority shall:
 - a. prohibit illicit discharges to its storm sewer system and require removal of such discharges consistent with subsection (3)(A), above; and
 - control the discharge of spills and prohibit the dumping or disposal of
 materials including, but not limited to, residential, industrial and commercial
 wastes, trash, used motor vehicle fluids, pesticides, fertilizers, food
 preparation waste, leaf litter, grass clippings, and animal wastes into its MS4;
 and
 - c. authorize fines or penalties and/or recoup costs incurred by the permittee from anyone creating an illicit discharge or spilling or dumping as specified in subsection (3)(A), above. For state and federal institutions, where this provision may conflict with existing rules, regulations, policies, chain of command or other circumstances, alternate provisions for enforcement may be utilized.
 - d. provide any additional legal authorities specified in Section (A)(7)(a) of Appendix B.
 - (ii) Existing 2004 MS4 permittees must establish and implement this legal authority within one year of the effective date of this permit.
 - (iii) New MS4 permittees must establish and implement this legal authority on or before two (2) years of the effective date of this permit.
- (C) Develop a list (spreadsheet or database) and map or series of maps at a minimum scale of 1"=2000' and maximum scale of 1"=100' showing all stormwater discharges from a pipe or conduit located within and owned or operated by the municipality or institution

and all interconnections with other MS4s. The map(s) should, if possible, be developed in a GIS format.

- (i) The list and map(s) shall include for each discharge:
 - a. Type, material, size, and location (identified with a latitude and longitude) of conveyance, outfall or channelized flow (e.g. 24" concrete pipe);
 - b. the name, water body ID and Surface Water Quality Classification of the immediate surface waterbody or wetland to which the stormwater runoff discharges;
 - if the outfall does not discharge directly to a named waterbody, the name and water body ID of the nearest named waterbody to which the outfall eventually discharges;
 - d. the name of the watershed, including the subregional drainage basin number (available from CT ECO at www.cteco.uconn.edu) in which the discharge is located; and
 - e. the spreadsheet or database should, if possible, be prepared in a format compatible with Microsoft Excel.
- (ii) For existing 2004 MS4 permittees, this list and mapping must be completed within two (2) years of the effective date of this permit.
- (iii) For new MS4 permittees, this list and mapping must commence upon the effective date of this permit and be completed within three (3) years from the effective date of this permit. The entirety of the municipal or institutional MS4 shall be mapped by the expiration date of this permit.
- (D) For waters for which **Phosphorus**, **Nitrogen**, or **Bacteria** is a Stormwater Pollutant of Concern:
 - (i) To address septic system failures, the IDDE program shall give highest priority for the IDDE program in areas with the highest potential to discharge bacteria, phosphorus, and nitrogen to the MS4. Such areas shall be identified based on assessment of the following criteria: historic on-site sanitary system failures, proximity to bacteria impaired waters, low infiltrative soils, and shallow groundwater. Consultation with local or state health officials is strongly encouraged. The Annual Report shall include a summary of the program, the number of areas identified with failing systems, actions taken by the permittee to respond to and address the failures, and the anticipated pollutant reduction.
- (E) No requirements in addition to those specified in subsections (A) (C) above exist for discharges to waters for which **Mercury** is a Stormwater Pollutant of Concern.
- (4) Construction Site Stormwater Runoff Control

The permittee shall implement and enforce a program to control stormwater discharges (to its MS4) associated with land disturbance or development (including re-development)

1/20/16

activities from sites (as defined in the Department's General Permit for the Discharge of Stormwater and Dewatering Wastewaters from Construction Activities) with one acre or more of soil disturbance, whether considered individually or collectively as part of a larger common plan. Such program shall include the following elements:

(A) Legal Authority

- (i) The permittee shall establish an ordinance, bylaw, regulation, standard condition of approval or other appropriate legal authority that requires:
 - a. developers, construction site operators, or contractors to maintain consistency with the 2002 Guidelines for Soil Erosion and Sedimentation Control, as amended, the Connecticut Stormwater Quality Manual, and all stormwater discharge permits issued by the DEEP within the municipal or institutional boundary pursuant to CGS 22a-430 and 22a-430b;
 - b. the implementation of additional measures to protect/improve water quality (in addition to the above requirements) as deemed necessary by the municipality or institution;
 - c. the permittee to carry out all inspection, surveillance and monitoring procedures necessary to determine compliance with municipal regulations, ordinances or programs or institutional requirements related to the management of the permittee's MS4. Specifically, inspections shall be conducted, where allowed, to inventory the number of privately-owned retention ponds, detention ponds and other stormwater basins that discharge to or receive drainage from the permittee's MS4;
 - d. the owner of a site seeking development approval from the permittee to provide and comply with a long term maintenance plan and schedule to ensure the performance and pollutant removal efficiency of privately-owned retention ponds, detention ponds and other stormwater basins that discharge to or receive discharge from the permittee's MS4 including short-term and long-term inspection and maintenance measures to be implemented by the private owner; and
 - e. the permittee to control through interagency or inter-jurisdictional agreements, the contribution of pollutants between the permittee's MS4 and MS4s owned or operated by others.
- (ii) For existing 2004 MS4 permittees, within two (2) year from the start of the permittee's first fiscal year that begins after the effective date of this permit, the permittee shall implement, upgrade (if necessary) and enforce its land use regulations to meet the requirements of subsections 4(A)(i)a. e. above.
- (iii) For new MS4 permittees, within three (3) years from the start of the permittee's first fiscal year that begins after the effective date of this permit, the permittee shall implement, upgrade (if necessary) and enforce its land use regulations (for municipalities) or its construction requirements (for institutions) to meet the requirements of Sections 4(A)(i)a. e. above.

(B) Interdepartmental Coordination

- (i) The permittee will develop and implement a plan outlining how all municipal or institutional departments and boards with jurisdiction over the review, permitting, or approval of land disturbance and development projects within the MS4 will coordinate their functions with one another.
- (ii) All municipalities and institutions shall implement this measure upon the effective date of this permit.

(C) Site Review and Inspection

- (i) The permittee will conduct site plan reviews that incorporate consideration of stormwater controls or management practices to prevent or minimize impacts to water quality.
- (ii) The permittee will conduct site inspection(s) and enforcement to assess the adequacy of the installation, maintenance, operation, and repair of construction and post construction control measures.
- (iii) All municipalities and institutions shall implement this measure upon the effective date of this permit.

(D) Public Involvement

- (i) The permittee will implement a procedure for receipt and consideration of information submitted by the public concerning proposed and ongoing land disturbance and development activities.
- (ii) All municipalities and institutions shall implement this procedure upon the effective date of this permit.

(E) State Permit Notification

- (i) The permittee will implement a procedure for notifying developers (working in a municipality) or contractors (working for a municipality or an institution) of their potential obligation to obtain authorization under the DEEP's General Permit for the Discharge of Stormwater and Dewatering Wastewaters Associated with Construction Activities ("construction general permit") if their development or redevelopment project disturbs one or more acres of land, either individually or collectively, as part of a larger common plan, and results in a point source discharge to the surface waters of the state directly or through the permittee's MS4. The notification shall include a provision informing the developer/contractor of their obligation to provide a copy of the Storm Water Pollution Control Plan (required by the construction general permit) to the permittee upon request.
- (ii) All municipalities and institutions shall implement this procedure upon the effective date of this permit.

- (F) For construction discharges to waters for which **Phosphorus**, **Nitrogen**, **Bacteria**, or **Mercury** is a Stormwater Pollutant of Concern no additional measures are included in this section except as may be required by Sections 3(b)(7) or 6(k).
- (5) Post-construction stormwater management in new development or redevelopment

(A) Legal Authority

(i) The permittee shall establish an ordinance, bylaw, regulation, standard condition of approval or other appropriate legal authority that requires, to the MEP, that a developer or contractor seeking the permittee's approval shall consider the use of low impact development ("LID") and runoff reduction site planning and development practices prior to the consideration of other practices in the permittee's land use regulations, guidance or construction project requirements to meet or exceed those LID and runoff reduction practices identified in the Stormwater Quality Manual. Such legal authority shall include the following standards: 1) for redevelopment of sites that are currently developed with Directly Connected Impervious Area (DCIA) of forty percent or more, retain on-site half the water quality volume for the site, or 2) for new development and redevelopment of sites with less than forty percent DCIA, retain the water quality volume for the site, or 3) an alternate retention/treatment standard as outlined in subsections 5(B)(i)-(ii) below. All permittees shall identify and, where appropriate, reduce or eliminate existing local regulatory barriers to implementing LID and runoff reduction practices to the MEP. These may include site planning requirements, zoning regulations, street design regulations, or infrastructure specifications that address minimal dimensional criteria for the creation of roadways, parking lots, and other DCIA. If such barriers cannot be eliminated within the timeframe dictated by subsections 5(A)(ii) and (iii), below, the permittee shall provide in the Annual Report(s) required by Section 6(j) a justification and a revised schedule for implementation.

In establishing the legal authority, the permittee shall consider the following watershed protection elements to manage the impacts of stormwater on receiving waters, except where noted:

- a. Minimize the amount of impervious surfaces (roads, parking lots, roofs, etc.) within each municipality by minimizing the creation, extension, and widening of parking lots, roads, and associated development and encourage the use of Low Impact Development or green infrastructure practices.
- b. Preserve, protect, create and restore ecologically sensitive areas that provide water quality benefits and serve critical watershed functions. These areas may include, but are not limited to; riparian corridors, headwaters, floodplains and wetlands.
- c. Implement stormwater management practices that prevent or reduce thermal impacts to streams, including requiring vegetated buffers along waterways, and disconnecting discharges to surface waters from impervious surfaces such as parking lots.

- d. Seek to avoid or prevent hydromodification of streams and other water bodies caused by development, including roads, highways, and bridges.
- e. Implement standards to protect trees, and other vegetation with important evapotranspirative qualities.
- f. Implement policies to protect native soils, prevent topsoil stripping, and prevent compaction of soils.
- (ii) For existing 2004 MS4 permittees, the permittee shall consider the elements of this section during regular reviews and implement this requirement no later than four (4) years after the effective date of this permit.
- (iii) For new permittees, the permittee shall consider the elements of this section during regular reviews and implement this requirement no later than five (5) years after the effective date of this permit.
- (B) Runoff Reduction/Low Impact Development ("LID") Measures

Pursuant to the requirements of subsection 5(A)(i) above, the permittee shall require the party responsible (i.e. a developer within a municipal boundary or a developer/contractor with the institution) for development and redevelopment projects within its MS4 to:

(i) For development or redevelopment of sites that are currently developed with Directly Connected Impervious Area (DCIA) of forty percent or more, retain onsite half the water quality volume for the site. In cases where this entire amount cannot be retained, the permittee shall require the responsible party to retain runoff volume to the maximum extent achievable using control measures that are technologically available and economically practicable and achievable in light of best industry practice. In such cases, additional stormwater treatment, to the maximum extent achievable using control measures that are technologically available and economically practicable and achievable in light of best industry practice, shall be required for sediment, floatables and nutrients for the volume above that which can be retained up to the water quality volume. In cases where the runoff reduction requirement cannot be met, the developer/contractor shall submit, for the permittee's review, a report detailing factors limiting the capability of achieving this goal. In such cases, the permittee shall approve a stormwater mitigation project on another site proposed by the developer/contractor or approve a fee to be deposited into a dedicated account of the permittee for use by the permittee to fund in whole or in part the retrofit of one or more existing DCIA. Unless such fee is established by DEEP, the fee proposed by the developer/contractor should be set in amount approved by the permittee as calculated based on an estimate of the cost necessary to implement the retrofit to achieve a similar amount of runoff reduction to the amount by which the actual amount of runoff reduced fails to achieve the requirement to retain the water quality volume for the site. The report shall include: the measures taken to maximize runoff reduction practices on the site; the reasons why those practices constitute the maximum extent achievable; the alternative retention volume; and a description of the measures used to provide additional stormwater treatment above

- the alternate volume up to the water quality volume. In the case of linear redevelopment projects (e.g. roadway reconstruction or widening) for the developed portion of the right of way: (1) for projects that may be unable to comply with the full retention standard, the alternate retention and treatment provisions may also be applied as specified above, or (2) for projects that will not increase the DCIA within a given watershed, the developer/contractor shall implement the additional stormwater treatment measures referenced above, but will not be required to retain half of the water quality volume.
- (ii) For all new development and for redevelopment of sites with less than forty percent DCIA, retain the water quality volume for the site. If there are site constraints that would prevent retention of this volume on-site (e.g. brownfields, capped landfills, bedrock, elevated groundwater, etc.), documentation must be submitted, for the permittee's review and written approval, which: explains the site limitations; provides a description of the runoff reduction practices implemented; provides an explanation of why this constitutes the maximum extent achievable; offers an alternative retention volume; and provides a description of the measures used to provide additional stormwater treatment for sediment, floatables and nutrients above the alternate volume up to the water quality volume. In such cases, the permittee shall approve a stormwater mitigation project on another site proposed by the developer/contractor or approve a fee to be deposited into a dedicated account of the permittee for use by the permittee to fund in whole or in part the retrofit of one or more existing DCIA. Unless such fee is established by DEEP, the fee proposed by the developer/contractor should be set in amount approved by the permittee as calculated based on an estimate of the cost necessary to implement the retrofit to achieve a similar amount of runoff reduction to the amount by which the actual amount of runoff reduced fails to achieve the requirement to retain the water quality volume for the site. Any such treatment shall otherwise be designed, installed and maintained consistent with the Stormwater Quality Manual. In the case of linear projects that do not involve impervious surfaces (e.g. electrical transmission rights-of-way or natural gas pipelines), retention of the water quality volume is not required as long as the post-development runoff characteristics do not differ significantly from pre-development conditions.
- (iii) Consider the limitation of turf areas to those areas necessary to construct buildings, utilities, stormwater management measures, parking, access ways, reasonable lawn areas and contouring necessary to prevent future site erosion,
- (iv)Maintain consistency with the Connecticut Stormwater Quality Manual, or if inconsistent, provide an explanation of why consistency is not feasible or practicable and information that the proposed plan of development is adequately protective.
- (v) In areas served by on-site sewage disposal (septic) systems, the permittee should coordinate with the state or local health official, as appropriate, to confirm that any infiltration measures are appropriately sized, located and constructed in a manner consistent with the Connecticut Department of Public Health's Technical Standards for Subsurface Sewage Disposal Systems, Section 19-13-B100A of the Regulations of Connecticut State Agencies and/or DEEP requirements for onsite sewage disposal systems.

- (vi) For existing 2004 MS4 permittees, the permittee shall implement this requirement within two (2) years after the effective date of this permit.
- (vii)For new MS4 permittees, the permittee shall implement this requirement within three (3) years from the start of the permittee's first fiscal year that begins after the effective date of this permit.

(C) Directly Connected Impervious Area

Using mapping provided by the Commissioner (available at www.ct.gov/deep/municipalstormwater) or other equivalent source, the permittee shall calculate the Directly Connected Impervious Area (DCIA) that contributes stormwater runoff to each of its MS4 outfalls (i.e. catchment area) within three (3) years of the effective date of this general permit. The DCIA calculation shall be based upon the criteria available through the DEEP stormwater webpage (www.ct.gov/deep/municipalstormwater) and the precise methodology and assumptions shall be described in the permittee's Plan and initial annual report. Each annual report shall document the progress of this task until its completion. The Permittee shall revise its DCIA estimate as development, redevelopment, or retrofit projects effectively add or remove DCIA to its MS4.

(D) Long Term Maintenance

- (i) The permittee shall implement a maintenance plan for ensuring the long-term effectiveness of retention or detention ponds located in the Urbanized Area and those catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters and which discharge to, or receive stormwater from, its MS4. This shall include such ponds that are owned by the permittee and all privately-owned ponds where the permittee maintains an easement or other legal authority pursuant to Section 6(a)(4)(A)(i) of this permit. At a minimum, the permittee shall annually inspect all such retention or detention ponds and remove accumulated sediment to restore full solids capture design capacity where found to be in excess of 50% design capacity.
- (ii) The permittee shall implement a maintenance plan for ensuring the long-term effectiveness of stormwater treatment structures or measures (such as swirl concentrators, oil/grit separators, water quality wetlands or swales, etc.) installed within the Urbanized Area and those catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters. This shall include structures that are owned by the permittee or those for which the permittee maintains an easement or other legal authority pursuant to Section 6(a)(4)(A)(i) of this permit. At a minimum, the permittee shall annually inspect all such structures/measures and remove accumulated pollutants (such as sediment, oils, leaves, litter, etc.) to restore full solids capture design capacity where found to be in excess of 50% design capacity.
- (iii) For existing 2004 MS4 permittees, the permittee shall implement this requirement within two (2) years of the effective date of this permit.
- (iv) For new MS4 permittees, the permittee shall implement this requirement within three (3) years after the effective date of this permit.

- (E) Additional measures for discharges to impaired waters (with or without a TMDL)
 - (i) For waters for which **Nitrogen, Phosphorus** or **Bacteria** is a Stormwater Pollutant of Concern:

To address erosion and sediment problems noted during the course of conducting the inspections required by subsection D above and identified by other means, the permittee shall develop, fund, implement, and prioritize these problems under the Retrofit program specified in Section 6(a)(6)(B) to correct the problem(s) in a specific timeframe and to establish short term and long term maintenance. Each annual report shall include which problem areas were retrofitted, the cost of the retrofit, and the anticipated pollutant reduction.

(ii) No requirements in addition to those specified in subsections (A)-(D) above exist for discharges to waters for which **Mercury** is a Stormwater Pollutant of Concern.

(6) Pollution Prevention/Good Housekeeping

The permittee shall implement an operations and maintenance program for permitteeowned or –operated MS4s that has a goal of preventing or reducing pollutant runoff and protecting water quality from all permittee-owned or -operated MS4s.

(A) Employee Training

The existing 2004 MS4 permittees shall continue a formal employee training program to increase awareness of water quality related issues in management of its MS4. New MS4 permittees shall develop this program within two (2) years of the effective date of this general permit. In addition to providing key staff with topical training regarding standard operating procedures and other activities necessary to comply with the provisions of this permit, the training program shall include establishing an awareness of the general goals and objectives of the Plan; identification and reporting of illicit discharges and improper disposal; and spill response protocols and respective responsibilities of involved personnel.

- (B) Infrastructure Repair, Rehabilitation and Retrofit
 - (i) The permittee shall repair and rehabilitate its MS4 infrastructure in a timely manner to reduce or eliminate the discharge of pollutants from its MS4 to receiving waters. Priority for repair and rehabilitation shall be based on the following:
 - a. For existing 2004 MS4 permittees, the permittee shall utilize the information developed pursuant to Section 6(a)(6)(A)(v) of the 2004 MS4 permit to fund and implement a program for repairing, retrofitting or upgrading the conveyances, structures and outfalls of the MS4. This program shall be updated based on new information on outfalls discharging pollutants, impaired waters, inspection observations or observations made during outfall mapping pursuant to Section 6(a)(3)(C) of this permit.
 - b. For new MS4 permittees, the permittee shall, within the first three (3) years following the effective date of this general permit, develop a program to

identify conveyances, structures and outfalls in need of repairing, retrofitting or upgrading utilizing new and existing information on outfalls discharging pollutants, impaired waters, inspection observations or observations made during outfall mapping pursuant to Section 6(a)(3)(C) of this permit.

(ii) Retrofit Program

The goal of the retrofit program is to "disconnect" existing Directly Connected Impervious Areas (DCIA). An area of DCIA is considered disconnected when the appropriate portion of the Water Quality Volume has been retained in accordance with the requirements of Section 6(a)(5)(B)(i) or (ii) of this general permit. This may be accomplished through retrofits or redevelopment projects (public or private) that utilize Low Impact Development (LID) and runoff reduction measures or any other means by which stormwater is infiltrated into the ground or reused for other purposes without a surface or storm sewer discharge. A redevelopment project, as that term is used here and in Section 6(a)(5)(B)(i) and (ii), is one that modifies an existing developed site for the purpose of enhancing, expanding or otherwise modifying its function or purpose. A retrofit project is one that modifies an existing developed site for the primary purpose of disconnecting DCIA. The DCIA calculation performed pursuant to Section 6(a)(5)(C) shall serve as the baseline for the retrofit program required in this section.

a. DCIA Disconnection Tracking

Beginning on the effective date of this general permit, the permittee shall track on an annual basis the total acreage of DCIA that is disconnected as a result of redevelopment or retrofit projects within the MS4. Tracking the disconnection of DCIA means documenting within a given redevelopment or retrofit project the amount of existing DCIA that is modified such that it is disconnected. This tracking may include disconnections of DCIA from redevelopment or retrofit projects implemented as early as five (5) years prior to the effective date of this permit. Any redevelopment or retrofit of an existing developed site, whether public (municipal, state or federal) or private (residential, commercial or industrial) shall be included in this tracking.

Tracking the disconnection of DCIA does <u>not</u> apply for sites that were previously undeveloped as there were no existing impervious surfaces on those sites. The total amount of DCIA that has been disconnected during a given year shall be reported in that year's Annual Report.

b. Retrofit Planning

On or before the end of third year after the effective date of this general permit, the permittee shall develop a plan to implement retrofit projects to meet the goals of this section. The permittee shall identify and prioritize sites that may be suitable for retrofit. Considerations for prioritizing retrofit projects may include outfall catchment areas that discharge to impaired waters, areas within the Urbanized Area of the MS4 or catchment areas with greater than eleven percent (11%) DCIA. The permittee shall select from the list of prioritized projects those that it will implement to meet the goals in subparagraph (c) below. In the Annual Report for the third year of this general permit, the

permittee shall report on its identification and prioritization process, the selection of the projects to be implemented, the rationale for the selection of those projects and the total DCIA to be disconnected upon implementation of the projects.

c. Retrofit Schedule

By the end of this permit term, the permittee shall commence the implementation of the retrofit projects identified in subparagraph (b), above, with a goal of disconnecting one percent (1%) per year of the permittee's DCIA for the fourth and fifth years of this general permit, or a total of 2%, to the MEP. The two percent (2%) goal may be achieved by compiling the total disconnected DCIA tracked pursuant to subparagraph (a), above, or the retrofit projects designated in subparagraph (b), above, or a combination of the two.

If the two percent (2%) goal will not be met, the permittee shall include in the Annual Report a discussion of what percentage of DCIA will actually be disconnected and why the remainder of the two percent (2%) goal could not be achieved based on the MEP standard outlined in Section 5(b). The permittee shall also provide in the Annual Report for the fifth year of this permit for continuation of the retrofit program and continue such program with a goal to disconnect one percent (1%) of DCIA in each year thereafter.

(C) MS4 Property and Operations Maintenance

Permittee-owned or -operated properties, parks, and other facilities that are owned, operated, or otherwise the legal responsibility of the permittee shall be maintained so as to minimize the discharge of pollutants to its MS4. Such maintenance shall include, but not be limited to:

(i) Parks and open space

The permittee shall optimize the application of fertilizers by municipal employees, institutional staff, or private contractors on lands and easements for which it is responsible for maintenance. Optimization practices considered may include conducting soil testing and analysis to determine soil phosphorus levels, the reduction or elimination of fertilizers, reduction of usage by adhering to the manufacturers' instructions, and use of alternative fertilizers forms (i.e. products with reduced, slow-releasing, or insoluble phosphorus compositions). Additional optimization practices to be considered include: proper storage and application practices (i.e. avoid impervious surfaces), application schedule (i.e. appropriate season or month) and timing (i.e. coordinated with climatic conditions to minimize runoff potential); develop and implement standard operating practices for the handling, storage, application, and disposal of pesticides and herbicides in compliance with applicable state and federal laws; evaluate lawn maintenance and landscaping activities to promote water quality (protective practices include reduced mowing frequencies, proper disposal of lawn clippings, and use of alternative landscaping materials like drought resistant and native plantings); and establish procedures for management of trash containers at parks (scheduled cleanings; sufficient number).

The permittee shall establish practices for the proper disposal of grass clippings and leaves at permittee-owned lands. Clippings shall be composted or otherwise appropriately disposed. Clippings should not enter the MS4 system or waters of the state.

(ii) Pet waste management

The permittee shall identify locations within its community/institution where inappropriate pet waste management practices are immediately apparent and pose a threat to receiving water quality due to proximity and potential for direct conveyance of waste to its storm system and waters. In such areas, the permittee shall, implement targeted management efforts such as public education and enforcement (e.g. increased patrol for violators). In permittee-owned recreational areas where dog walking is allowed, the permittee shall install educational signage, pet waste baggies, and disposal receptacles (or require carry-out). The permittee shall document its efforts in its annual reports. The permittee should consider including information regarding the scope and extent of its education, compliance, and enforcement efforts (including the number of violations pursued and fines levied or other enforcement taken).

(iii) Waterfowl management

Identify lands where waterfowl congregate and feeding by the public or institutional staff/residents occurs. To raise awareness regarding the water quality impacts, the permittee shall install signage or use other targeted techniques to educate the public about the detrimental impacts of feeding waterfowl (including the resulting feces deposition) and discourage such feeding practices. The permittee shall also implement practices that discourage the undesirable congregation of waterfowl in these areas, or otherwise isolate the direct drainage from these areas away from its storm system and waters.

(iv) Buildings and facilities (schools under the jurisdiction of the permittee, town offices, police and fire stations, pools, parking garages and other permittee-owned or operated buildings or utilities)

Evaluate the use, storage, and disposal of both petroleum and non-petroleum products; ensure, through employee training, that those responsible for handling these products know proper procedures; ensure that Spill Prevention Plans are in place, if applicable, and coordinate with the fire department as necessary; develop management procedures for dumpsters and other waste management equipment; sweep parking lots and keep areas surrounding the facilities clean to minimize runoff of pollutants; and ensure that all interior building floor drains are not connected to the MS4. This permit does not authorize such discharges; wastewaters from interior floor drains must be appropriately permitted.

(v) Vehicles and Equipment

Establish procedures for the storage of permittee-owned or -operated vehicles; require vehicles with fluid leaks to be stored indoors or in contained areas until repaired; evaluate fueling areas owned by the permittee and used by permittee-owned or -operated vehicles and if possible, place fueling areas under cover in

order to minimize exposure; establish procedures to ensure that vehicle wash waters are not discharged to the municipal storm sewer system or to surface waters. This permit does not authorize such discharges; wastewaters from interior floor drains must be appropriately permitted.

(vi) Leaf Management

The permittee shall establish and implement procedures to minimize or prevent the deposition of leaves in catch basins, streets, parking lots, driveways, sidewalks or other paved surfaces that discharge to the MS4. Such procedures shall also apply to leaves collected by the permittee.

(D) Street, Parking & MS4 Maintenance

The permittee shall implement a program to provide for regular inspection and maintenance of permittee-owned or -operated streets, parking areas and other MS4 infrastructure.

(i) Sweeping

a. Establish and implement procedures for sweeping permittee-owned or operated streets and parking lots. All streets and parking lots within the Urbanized Area of the MS4, and outside the Urbanized Area within the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters, shall be inspected, swept and/or cleaned (as necessary) with a minimum frequency of once per year in the spring following the cessation of winter maintenance activities (i.e. sanding, deicing, etc.). The procedures shall also include more frequent inspections, cleaning and/or sweeping of targeted areas determined by the permittee to have increased pollutant potential based on the presence of active construction activity or other potential pollutant sources. The permittee shall identify such potential pollutant sources based upon surface inspections, catch basin cleaning or inspection results, land use, winter road deicing and/or sand application, impaired or TMDL waters or other relevant factors as determined by the permittee. If wet dust suppression is conducted, the use of water should be minimized such that a discharge of excess water to surface waters and/or the storm sewer system does not occur.

For streets and parking lots outside the Urbanized Area and outside the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters, including any rural uncurbed streets and parking lots with no catch basins, the permittee shall either meet the minimum frequencies above, or develop and implement an inspection, documentation and targeted sweeping and/or cleaning plan within one (1) year of the effective date of the general permit, and submit such plan with its year one Annual Report. For new and redeveloped municipal parking lots, evaluate options from reducing stormwater runoff to surface waters and/or the storm sewer system by the installing pervious pavements and/or other measures to promote sheet flow of stormwater.

- b. Ensure the proper disposal of street sweepings in accordance with Department policies, guidance and regulations. Sweepings shall not be discharged back into the storm drain system and/or surface waters.
- c. In its Annual Report, the permittee shall document results of its sweeping program including, at a minimum: a summary of inspection results, curb miles swept, dates of cleaning, volume or mass of material collected, and method(s) of reuse or disposal. The permittee shall also include documentation of any alternate sweeping plan for rural uncurbed streets and any runoff reduction measures implemented.

(ii) Catch Basin Cleaning

The Permittee shall conduct routine cleaning of all catch basins. The Permittee shall track catch basin inspection observations. Utilizing information compiled through its inventory of catch basins, operational staff and public complaints, the Permittee shall optimize routine cleaning frequencies for particular structures or catchment areas as follows to maintain acceptable sediment removal efficiencies:

- a. Inspect all permittee-owned catch basins within the Urbanized Area of the MS4 and outside the Urbanized Area within the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters at least once by the end of the third year following the effective date of this general permit. Catch basins outside the Urbanized Area and outside the catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters shall be inspected by the end of the fifth year following the effective date of this general permit.
- b. Prioritize inspection and maintenance for permittee-owned catch basins located near impaired waters and construction activities (roadway construction, residential, commercial, or industrial development or redevelopment). Clean catch basins in such areas more frequently if inspection and maintenance activities indicate excessive sediment or debris loadings.
- c. Establish a schedule that the frequency of routine cleaning will ensure that no catch basin at any time will be more than fifty (50) percent full.
- d. If a catch basin sump is more than fifty (50) percent full during two consecutive routine inspections/cleaning events, the permittee shall document that finding, investigate the contributing drainage area for sources of excessive sediment loading, and to the maximum extent practicable, abate contributing sources. The permittee shall describe any actions taken in its Annual Report.
- e. For the purposes of this subsection, an excessive sediment or debris loading is a catch basin sump more than fifty (50) percent full. A catch basin sump is more than 50 percent full if the contents within the sump exceed one half the distance between the bottom interior of the catch basin to the invert of the deepest outlet of the catch basin.

- f. The permittee shall document in the Plan and in the first Annual Report its plan for optimizing catch basin cleaning, inspection plans, or its schedule for gathering information to develop the optimization plan. Documentation shall include metrics and other information used to reach the determination that the established plan for cleaning and maintenance is optimal for the MS4. The permittee shall keep a log of catch basins cleaned or inspected.
- g. The permittee shall report in each Annual Report the total number of catch basins, number inspected, number cleaned, the total volume or mass of material removed from all catch basins and, if practicable, the volume or mass of material removed from each catch basin draining to water quality limited waters.

(E) Snow Management Practices

(i) Deicing Material Management

Develop and implement standard operating practices for the use, handling, storage, application, and disposal of deicing products such as salt and sand to minimize exposure to stormwater; consider means to minimize the use and optimize the application of chloride-based or other salts or deicing product (while maintaining public safety) and consider opportunities for use of alternative materials; for any exterior containers of liquid deicing materials installed after the effective date of this permit, provide secondary containment of at least 110% of the largest container or 10% of the total volume of all containers, whichever is larger, without overflow from the containment area.

(ii) Snow and Ice Control Practices

The permittee shall implement and refine its standard operating practices regarding its snow and ice control to minimize the discharge of sand, anti-icing or de-icing chemicals and other pollutants (while maintaining public safety). The permittee shall establish goals for the optimization of sand and/or chemical application rates through the use, where practicable, of automated application equipment (e.g. zero-velocity spreaders), anti-icing and pre-wetting techniques, implementation of pavement management systems, and alternate chemicals. The permittee shall maintain records of the application of sand, anti-icing and/or de-icing chemicals to document the reduction of chemicals to meet established goals. The permittee shall ensure the proper training for deicing applications for municipal employees, institutional staff, or private contractors on lands and easements for which it is responsible for maintenance.

The permittee shall manage and dispose of snow accumulations in accordance with DEEP's Best Management Practices for Disposal of Snow Accumulations from Roadways and Parking Lots, revised 2/4/11 and as amended (see link at: www.ct.gov/deep/stormwater). In its Annual Report, the permittee shall document results of its snow removal program including, at a minimum: the type of staff training conducted on application methods and equipment, type(s) of deicing materials used; lane-miles treated; total amount of each deicing material used; type(s) of deicing equipment used; any changes in deicing practices (and the reasons for the change); and snow disposal methods.

(F) Interconnected MS4s

As part of interagency agreements established pursuant to Section 6(c)(3) of this permit, the Permittee shall coordinate with operators of interconnected MS4s (such as neighboring municipalities, institutions and DOT) regarding the contribution of potential pollutants from the storm sewer systems, contributing land use areas and stormwater control measures in the respective MS4s. This same coordination shall be conducted regarding operation and maintenance procedures utilized in the respective systems.

(G) Sources contributing pollutants to the MS4

The permittee shall develop and implement a program to control the contribution of pollutants to its MS4 from commercial, industrial, municipal, institutional or other facilities, not otherwise authorized by permit issued pursuant to Sections 22a-430 or 22a-430b of the Connecticut General Statutes.

- (H) Additional measures for discharges to impaired waters (with or without a TMDL)
 - (i) For waters for which **Nitrogen** or **Phosphorus** is a Stormwater Pollutant of Concern:

On Permittee-owned or -operated lands, implement a turf management practices and procedures policy which includes, but is not limited to, procedures for proper fertilizer application and the planting of native plant materials to lessen the amount of turf area requiring mowing and the application of chemicals. Each Annual Report shall discuss the actions taken to implement this policy with an estimate of fertilizer and turf reduction.

(ii) For waters for which **Bacteria** is a Stormwater Pollutant of Concern:

On Permittee-owned or -operated lands with a high potential to contribute bacteria (such as dog parks, parks with open water, sites with failing septic systems), the permittee shall develop, fund, implement, and prioritize a retrofit or source management program to correct the problem(s) within a specific timeframe. Each Annual Report shall identify problem areas for which a retrofit or source management program were developed, the location of the closest outfall monitored in accordance with Section 6(i), the cost of such retrofit or program, and the anticipated pollutant reduction.

On Permittee-owned or -operated lands, prohibit the feeding of geese or waterfowl and implement a program to manage geese and waterfowl populations. Each Annual Report shall discuss the actions taken to implement this program.

(iii) No additional requirements in addition to those specified in subsections (A)-(C) above exist for discharges to waters for which **Mercury** is a Stormwater Pollutant of Concern.

(b) Sharing Responsibility

(1) Qualifying Local Program

The permittee may satisfy the requirement to implement a BMP for a Minimum Control Measure by having a third party implement the BMP.

When a permittee is relying on a third party to implement one or more BMP(s), the permittee shall note that fact in the registration and Annual Report required in Section 6(j), below. If the third party fails to implement the BMP(s), the permittee remains responsible for its implementation.

(Note: For example, if a local watershed organization performs an annual "river clean-up", this event may be used to satisfy a BMP for the Public Participation and/or the Pollution Prevention and Good Housekeeping Minimum Control Measure.)

(2) Qualifying State or Federal Program

If a BMP or Minimum Control Measure is the responsibility of a third party under another NPDES stormwater permit, the permittee is not required to include such BMP or Minimum Control Measure in its Stormwater Management Plan. The permittee shall reference this qualifying program in their Stormwater Management Plan. However, the permittee is not responsible for its implementation if the third party fails to perform. The permittee shall periodically confirm that the third party is still implementing this measure. If the third party fails to implement the measure, the Stormwater Management Plan may be modified to address the measure, if necessary.

In the case of a permitted municipal industrial activity that is covered by the General Permit for the Discharge of Stormwater Associated with Industrial Activity, the permittee may reference the activity's Stormwater Pollution Prevention Plan to address a portion of the permittee's Stormwater Management Plan.

(Note: For example, the permittee may reference a regional mall's requirement to perform sweeping and catch basin cleaning under the General Permit for the Discharge of Stormwater Associated with Commercial Activity. This third party action may be used to address a portion of the permittee's requirement under the Good Housekeeping and Pollution Prevention Minimum Control Measure.)

(3) Coordination of Permit Responsibilities

Where a portion of the separate storm sewer system within a municipality is owned or otherwise the responsibility of another municipality, institution or a state or federal agency the entities shall coordinate the development and implementation of their respective Stormwater Management Plans to address all the elements of Section 6. A description of the respective responsibilities for these elements shall be included in the Stormwater Management Plan for each municipality.

(Note: For example, a storm sewer system within a municipality may be operated and maintained by the DOT. In cases such as these, the two entities shall coordinate their Stormwater Management Plans to address the Minimum Control Measures, particularly at the interface between the two storm sewer systems.)

(4) Co-Permitting

When a municipal Regulated Small MS4s is co-located within the corporate boundary of another Regulated Small MS4, the two may, at their discretion, submit a single registration and share a single Plan as co-permittees. In such a case, the Plan shall clearly indicate which co-permittee is responsible for implementing each of the control measures and other elements of the Plan.

(Note: This provision currently applies only to the City of Groton within the Town of Groton and the Borough of Stonington within the Town of Stonington.)

(c) Proper Operation and Maintenance

The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control, including related appurtenances, which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance includes adequate laboratory controls and appropriate quality assurance procedures. Proper operation and maintenance requires the operation of backup or auxiliary facilities or similar systems, installed by a permittee when necessary to achieve compliance with this permit.

(d) Signature Requirements

The Plan shall be signed by the chief elected official or principal executive officer, as those terms are defined in Section 22a-430-3(b)(2) of the Regulations of Connecticut State Agencies. The Plan shall be retained by the chief elected official or principal executive officer and copies retained by MS4 officials or employees responsible for implementation of the Plan.

(e) Plan Review Fee

When submitting a Stormwater Management Plan as requested by the Commissioner pursuant to Section 6(f), below, the permittee shall submit a plan review fee of \$375.

(f) Keeping Plans Current

The permittee shall amend the Plan whenever; (1) there is a change which has the potential to cause pollution of the waters of the state; or (2) the actions required by the Plan fail to prevent pollution of the waters of the state or fail to otherwise comply with any other provision of this general permit; or (3) the Commissioner requests modification of the Plan. The amended Plan shall be completed and all actions required by such Plan shall be completed within a time period determined by the Commissioner.

The Commissioner may notify the permittee in writing at any time that the Plan does not meet one or more of the requirements of this general permit. Within thirty (30) days of such notification, unless otherwise specified by the Commissioner in writing, the permittee shall respond to the Commissioner indicating how they plan to modify the Plan to address these requirements. Within ninety (90) days of this response or within one hundred twenty (120) days of the original notification, whichever is less, unless otherwise specified by the Commissioner in writing, the permittee shall then revise the Plan, perform all actions required by the revised Plan, and shall certify to the Commissioner that the requested changes have been

made and implemented. The permittee shall provide such information as the Commissioner requires to evaluate the Plan and its implementation. If at any time the Commissioner finds that the Plan is not adequate to protect the waters of the state from pollution, the Commissioner may terminate authorization under this permit and require the permittee to submit an individual permit application.

(g) Failure to Prepare or Amend Plan

In no event shall failure to complete or update a Plan in accordance with Sections 5(b) and 6 of this general permit relieve a permittee of responsibility to implement actions required to protect the waters of the state and to comply with all conditions of this general permit.

(h) Plan Review Certification

A copy of the Plan review certification made in accordance with Section 3(b)(9) shall be maintained with the Plan.

(i) Monitoring Requirements

All permittees shall comply with the screening and monitoring requirements in this subsection.

(1) Impaired Waters Outfall Investigation and Monitoring

Regulated Small MS4s that discharge to impaired waters, as identified in Section 6(k) below, must create an inventory of all outfalls that discharge to impaired waters utilizing the list and mapping prepared pursuant to Section 6(a)(3)(C). The permittee shall then screen these outfalls for the pollutant identified as the pollutant of concern for the impairment in accordance with the following procedures. If the permittee has wet weather sampling data for an outfall pursuant to their sampling conducted under the 2004 MS4 permit or other appropriate wet weather sampling, they may use that data for their outfall screening and will not be required to screen that outfall under this general permit.

(A) Outfall Screening for Phosphorus and Nitrogen

The permittee shall screen outfalls from the MS4 identified in Section 6(a)(3)(C) that discharge to impaired waters for which phosphorus or nitrogen is the pollutant of concern. The permittee may take a sample at the outfall during any rain event that results in a discharge from the outfall in accordance with subsection (2), below. This screening shall be conducted for all such outfalls at least once during the term of this general permit in accordance with subparagraphs (i) and (ii) below.

(i) Nitrogen Screening

The permittee may use a portable nitrogen meter to take a field reading during the wet weather discharge. If the nitrogen reading exceeds the following threshold, the outfall shall be identified for follow-up investigation pursuant to subsection (D) below.

Total Nitrogen > 2.5 mg/l

(ii) Phosphorus Screening

The permittee may use a portable phosphorus meter to take a field reading during the wet weather discharge. If the phosphorus reading exceeds the following threshold, the outfall shall be identified for follow-up investigation pursuant to subsection (D) below.

Total Phosphorus > 0.3 mg/l

(B) Outfall Screening for Bacteria

The permittee shall screen outfalls from the MS4 that discharge to impaired waters for which bacteria is the pollutant of concern. The permittee may take a sample at the outfall during any rain event that results in a discharge from the outfall in accordance with subsection (2), below. The sample shall be analyzed for the following:

- E. coli and Total Coliform (col/100ml) (for discharges to Class AA, A and B surface waters)
- Fecal coliform and Enterococci (col/100ml) (for discharges to Class SA and SB surface waters)

The outfall shall be identified for follow-up investigation pursuant to subsection (D) below if any of the following conditions apply:

- E. coli >235 col/100ml for swimming areas and >410 col/100ml for all others, or
- Total Coliform >500 col/100ml, or
- Fecal coliform >31 col/100ml for Class SA and >260 col/100ml for Class SB, or
- Enterococci >104 col/100ml for swimming areas and >500 col/100ml for all others.

If the permittee can document that bacteria levels at an outfall that exceed these levels are solely the result of natural sources of bacteria, they are not required to conduct a follow-up investigation for that outfall. Natural sources may include wildlife or runoff from undeveloped wooded areas but do not include pet waste or waterfowl congregating at parks, ponds or other attractive nuisance areas.

(C) Outfall Screening for Other Pollutants of Concern

The permittee shall screen outfalls from the MS4 identified in Section 6(a)(3)(C) that discharge to impaired waters for which pollutants other than phosphorus, nitrogen or bacteria are listed as the pollutant of concern. The permittee shall take a sample at the outfall and in-stream immediately upstream or otherwise outside the influence of the outfall. The sample may be taken during any rain event that results in a discharge from the outfall in accordance with subsection (2), below. These samples shall be analyzed for turbidity. The permittee may use a field turbidity meter for these analyses. If the

outfall sample is more than 5 NTU greater than the in-stream sample, the outfall shall be identified for follow-up investigation pursuant to subsection (D) below.

(D) Follow-up Investigations

The permittee shall conduct follow-up investigations for the drainage areas associated with the outfalls identified as potentially contributing to an impairment as a result of the analyses conducted pursuant to subsections (A) - (C), above.

(i) Drainage Area Investigation

The permittee shall investigate activities within the drainage area contributing to each outfall identified for follow-up investigation pursuant to subsections (A) – (C), above. This investigation shall include factors potentially associated with the cause of the related stream impairment. Such factors may include: land use or development patterns; business or commercial activities; industrial activities; DCIA; natural contributors; potential MS4 maintenance issues; residential activities; and any other activities identified by the permittee as potentially contributing to the related impairment.

(ii) Control Measure Implementation

In each outfall drainage area identified for follow-up investigation pursuant to subsections (A) – (C), above, the permittee shall implement a BMP program focusing on the impaired waters provisions of each of the Control Measures in Section 6(a) of this general permit and on the findings of the drainage area investigation in subparagraph (i), above.

(iii) Prioritized Outfall Monitoring

Once outfall screening has been completed for at least half of the outfalls identified pursuant to this section, the permittee shall utilize the screening results to select six (6) of the highest contributors of any of the pollutants of concern. These six outfalls shall be sampled annually for the appropriate pollutant of concern in accordance with the schedule in subsection (E), below. If more than one pollutant of concern is identified for any monitored outfall (i.e. more than one impairment), all of these pollutants shall be monitored. If fewer than six outfalls were identified for follow-up investigation, all of these outfalls shall be monitored, but no more than six.

(E) Schedule

(i) Impaired Waters Discharge Mapping

Inventory and mapping of discharges to impaired waters prepared pursuant to this section shall be completed within two (2) years from the effective date of this general permit for existing 2004 MS4 permittees and within three (3) years from the effective date of this general permit for new MS4 permittees.

(ii) Outfall Screening

Outfall screening pursuant to subsections (A) - (C) shall begin within one (1) year of the effective date of this general permit for existing 2004 MS4 permittees and two (2) years for new MS4 permittees. At least fifty percent (50%) of these outfalls shall be screened no later than the end of the third year following the effective date of this general permit for existing 2004 MS4 permittees and no later than the end of the fourth year for new MS4 permittees. All such outfalls shall be screened by the end of the term of this general permit (5 years).

(iii) Follow-up Investigations

The permittee shall commence follow-up investigations identified pursuant to subsection (D), above, no later than two (2) years following the effective date of this general permit for existing 2004 MS4 permittees and three (3) years for new MS4 permittees.

(iv) Prioritized Outfall Monitoring

The permittee shall commence annual monitoring of the six outfalls identified pursuant to subsection (D)(iii), above, no later than beginning of the fourth year following the effective date of this general permit for existing 2004 MS4 permittees and no later than the beginning of the fifth year for new MS4 permittees.

(F) Reporting

The permittee shall report on the progress of their impaired waters investigation and monitoring program in their Annual Report beginning in the second year following the effective date of this general permit. The report shall include a listing of the outfalls screened during the year, the number of outfalls identified for follow-up investigation, the progress of drainage area investigations, a description of the control measure implementation for the different impairments, identification of the six outfalls to be monitored, and the results of the prioritized outfall monitoring.

(2) Stormwater Monitoring Procedures

(A) Wet Weather Outfall Monitoring

Samples shall be collected from discharges resulting from any rain storm that produces a discharge from the outfall(s) being monitored and that occurs at least 48 hours after any previous rain storm that produced a discharge from the outfall. Runoff events resulting from snow or ice melt alone cannot be used to meet these monitoring requirements. However, monitoring may be conducted during a rain event that may include insignificant amounts of snow or ice melt. Monitoring shall consist of a single grab sample taken within the first six (6) hours of discharge from the outfall.

(B) Rain Event Information

The following information shall be collected for the rain events during which monitoring is conducted:

- (i) The date, temperature, time of the start of the discharge, time of sampling, and magnitude (in inches) of the rain event sampled.
- (ii) The duration between the rain event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) rain event.

(C) Test Procedures

Unless otherwise specified in this permit, all pollutant parameters shall be tested according to methods prescribed in Title 40, CFR, Part 136 (1990). Laboratory analyses must be consistent with Connecticut Reasonable Confidence Protocols.

(j) Reporting & Record Keeping Requirements

(1) The permittee shall keep records required by this permit for at least 5 years following its expiration or longer if requested by the Commissioner in writing. Such records, including the Stormwater Management Plan, shall be available to the public at reasonable times during regular business hours.

(2) Annual Report

By April 1 of the second year following the effective date of this general permit and annually thereafter by April 1, the permittee shall submit an Annual Report for the preceding calendar year electronically to the Department. The DEEP MS4 stormwater webpage (www.ct.gov/deep/municipalstormwater) will provide guidance on Annual Report submittal. The Annual Report must be in Microsoft Word[©], Adobe Acrobat[©] or other format acceptable to the Commissioner. In the event that electronic submission is not available or possible, please contact the Stormwater Section at (860) 424-3025.

The report shall include:

- (A) The Annual Report review fee is \$375.00.
 - (i) The fees for municipalities shall be half of those indicated above pursuant to section 22a-6(b) of the Connecticut General Statutes. State and Federal agencies shall pay the full fees specified in this subsection.
- (B) A written discussion of the status of compliance with this general permit including, but not limited to:
 - (i) a listing and brief description (including, where appropriate, the address or latitude and longitude) of all BMPs within each Minimum Control Measure;
 - (ii) any reporting requirements enumerated in the controls measures sections 6(a) and its subsections;
 - (iii) an implementation schedule for each BMP and an indication of whether or not the BMP or any portion of the BMP was scheduled to be implemented during the year covered by the Annual Report;

- (iv) the status of implementation for each BMP scheduled to be completely or partially implemented during the year covered by the Annual Report, including an assessment of the appropriateness of the BMP and progress towards achieving the implementation dates and measurable goals for that BMP;
- (v) for any portion of a BMP implementation scheduled for the year covered by the Annual Report that was not completed as scheduled, a discussion of the circumstances and reasons for non-implementation, a modified implementation schedule, and, if necessary, a modified or alternate BMP to replace the BMP not implemented including the rationale for such modification or alternate BMP;
- (vi) the overall status of each of the six categories of the Minimum Control Measures and a discussion of the effectiveness of each category in achieving its goals;
- (vii) a discussion of any changes to personnel responsible for the Plan or BMP implementation;
- (viii) a description of any new BMPs added to the Plan during the year including a description of the BMP, the reason or rationale for adding the BMP, the timeline for implementation, the party responsible for implementation and the measurable goal for the BMP and, where appropriate, the location for each BMP, including the address and latitude and longitude;
- (ix) a discussion of the progress and status of the MS4's IDDE program (see Section 6(a)(3)) including outfall screening, mapping, drainage area evaluation and prioritization, illicit discharge tracking activities, IDDP field monitoring results, number and type of illicit discharges detected, and number of illicit discharges eliminated;
- (x) a discussion of measures included in the Plan for the control of discharges to impaired waters (see Section 6(k) below) including a list of BMPs in the Minimum Control Measures that are targeted for such discharges, progress in implementing these measures, any evaluation of the effectiveness of these measures in meeting the goals of the Plan's impaired waters program, and any new or modified BMPs to be added to the Plan to improve its effectiveness;
- (xi) a discussion of the MS4's stormwater monitoring program describing the status of monitoring for the year of the report, the overall status of the monitoring program, a summary of the findings, any significant observations regarding the results, any modifications to the Plan as a result of the monitoring results; and
- (xii) a discussion of any planned BMP implementation in the coming year, including a discussion of any new or modified BMPs planned for future implementation.
- (C) All monitoring data collected and analyzed pursuant to Section 6(i).
- (D) All other information collected and analyzed, including data collected under the Illicit Discharge Detection Protocol (Appendix B), during the reporting period.

(k) Discharges to Impaired Waters or Water bodies subject to a Pollutant Load Reduction within a TMDL

MS4s that discharge to impaired waters (with or without a TMDL), waters for which nitrogen, phosphorus, bacteria or mercury are stormwater pollutants of concern, or waters which have pollution load reductions specified within a TMDL are required to meet certain criteria identified in this section and other sections of this general permit.

(1) Existing Discharge to an Impaired Water without an Established TMDL

If the permittee discharges to an impaired water without an established TMDL, the permittee must follow:

- (A) For waters for which Phosphorus, Nitrogen, Bacteria, or Mercury are stormwater pollutants of concern, the control measures in Section 6(a) and the screening and monitoring requirements of Section 6(i)(1),
- (B) For all other impairments, implement control measures to reduce the discharge of the pollutant(s) associated with the impairment and follow the requirements of Section 6(i)(1)(C), or as directed by the Commissioner.
- (2) Existing Discharge to a Water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL

If the permittee discharges to a water included in a TMDL, the permittee must follow:

- (A) For waters for which Phosphorus, Nitrogen, Bacteria, or Mercury is a stormwater pollutant of concern, the control measures in Section 6(a) and the screening and monitoring requirements of Section 6(i)(1),
- (B) For all other discharges subject to a pollutant load reduction contained within a TMDLs, implement control measures to be consistent with the Waste Load Allocation in the specific TMDL. The permittee must also conduct the appropriate screening and monitoring in accordance with Section 6(i)(1).
- (C) The permittee shall implement BMPs as necessary to achieve the Waste Load Allocation, Load Allocation or Water Quality Targets specified within the TMDL (see Appendix D).
- (3) New Discharge to an Impaired Water without an Established TMDL

If a new discharge to an impaired water without a TMDL is authorized pursuant to the conditions of Section 3(b)(7), the permittee must implement and maintain any control measures or conditions on the site that enabled such authorization, and modify such measures or conditions as necessary to maintain such authorization. The permittee must also maintain compliance with this subsection and Section 6(i) and maintain documentation of these measures and conditions in their Plan.

(4) New Discharge to a Water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL

If a new discharge to a water with a TMDL or with a pollutant load reduction established within the TMDL is authorized pursuant to the conditions of Section 3(b)(7), the permittee must follow the discharge requirements consistent with the applicable Wasteload Allocations, Load Allocations or Water Quality Targets for that TMDL. The permittee must also conduct the appropriate screening and monitoring in accordance with Section 6(i)(1) and maintain documentation of these measures and conditions in their Plan.

Section 7. Additional Requirements of this General Permit

(a) Regulations of Connecticut State Agencies Incorporated into this General Permit

The permittee shall comply with all laws applicable to the subject discharges, including but not limited to, the following Regulations of Connecticut State Agencies which are hereby incorporated into this general permit, as if fully set forth herein:

(1) Section 22a-430-3:

Subsection (b) General - subparagraph (1)(D) and subdivisions (2), (3), (4) and (5)

Subsection (c) Inspection and Entry

Subsection (d) Effect of a Permit - subdivisions (1) and (4)

Subsection (e) Duty to Comply

Subsection (f) Proper Operation and Maintenance

Subsection (g) Sludge Disposal

Subsection (h) Duty to Mitigate

Subsection (i) Facility Modifications, Notification - subdivisions (1) and (4)

Subsection (j) Monitoring, Records and Report Requirements - subdivisions (1), (6), (7),

(8), (9) and (11) (except subparagraphs (9) (A) (2) and (9) (c)

Subsection (k) Bypass

Subsection (m) Effluent Limitation Violations

Subsection (n) Enforcement

Subsection (p) Spill Prevention and Control

Subsection (q) Instrumentation, Alarms, Flow Recorders

Subsection (r) Equalization

(2) Section 22a-430-4

Subsection (t) Prohibitions

Subsection (p) Revocation, Denial, Modification

Appendices

(b) Reliance on Registration

In evaluating the permittee's registration, the Commissioner has relied on information provided by the permittee. If such information proves to be false or incomplete, the permittee's authorization may be suspended or revoked in accordance with law, and the Commissioner may take any other legal action provided by law.

(c) Duty to Correct and Report Violations

Upon learning of a violation of a condition of this general permit, a permittee shall immediately take all reasonable action to determine the cause of such violation, correct and mitigate the results of such violation and prevent further such violation. The permittee shall report in writing such violation and such corrective action to the Commissioner within five (5) days of the permittee's learning of such violation. Such information shall be filed in accordance with the certification requirements prescribed in Section 7(e) of this general permit.

(d) Duty to Provide Information

If the Commissioner requests any information pertinent to the authorized activity or to compliance with this general permit or with the permittee's authorization under this general permit, the permittee shall provide such information within thirty (30) days of such request. Such information shall be filed in accordance with the certification requirements prescribed in Section 7(e) of this general permit.

(e) Certification of Documents

Any document, including but not limited to any notice, information or report, which is submitted to the Commissioner under this general permit shall be signed by the chief elected official or principal executive officer of the municipality or institution, and by the individual or individuals responsible for actually preparing such document, each of whom shall certify in writing as follows:

"I have personally examined and am familiar with the information submitted in this document and all attachments thereto, and I certify that, based on reasonable investigation, including my inquiry of those individuals responsible for obtaining the information, the submitted information is true, accurate and complete to the best of my knowledge and belief. I understand that a false statement made in this document or its attachments may be punishable as a criminal offense, in accordance with Section 22a-6 of the Connecticut General Statutes, pursuant to Section 53a-157b of the Connecticut General Statutes, and in accordance with any other applicable statute."

(f) Date of Filing

For purposes of this general permit, the date of filing with the Commissioner of any document is the date such document is received by the Commissioner. The word "day" as used in this general permit means the calendar day; if any date specified in the general permit falls on a Saturday, Sunday, or legal holiday, such deadline shall be the next business day.

(g) False Statements

Any false statement in any information submitted pursuant to this general permit may be punishable as a criminal offense, in accordance with Section 22a-6, under Section 53a-157b of the Connecticut General Statutes.

(h) Correction of Inaccuracies

Within fifteen days after the date the permittee becomes aware of a change in any information in any material submitted pursuant to this general permit, or becomes aware that any such information is inaccurate or misleading or that any relevant information has been omitted, the permittee shall correct the inaccurate or misleading information or supply the omitted

information in writing to the Commissioner. Such information shall be filed in accordance with the certification requirements prescribed in Section 7(e) of this general permit.

(i) Other Applicable Law

Nothing in this general permit shall relieve the permittee of the obligation to comply with any other applicable federal, state and local law, including but not limited to the obligation to obtain any other authorizations required by such law.

(j) Other Rights

This general permit is subject to and does not derogate any present or future rights or powers of the State of Connecticut and conveys no rights in real or personal property nor any exclusive privileges, and is subject to all public and private rights and to any federal, state, and local laws pertinent to the property or activity affected by such general permit. In conducting any activity authorized hereunder, the permittee may not cause pollution, impairment, or destruction of the air, water, or other natural resources of this state. The issuance of this general permit shall not create any presumption that this general permit should or will be renewed.

Section 8. Commissioner's Powers

(a) Abatement of Violations

The Commissioner may take any action provided by law to abate a violation of this general permit, including but not limited to penalties of up to \$25,000 per violation per day under Chapter 446k of the Connecticut General Statutes, for such violation. The Commissioner may, by summary proceedings or otherwise and for any reason provided by law, including violation of this general permit, revoke a permittee's authorization hereunder in accordance with Sections 22a-3a-2 through 22a-3a-6, inclusive, of the Regulations of Connecticut State Agencies. Nothing herein shall be construed to affect any remedy available to the Commissioner by law.

(b) General Permit Revocation, Suspension, or Modification

The Commissioner may, for any reason provided by law, by summary proceedings or otherwise, revoke or suspend this general permit or modify to establish any appropriate conditions, schedules of compliance, or other provisions which may be necessary to protect human health or the environment.

(c) Filing of an Individual Application

If the Commissioner notifies a permittee in writing that such permittee shall obtain an individual permit under Section 22a-430 of the Connecticut General Statutes if he wishes to continue lawfully conducting the authorized activity, the permittee shall file an application for an individual permit within thirty (30) days of receiving the Commissioner's notice, or at such other date as the Commissioner may allow. While such application is pending before the Commissioner, the permittee shall comply with the terms and conditions of this general permit and the subject approval of registration. If the Commissioner issues an individual permit to a permittee under this general permit, this general permit, as it applies to such permittee, shall automatically terminate on the date such individual permit is issued. Nothing herein shall affect the Commissioner's power to revoke a permittee's authorization under this general permit at any time.

Issued Date:	January 20, 2016	Michael Sullivan
		Deputy Commissioner

This is a true and accurate copy of the general permit executed on January 20, 2016 by the Department of Energy and Environmental Protection.

Appendix A – Small MS4 Municipalities

Connecticut Municipalities with >1,000 People in Urbanized Areas			
Ansonia	Avon	Beacon Falls	
Berlin	Bethany	Bethel	
Bloomfield	Bolton	Branford	
Bridgeport	Bristol	Brookfield	
Brooklyn*	Burlington	Canton	
Cheshire	Chester	Clinton	
Cromwell	Danbury	Darien	
Deep River	Derby	Durham	
East Granby	East Hartford	East Haven	
East Lyme	East Windsor	Easton	
Ellington	Enfield	Essex	
Fairfield	Farmington	Glastonbury	
Granby	Greenwich	Griswold	
Groton (City)	Groton (Town)	Guilford	
Haddam*	Hamden	Hartford	
Hebron	Killingly*	Ledyard	
Lisbon	Madison	Manchester	
Marlborough	Meriden	Middlebury	
Mansfield*	Middlefield	Middletown	
Milford	Monroe	Montville	
Naugatuck	New Britain	New Canaan	
New Fairfield	New Hartford*	New Haven	
New London	New Milford	Newington	
Newtown	North Branford	North Haven	
Norwalk	Norwich	Old Lyme	
Old Saybrook	Orange	Oxford	
Plainfield*	Plainville	Plymouth	
Portland	Prospect	Putnam	
Redding	Ridgefield	Rocky Hill	
Seymour	Shelton	Simsbury	
Somers	South Windsor	Southbury	
Southington	Sprague*	Stonington (Town & Borough)	
Stratford	Suffield	Thomaston	
Thompson	Tolland	Trumbull	
Vernon	Wallingford	Waterbury	
Waterford	Watertown	West Hartford	
West Haven	Westbrook	Weston	
Westport	Wethersfield	Wilton	
Willington*	Windsor	Windsor Locks	
Wolcott	Woodbridge	Woodbury	

^{*} Designates New MS4 Permittees

Appendix B Illicit Discharge Detection and Elimination (IDDE) Program Protocol

(A) Illicit Discharge Detection and Elimination (IDDE) Program

Objective: The permittee shall implement an IDDE program to systematically find and eliminate sources of non-stormwater discharges to its MS4 and implement procedures to prevent such discharges.

During the development of the new components of the IDDE program required by this permit, permittees previously authorized by the permit issued January 9, 2004 must continue to implement their existing IDDE program required by that permit to detect and eliminate illicit discharges to their MS4.

(1) Definitions and Prohibitions

The permittee shall prohibit illicit discharges and sanitary sewer overflows (SSOs) to its MS4 and require removal of such discharges consistent with subsections (2) and (4), below.

An SSO is a discharge of untreated sanitary wastewater from a municipal sanitary sewer.

An illicit discharge is any discharge to an MS4 that is not composed entirely of stormwater, except:

- (a) discharges authorized under a separate NPDES permit that authorize a discharge to the MS4
- (b) non-stormwater discharges allowed by Section 3(a)(2) of this general permit

(2) Elimination of Illicit Discharges

- (a) Upon detection, the permittee shall eliminate illicit discharges as soon as possible and require the immediate cessation of such discharges upon confirmation of responsible parties in accordance with its enforceable legal authorities established pursuant to subsection (B) below. Where elimination of an illicit discharge within sixty (60) days of its confirmation is not possible, the permittee shall establish a schedule for its elimination not to exceed 180 days (six (6) months). The permittee shall immediately commence actions necessary for elimination. The permittee shall diligently pursue elimination of all illicit discharges. In the interim, the permittee shall take all reasonable and prudent measures to minimize the discharge of pollutants to its MS4.
- (b) The period between identification and elimination of an illicit discharge is not a grace period. Discharges from an MS4 that are mixed with an illicit discharge are not authorized by this general permit, are unlawful, and remain unlawful until eliminated.

(3) Non-Stormwater Discharges

The permittee may presume that the sources of non-stormwater listed in Section 3(a)(2) of this permit need not be addressed. However, if the permittee identifies any of these sources as significant contributors of pollutants to the MS4, then the permittee shall implement measures to control these sources so they are no longer significant contributors of pollutants, and/or eliminate them entirely, consistent with this appendix.

1

(4) Sanitary Sewer Overflows

- (a) Upon detection of an SSO the permittee shall eliminate it as expeditiously as possible and take interim mitigation measures to minimize the discharge of pollutants to and from its MS4 until elimination is completed.
- (b) The permittee shall identify all known locations where SSOs have discharged to the MS4 within the previous five years. This shall include SSOs resulting, during dry or wet weather, from inadequate conveyance capacities, or where interconnectivity of the storm and sanitary sewer infrastructure allows for communication of flow between the systems. Within 120 days of the effective date of the permit, the permittee shall develop an inventory of all identified SSOs indicating:
 - Location (approximate street crossing/address and receiving water, if any);
 - A clear statement of whether the discharge entered a surface water directly or entered the MS4;
 - Date(s) and time(s) of each known SSO occurrence (i.e. beginning and end of any known discharge);
 - Estimated volume(s) of the occurrence;
 - Description of the occurrence indicating known or suspected cause(s);
 - Mitigation and corrective measures completed with dates implemented; and
 - Mitigation and corrective measures planned with implementation schedules.

The permittee shall maintain the inventory as a part of the Plan and update the inventory annually.

- (c) The permittee shall provide written notice to the Commissioner within five (5) days of becoming aware of the SSO occurrence and shall include the information in the updated inventory. The notice shall contain all of the information listed in subsection (b), above.
- (d) The permittee shall include and update the SSO inventory in its annual report, including the status of mitigation and corrective measures implemented by the permittee to address each SSO identified pursuant to this appendix.
- (e) The period between identification and elimination of a discharge from the SSO to the MS4 is not a grace period. Discharges from an MS4 that are mixed with an SSO are not authorized by this general permit, are unlawful and remain unlawful until eliminated.

(5) Outfall/Interconnection Inventory

The permittee shall develop an outfall and interconnection inventory that identifies each outfall and interconnection discharging from the MS4, records its location and condition, and provides a framework for tracking inspections, screenings and other activities under the permittee's IDDE program pursuant to Section 6(a)(3) of this general permit.

(a) An outfall means a point source as defined by 40 CFR § 122.2 and in Section 2 of this general permit as the point where the MS4 discharges to waters of the state. An outfall does not include open conveyances connecting two separate storm sewers or pipes, tunnels or other conveyances that connect segments of the same stream or other waters of the state and that are used to convey waters of the state. However, it is strongly recommended that a permittee inspect all

accessible portions of the system as part of this process. Culverts longer than a simple road crossing shall be included in the inventory unless the permittee can confirm that they are free of any connections and simply convey waters of the state.

An interconnection means the point where the permittee's MS4 discharges to another MS4 or other storm sewer system, through which the discharge is conveyed to waters of the state or to another storm sewer system and eventually to a water of the state.

- (b) The permittee shall complete its outfall and interconnection inventory in accordance with the timelines in Sections 6(a)(3)(C)(ii) and (iii) and shall include the progress of this inventory in each annual report. The inventory shall be updated annually to include data collected in connection with the dry weather screening under subsection (7(d)), below, and other relevant inspections conducted by the permittee.
- (c) The inventory shall include the following information: unique identifier, receiving water, date of most recent inspection, dimensions, shape, material (concrete, PVC), spatial location (latitude and longitude with a minimum accuracy of +/-30 feet, physical condition and indicators of potential non-stormwater discharges (including presence or evidence of suspect flow and sensory observations such as odor, color, turbidity, floatables, or oil sheen) as of the most recent inspection.

(6) System mapping

The permittee shall develop a revised and more detailed map than was required by the previous permit issued January 9, 2004. This revised map of the MS4 shall include, at a minimum, parts of the MS4 within the Urbanized Area and those catchment areas of the MS4 with either DCIA of greater than 11% or which discharge to impaired waters ("priority" areas). This map shall be completed within three (3) years of the effective date of this permit for existing 2004 MS4 permittees and by the end of the permit term for new 2004 MS4 permittees. This permit does not provide additional time for existing 2004 MS4 permittees for completion of the mapping that was required by the previous permit.

- (a) The mapping shall include, at a minimum, a depiction of the permittee's separate storm sewer system in the priority areas described above. The mapping is intended to facilitate the identification of key infrastructure and factors influencing proper system operation, and the potential for illicit sanitary sewer discharges. The map shall include the required infrastructure and water resources information as indicated in subparagraph (i), below, and shall include the information in subparagraph (ii), below, where available. The Commissioner also recommends the inclusion of additional items as indicated in subparagraph (iii), below.
 - (i) Required mapping elements
 - Municipal separate storm sewer system
 - outfalls and receiving waters (required by previous permit)
 - pipes
 - open channel conveyances (swales, ditches, etc.)
 - catch basins
 - manholes
 - interconnections with other MS4s and other storm sewer systems

- municipally-owned stormwater treatment structures (e.g. detention and retention basins, infiltration systems, bioretention areas, water quality swales, gross particle separators, oil/water separators, or other proprietary systems)
- Catchment delineations as defined in Section 2 for use in priority rankings required in subsection (7)(c), below, or prioritizing BMP retrofits.
- Waterbodies identified by name and indication of all use impairments as identified on the most recent Integrated Water Quality Report pursuant to Clean Water Act section 303(d) and 305(b).

(ii) Elements required where available

- Municipal sanitary sewer system;
- Municipal combined sewer system, if applicable

(iii) Recommended elements

- Storm sewer material, size and age.
- Sanitary sewer system material, size and age
- Where a municipal sanitary sewer system exists, properties known or suspected to be served by a septic system, especially in high-density urban areas
- Area where the permittee's MS4 has received or could receive flow from septic system discharges (e.g. areas with poor soils, or high ground water elevations unsuitable for conventional subsurface disposal systems)
- Seasonal high water table elevations impacting sanitary alignments
- Topography
- Orthophotography
- Alignments, dates and representation of work completed (with legend) of past illicit discharge investigations (e.g. flow isolation, dye testing, CCTV)
- Locations of suspected, confirmed and corrected illicit discharges (with dates and flow estimates)
- (b) The mapping may be produced by hand or through computer-aided methods (e.g. GIS). The required scale and detail of the map shall be appropriate to facilitate a rapid understanding of the system by the permittee and the Commissioner. In addition, the mapping shall serve as a planning tool for the implementation and phasing of the IDDE program and demonstration of the extent of complete and planned investigations and corrections. The permittee shall update the mapping as necessary to reflect newly discovered information and required corrections or modifications.
- (c) The permittee shall report on the progress towards the completion of the map required by this permit in each annual report.
- (7) Written Illicit Discharge Detection and Elimination Program

The IDDE program shall be recorded in a written document pursuant to Section 6(a)(3) of the general permit. The IDDE program shall include each of the elements described in subsections (a) – (h), below, unless the permittee provides a written explanation within the IDDE program as to why a particular element is not applicable to the permittee.

Notwithstanding the permittee's explanation, the Commissioner may at any time determine that a particular element is in fact applicable to the permittee and require the permittee to add it to the IDDE program. The written IDDE program shall be completed within one (1) year of the effective date of the permit for existing 2004 MS4 permittees and within two (2) years of the effective date of this general permit for new MS4 permittees. The permittee shall implement the IDDE program in accordance with the goals and milestones set forth in subsection (8), below.

(a) Legal Authority

The IDDE program shall provide that the permittee has adequate legal authority to accomplish the following tasks: prohibit illicit discharges; investigate suspected illicit discharges; eliminate illicit discharges, including discharges from properties not owned by or controlled by the MS4 that discharge into the MS4 system; and implement appropriate enforcement procedures and actions. Adequate legal authority consists of a currently effective ordinance, by-law, or other regulatory mechanism. For existing 2004 MS4 permittees, the ordinance, by-law, or other regulatory mechanism was a requirement of that permit and was required to be effective by January 8, 2009. These permittees shall update their IDDE legal authority within one year of the effective date of this permit. New MS4 permittees must establish this legal authority on or before two (2) years of the effective date of this permit. The written IDDE program shall include a reference or citation of the authority the permittee will use to implement all aspects of the IDDE program.

(b) Statement of IDDE Program Responsibilities

The permittee shall establish a written statement that clearly identifies responsibilities with regard to eliminating illicit discharges. The statement shall identify the lead permittee agency(ies), department(s) or personnel responsible for implementing the IDDE Program as well as any other agencies, departments or personnel that may have responsibilities for aspects of the program (e.g. state or local health officials responsible for overseeing septic system construction; sanitary sewer system staff; inspectional services for enforcing plumbing codes; town counsel responsibilities in enforcement actions, institutional support staff etc.). Where multiple departments, agencies or personnel have responsibilities with respect to the IDDE program specific areas of responsibility shall be defined and processes for coordination and data sharing shall be established and documented.

(c) Assessment and Priority Ranking of Catchments

The permittee shall assess and priority rank the catchments, delineated as required by subsection (6)(a), above, in terms of their potential to have illicit discharges and SSOs and the related public health significance. This ranking will determine the priority order for screening of outfalls and interconnections pursuant to subsection (d), below, catchment investigations for evidence of illicit discharges and SSOs pursuant to subsection (e), below, and provides the basis for determining permit milestones pursuant to subsection (8), below.

- (i) The permittee shall classify each catchment into one of the following categories:
 - Excluded catchments: Catchments with no potential for illicit discharges may be
 excluded from the IDDE program. This category is limited to roadway drainage in
 undeveloped areas with no dwellings and no sanitary sewers; drainage for athletic
 fields, parks or undeveloped green space and associated parking without services;

- cross-country drainage alignments (that neither cross nor are in proximity to sanitary sewer alignments) through undeveloped land.
- Problem Catchments: Catchments with known or suspected contributions of illicit discharges based on existing information shall be designated as Problem Catchments. This shall include any catchments where previous outfall/interconnection screening indicates sewer input based on olfactory/visual evidence or sampling results (ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and bacteria levels greater than the water quality criteria applicable to the receiving water; or ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and detectable levels of chlorine). Problem Catchments need not be screened pursuant to subsection (d), below, and shall be scheduled for catchment investigation pursuant to subsection (e), below. Problem catchments shall be identified during the initial ranking of catchments and subsequent rankings shall not add any catchments to the Problem Catchment category.
- High Priority Catchments: Catchments that have not been classified as Problem Catchments and that are discharging to an area of concern to public health due to proximity of public beaches, recreational areas, drinking water supplies or shellfish beds; catchments determined by the permittee as high priority based on outfall/interconnection screening under subsection (d), below, and catchment characteristics assessment under subparagraph (c)(ii), below. Any catchment where outfall/interconnection screening indicates sewer input based on olfactory/visual evidence or sampling results (ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and bacteria levels greater than the water quality criteria applicable to the receiving water; or ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and detectable levels of chlorine) shall be ranked at the top of the High Priority Catchments category and scheduled for catchment investigation pursuant to subsection (e), below.
- Low Priority Catchments: Catchments determined by the permittee as low priority based on outfall/interconnection screening under subsection (d), below, and catchment characteristics assessment under subparagraph (c)(ii), below.
- (ii) The permittee shall priority rank catchments within each category (except for excluded catchments), based on screening factors. The permittee shall, at a minimum, consider the following screening factors:
 - Past discharge complaints and reports.
 - Poor dry weather receiving water quality- the following guidelines are recommended to identify waters as having a high illicit discharge potential: exceeding water quality standards for bacteria; ammonia levels above 0.5 mg/l; surfactants levels greater than or equal to 0.25 mg/l.
 - Density of generating sites Generating sites are those places, including institutional, municipal, commercial, or industrial sites, with a potential to generate pollutants that could contribute to illicit discharges. Examples of these sites include, but are not limited to, car dealers; car washes; gas stations; garden centers; and industrial manufacturing areas.
 - Age of surrounding development and infrastructure Industrial areas greater than 40 years old and areas where the sanitary sewer system is more than 40 years old will probably have a high illicit discharge potential. Developments 20 years or younger will probably have a low illicit discharge potential.
 - Sewer conversion Catchments that were once serviced by septic systems, but have been converted to sewer connections may have a high illicit discharge potential.

- Historic combined sewer systems Catchments that were once serviced by a combined sewer system, but have been separated may have a high illicit discharge potential.
- Density of aging septic systems Septic systems thirty years or older in residential land use areas are prone to have failures and may have a high illicit discharge potential. Consultation with local or state health officials is strongly encouraged.
- Culverted streams any river or stream that is culverted for distances greater than a simple roadway crossing may have a high illicit discharge potential.

The permittee may also consider as priorities for evaluation for illicit discharges, although not necessarily indicators of the presence of illicit connections or discharges:

- Water bodies that receive a discharge from the MS4 and are drinking water supplies, shell fishing areas, beaches or waters used for contact recreation.
- Impaired waterbodies that receive a discharge from the MS4 or waters with approved TMDLs applicable to the permittee, where illicit discharges have the potential to contain the pollutant identified as the cause of the impairment.

The permittee may add additional relevant factors, including location-specific screening factors; if so, the permittee shall include the additional factors in its written IDDE program.

(iii) An initial illicit discharge potential assessment and priority ranking based on existing information shall be completed within two (2) years from the effective date of the permit for existing 2004 MS4 permittees. New MS4 permittees shall complete this assessment and ranking by the end of the term of the permit. The permittee shall update its assessment and priority ranking annually based on catchment delineations pursuant to subsection (6), above, the results of screening pursuant to subsection (d), below, and other new relevant information. The permittee shall provide a listing of all catchments and the results of the ranking for each catchment in each annual report. For each catchment being investigated the permittee shall also provide in its annual report (1) a summary of evidence of known or suspected illicit discharges and SSOs; (2) completed, ongoing or planned corrective measures addressing confirmed illicit discharges and SSOs; and (3) a schedule for completing and verifying measures correcting the confirmed illicit discharges and SSOs.

(d) Outfall and Interconnection Screening and Sampling

The IDDE program shall include a written procedure for screening and sampling of outfalls and interconnections from the MS4 in dry and wet weather for evidence of illicit discharges and SSOs. This screening procedure shall be used for:

- baseline outfall and interconnection screening pursuant to subparagraph (iii), below (dry weather);
- confirmatory screenings pursuant to subsection (f), below (dry and/or wet weather depending on catchment characteristics);
- follow-up screening pursuant to subsection (g), below (dry and/or wet weather depending on catchment characteristics).
- (i) The screening and sampling procedure shall include procedures for sample collection, use of field kits, storage and conveyance of samples (including relevant hold times).

- (ii) If an outfall is inaccessible or submerged, the permittee shall proceed to the first accessible upstream manhole or structure for the observation and sampling and report the location with the screening results. If an interconnection is inaccessible or submerged, interconnection screening shall occur at the first accessible location within the permittee's system upgradient of the interconnection.
- (iii) Dry weather screening and sampling shall proceed only when no more than 0.1 inches of rainfall has occurred in the previous 24-hour period. When a flow is observed, a sample of the flow shall be collected and analyzed for the parameters listed in subparagraph (v), below. If no dry weather flow is observed, the permittee shall record the condition of the outfall and other relevant information. If no flow is observed, but evidence of dry weather flow exists, the permittee shall revisit the outfall during dry weather within one week of the initial observation, if practicable, to perform a second dry weather screening and sample any observed flow. The permittee shall identify in the annual report any other necessary follow-up actions to identify the source of any apparent intermittent flow not sampled.
- (iv) Wet weather screening and sampling, which shall be conducted at an outfall and/or within the catchment area in accordance with subparagraph (e)(ii)b., below, shall proceed during or after a storm event of sufficient depth or intensity to produce a stormwater discharge but only during the spring (March to June) when groundwater levels are relatively high. The permit does not require a minimum rainfall event prior to wet weather screening. However, the purpose of wet weather screening and sampling under the IDDE program is to identify illicit discharges that may activate or become evident during wet weather. Permittees may incorporate provisions that assist in targeting such discharges, including avoiding sampling during the initial period of discharge ("first flush") and/or identifying minimum storm event intensities likely to trigger sanitary sewer interconnections.
- (v) Samples shall be analyzed at a minimum for ammonia, chlorine, conductivity, salinity, *E. coli*. (freshwater receiving water) or enterococcus (saline or brackish receiving water), surfactants (such as MBAS), and temperature. All analyses with the exception of indicator bacteria can be performed with field test kits or field instrumentation. In addition, where the discharge is directly into a water quality limited water or a water subject to an approved TMDL, the sample shall be analyzed for the pollutants identified as the cause of the impairment. Sampling for pollutants of concern shall be conducted using the analytical methods found in 40 CFR §136, or alternative methods approved by the Commissioner in accordance with the procedures in 40 CFR §136. Other IDDE screening parameters shall be considered field screening and are not subject to 40 CFR Part 136 requirements.
- (vi) Catchments where there is relevant information indicating sewer input to the MS4 or sampling results where ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and bacteria levels greater than the water quality criteria applicable to the receiving water (or alternatively, ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and detectable levels of chlorine) shall be considered highly likely to contain illicit discharges from sanitary sources, and such catchments shall be ranked at the top of the High Priority Catchments category for investigation.

8

(e) Catchment Investigation Procedure

The permittee shall develop a written systematic procedure for catchment investigation that includes (1) a review of mapping and historic plans and records for the catchment; (2) a manhole inspection methodology; and (3) procedures to isolate and confirm sources of illicit discharges, as set forth below.

- (i) For each catchment being investigated, the permittee shall review relevant mapping and historic plans and records to the extent available, including but not limited to plans related to the construction of the storm drain and of sanitary sewers in the catchment, prior work performed on the storm drain or sanitary sewers, local health official or other municipal data on septic system failures or required upgrades, and complaint records related to SSOs, sanitary sewer surcharges, and septic system breakouts. This review shall be used to identify areas within the catchment with higher potential for illicit connections and System Vulnerability Factors that indicate a risk of sanitary or septic system inputs to the MS4 under wet weather conditions. Consultation with local or state health officials is strongly encouraged. The permittee shall identify and record the presence of any of the following specific System Vulnerability Factors:
 - History of SSOs, including, but not limited to, those resulting from wet weather, high water table, or fat/oil/grease blockages;
 - Sewer pump/lift stations, siphons, or known sanitary sewer restrictions where power/equipment failures or blockages could readily result in SSOs;
 - Inadequate sanitary sewer level of service (LOS) resulting in regular surcharging, customer back-ups, or frequent customer complaints;
 - Common or twin-invert manholes serving storm and sanitary sewer alignments;
 - Common trench construction serving both storm and sanitary sewer alignments;
 - Crossings of storm and sanitary sewer alignments;
 - Sanitary sewer alignments known or suspected to have been constructed with an underdrain system;
 - Sanitary sewer infrastructure defects such as leaking service laterals, cracked, broken, or offset sanitary infrastructure, directly piped connections between storm drain and sanitary sewer infrastructure, or other vulnerability factors identified through Inflow/Infiltration Analyses, Sanitary Sewer Evaluation Surveys, or other infrastructure investigations.
 - Areas formerly served by combined sewer systems;
 - Any sanitary sewer and storm drain infrastructure greater than 40 years old in medium and densely developed areas;
 - Widespread code-required septic system upgrades required at property transfers (indicative of inadequate soils, water table separation, or other physical constraints of the area rather that poor owner maintenance);
 - History of multiple local health department or sanitarian actions addressing widespread septic system failures (indicative of inadequate soils, water table separation, or other physical constraints of the area rather that poor owner maintenance);

The permittee shall document the presence or absence of System Vulnerability Factors for each catchment, retain this documentation as part of its IDDE program, and report this

information in Annual Reports. Where System Vulnerability Factors are present, the catchment shall be investigated pursuant to subparagraph (ii)b., below.

(ii) The manhole inspection methodology shall describe a storm drain network investigation that involves systematically and progressively observing, sampling (as required below) and evaluating key junction manholes in the MS4 to narrow the location of suspected illicit discharges or SSOs to an isolated pipe segment between two manholes, locate evidence of illicit discharges or SSOs that may not be evident at the outfall under all circumstances, and confirm or identify potential system vulnerability factors. The written catchment investigation procedures shall detail how the permittee will further isolate and identify potential illicit discharges as indicated by field kit detections equal to or greater than the threshold values listed in subparagraph (d)(vi), above. The permittee is responsible for selecting key junction manholes in a manner such that the distance between key junction manholes is appropriate to ensure a thorough assessment of its system.

The manhole inspection methodology may either start from the outfall and work up the system or start from the upper parts of the catchment and work down the system or be a combination of both practices. Either method must, at a minimum, include an investigation of each key junction manhole within the MS4, even where no evidence of an illicit discharge is observed at the outfall. The Catchment Investigation Procedure must describe the method the permittee will use.

a. Dry weather investigation

Key junction manholes shall be opened and inspected for visual and olfactory evidence of illicit connections (e.g. excrement, toilet paper, gray filamentous bacterial growth, or sanitary products present). If flow is observed, the permittee shall sample the flow at a minimum for ammonia, chlorine and surfactants and can use field kits for these analyses. Additional indicator sampling may assist in determining potential sources (e.g. bacteria for sanitary flows, conductivity to detect tidal backwater, etc.). Where sampling results or visual or olfactory evidence indicate potential illicit discharges or SSOs, the area draining to the junction manhole shall be flagged for further investigation, through upstream junction manhole investigation and/or isolation and confirmation of sources pursuant to subsection (e)(ii), above.

Manhole inspections in all areas shall also include identifying System Vulnerability Factors including common (twin invert) manholes, directly piped connections between storm drains and sanitary sewer infrastructure, common weir walls, sanitary sewer underdrain connections and other structural vulnerabilities where sanitary discharges could enter the storm drain system during wet weather. Where present, such System Vulnerability Factors shall be investigated pursuant to paragraph (b) below.

b. Wet weather investigation

Where the review of mapping and historic plans and records and/or manhole inspections indicate the presence of one or more System Vulnerability Factors as listed in subsection (e)(i), above, the permittee shall also inspect and sample under wet weather conditions to the extent necessary to determine whether wet weather-induced high flows in sanitary sewers or high groundwater in areas served by septic

systems result in discharges of sanitary flow to the MS4. The permittee shall conduct at least one wet weather screening and sampling at the outfall for any catchment where one or more System Vulnerability Factors are present. This sampling can be done upon completion of any dry weather investigation but must be completed before catchment investigation is marked as complete. All data shall be recorded and reported in each annual report.

(iii) Isolation and Source Verification Procedures

The permittee shall develop procedures to be used to isolate and confirm sources where manhole investigations or other physical evidence or screening has identified MS4 alignments to be influenced by illicit discharges or SSOs. These shall include isolation of the drainage area for implementation of more detailed investigations, inspection of additional manholes along the alignment to refine the location of potential contaminant sources, and methods such as caulk damns, targeted internal plumbing inspections, dye testing, video inspections, or smoke testing to isolate and confirm the sources.

(f) Removal and Confirmation

When the source of an illicit discharge or SSO is identified and confirmed, the permittee shall exercise its authority as necessary to require its removal pursuant to subsections (2) or (3), above. For each confirmed source the permittee shall include in the annual report the following information: the location of the discharge and its source(s), a description of the discharge, the method of discovery, date of discovery, date of elimination, mitigation or enforcement action; and estimate of the volume of flow removed.

Within one year of removal of all identified illicit discharge and SSO sources within a catchment area, confirmatory outfall or interconnection screening shall be conducted. The confirmatory screening shall be conducted in dry weather unless System Vulnerability Factors have been identified in the catchment pursuant to subsection (e)(i), above, in which case both dry weather and wet weather confirmatory screening shall be conducted. If confirmatory screening indicates evidence of additional illicit discharges, the catchment shall be scheduled for additional investigation. Confirmatory screening is not required in catchments where no illicit discharges or system vulnerability factors have been identified and no previous screening indicated suspicious flows.

(g) Follow-up Screening

Upon completion of catchment investigation pursuant to subsection (e), above, and illicit discharge removal and confirmation (if necessary) pursuant to subsection (f), above, the catchment outfall or interconnection shall be scheduled for follow-up screening within five years, or sooner as determined by the permittee based on the catchment's illicit discharge priority. Follow-up screening shall consist of dry weather screening and sampling except that wet weather screening and sampling shall also be required in catchments where wet weather screening was required by subparagraph (e)(ii)b., above.

(h) Illicit Discharge Prevention Procedures

The permittee shall develop and implement mechanisms and procedures designed to prevent illicit discharges and SSOs, such as: spill response and prevention procedures including identification of spills, reporting procedures, containment procedures, and documentation;

public awareness (this may be a part of the education program required by subsection (2), above); reporting (hotlines) and training of public employees involved in the IDDE program on ways to identify potential illicit discharges and SSOs.

(8) IDDE Program Implementation Goals and Milestones

The permittee shall implement the IDDE Program to meet the following goals and milestones:

- (a) The permittee shall complete dry weather screening and sampling (where flowing) of every MS4 outfall and interconnection (except Excluded and Problem Catchments) no later than three years from the permit effective date for existing 2004 MS4 permittees and by the end of the permit term for new MS4 permittees. Existing 2004 MS4 permittees may rely on screening conducted under the previous permit issued January 9, 2004, pursuant to an enforcement action, or by the Commissioner to the extent that it meets the requirements of subsection (7), above. New MS4 permittees shall complete dry weather screening and sampling of every MS4 outfall and interconnection (except Excluded and Problem Catchments) no later than the end of the permit term. All data shall be reported in each annual report. Permittees that have conducted substantially equivalent monitoring to that required by subsection (7)(d), above, as part of an enforcement action can request an exemption from the requirements of subsection (7)(d), above, by submitting a written request to the Commissioner and retaining exemption approval from the Commissioner as part of the Plan. Until the permittee receives formal written approval of the exemption from subsection (7)(d), above, from the Commissioner the permittee remains subject to all requirements of subsection (7)(d), above.
- (b) Existing 2004 MS4 permittees shall begin investigations using the procedure developed in accordance with subsection (7)(d), above, within three months of investigation procedure finalization and no later than 15 months (1 year and 3 months) from the effective date of the permit. New MS4 permittees shall begin these investigations no later than 2 years and 3 months from the effective date of the permit. All permittees shall make continued progress each year toward meeting the milestones of subsection (8)(c), below. The permittee shall continue investigation, including Problem Catchments, using its existing IDDE program until such time as the procedure under subsection (7)(e), above, is developed.
- (c) The permittee shall implement the Catchment Investigation Procedure in every catchment of the MS4, even where dry weather screening does not indicate evidence of illicit discharges. The permittee shall begin implementation of the procedure in Problem Catchments and those catchments with the highest ranking in the Assessment of Priority Catchments pursuant to subsection (7)(c), above, Implementation of the Catchment Investigation Procedure shall comply with the following milestones. For purposes of these milestones, a catchment investigation is considered complete if a permittee has completed all elements of subsection (7)(e), above.
 - i. The permittee shall complete the Catchment Investigation Procedure in a minimum of 80% of the MS4 area served by Problem Catchments within three years of the permit effective date and 100% of Problem Catchments within five years of the permit effective date.
 - ii. The permittee shall complete the Catchment Investigation Procedure in every catchment of the MS4 where information indicates sewer input including outfall/interconnection screening that indicates sewer input based on olfactory/visual evidence or sampling results (ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and bacteria levels greater than the water

12

quality criteria applicable to the receiving water; or ammonia ≥ 0.5 mg/l, surfactants ≥ 0.25 mg/l, and detectable levels of chlorine) within five (5) years of the permit effective date.

- iii. The permittee shall complete the Catchment Investigation Procedure in 40% of the area served by all MS4 catchments within five (5) years of the permit effective date, and in 100% of the area served by all MS4 catchments within ten (10) years of the permit effective date. The permittee may count the area of low priority catchments only if the Catchment Investigation has been started in all other MS4 catchments. For the purposes of this section, catchment investigations that have been started include those where provisions of subsections (7)(e)(i) and (ii), above, have been completed.
- d. Where catchments do not contain junction manholes, the dry weather screening and sampling shall be considered as meeting the manhole inspection requirement. In these catchments, dry weather screenings that indicate potential presence of illicit discharges shall be further investigated pursuant to subsection (7)(e)(iii), above. Investigations in these catchments may be considered complete where dry weather screening reveals no flow; no evidence of illicit discharges or SSOs is indicated through sampling results or visual or olfactory means; and no wet weather System Vulnerability Factors are identified.
- e. The permittee shall track progress towards these milestones in each annual report.

(9) Indicators of IDDE Program Progress

The permittee shall define or describe indicators for tracking program success. At a minimum, indicators shall include measures that demonstrate efforts to locate illicit discharges, the number of SSOs and illicit discharges identified and removed, the percent and area in acres of the catchment area served by the MS4 evaluated using the catchment investigation procedure, and volume of sewage removed. The permittee shall evaluate and report the overall effectiveness of the program based on the tracking indicators in the annual report.

(10) Training

The permittee shall, at a minimum, annually provide training to employees involved in IDDE program about the program, including how to recognize illicit discharges and SSOs. The permittee shall report on the frequency and type of employee training in the annual report.

13

Appendix C

AQUIFER PROTECTION AREAS AND OTHER GROUNDWATER DRINKING SUPPLY AREAS

GUIDANCE INFORMATION

The Stormwater Management Plan ("the Plan") should consider measures to reduce or mitigate potential impacts to both ground water (aquifers) and surface waters, taking into consideration both quantity and quality of the runoff. The emphasis should be to minimize, to the extent possible, changes between pre-development and post-development runoff rates and volumes. Coordination and discussion with the local water company is strongly encouraged.

The basic stormwater principals for Aquifer Protection Areas (and other groundwater drinking supply areas) are to prevent inadvertent pollution discharges/releases to the ground, while encouraging recharge of stormwater where it does not endanger groundwater quality. The permittee should review Sections 19-13-B32(h) and (i) of the Regulations of Connecticut State Agencies for additional information. Measures include:

- prevent illicit discharges to storm water, including fuel/chemical pollution releases to the ground;
- minimize DCIA and disconnect large areas of DCIA with natural or landscape areas;
- direct paved surface runoff to aboveground type land treatment structures sheet flow, surface swales, depressed grass islands, detention/retention and infiltration basins, and wet basins. These provide an opportunity for volatilization of volatile organic compounds to the extent possible before the stormwater can infiltrate into the ground;
- provide necessary impervious pavement in high potential pollutant release areas. These "storm water hot spots" include certain land use types or storage and loading areas, fueling areas, intensive parking areas and roadways (see table below);
- only use subsurface recharge structures such as dry wells, galleries, or leaching trenches, to directly infiltrate clean runoff such as rooftops, or other clean surfaces. These structures do not adequately allow for attenuation of salts, solvents, fuels or other soluble compounds in groundwater that may be contained in runoff; and
- restrict pavement deicing chemicals, or use an environmentally suitable substitute such as sand only, or alternative de-icing agents such as calcium chloride or calcium magnesium.

Infiltration of stormwater should be **restricted** under the following site conditions:

- Land Uses or Activities with Potential for Higher Pollutant Loads: Infiltration of stormwater from these land uses or activities (refer to Table 7-5 below), also referred to as stormwater "hotspots," can contaminate public and private groundwater supplies. Infiltration of stormwater from these land uses or activities may be allowed by the review authority with appropriate pretreatment. Pretreatment could consist of one or a combination of the primary or secondary treatment practices described in the Stormwater Quality Manual provided that the treatment practice is designed to remove the stormwater contaminants of concern.
- Subsurface Contamination: Infiltration of stormwater in areas with soil or groundwater contamination such as brownfield sites and urban redevelopment areas can mobilize contaminants.
- Groundwater Supply and Wellhead Areas: Infiltration of stormwater can potentially contaminate groundwater drinking water supplies in immediate public drinking water wellhead areas.

Land Uses or Activities with Potential for Higher Pollutant Loads Table 7-5 of the 2004 Stormwater Quality Manual

Land Use/Activities

- Industrial facilities subject to the DEEP Industrial Stormwater General Permit or the U.S. EPA National Pollution Discharge Elimination System (NPDES) Stormwater Permit Program
- Vehicle salvage yards and recycling facilities
- Vehicle fueling facilities (gas stations and other facilities with on-site vehicle fueling)
- Vehicle service, maintenance, and equipment cleaning facilities
- Fleet storage areas (cars, buses, trucks, public works)
- Commercial parking lots with high intensity use (shopping malls, fast food restaurants, convenience stores, supermarkets, etc.)
- Public works storage areas

- Road salt storage facilities (if exposed to rainfall)
- Commercial nurseries
- Flat metal rooftops of industrial facilities
- Facilities with outdoor storage and loading/unloading of hazardous substances or materials, regardless of the primary land use of the facility or development
- Facilities subject to chemical inventory reporting under Section 312 of the Superfund Amendments and Reauthorization Act of 1986 (SARA), if materials or containers are exposed to rainfall
- Marinas (service and maintenance)
- Other land uses and activities as designated by the review authority

For further information regarding the design of stormwater collection systems in Aquifer Protection Areas, contact the Aquifer Protection Area Program at (860) 424-3020 or visit www.ct.gov/deep/aquiferprotection.

Appendix D - Impaired Waters Guidance

-	Surface Waters and Associated Sto	rmwater Pollutants of Concern		
Stormwater Pollutant of	Waterbodies included within a TMDL or Waters Included in Pollution Control	Impaired waters withou	ıt a TMDL	
Concern	Strategy Developed by CT DEEP	Impaired Designated Use	Cause	
Phosphorus	Any water body subject to a TMDL pollutant load reduction for Phosphorus or any waterbody included in the Interim Phosphorus Reduction Strategy for Connecticut Freshwater Non-tidal Receiving Rivers and Streams Technical Support Document (2014 or as amended), including but not limited to the Bantam River Watershed, Blackberry River Watershed, Factory Brook Watershed, Farmington River Watershed, Fivemile River Watershed, Hockanum River Watershed, Housatonic River Main Stem Watershed, Limekiln Brook Watershed, Naugatuck River Watershed, Norwalk River Watershed, Pequabuck River Watershed Pomperaug River Watershed, Pootatuck River Watershed, Quinebaug River Watershed, Quinnipiac River Watershed, Shetucket River Watershed or Willimantic River Watershed	Habitat for Fish, Other Aquatic Life and Wildlife or Recreation	Phosphorus, Nutrient/ Eutrophication Biological Indicators, Dissolved Oxygen, Chlorophyll-a, or Excess Algal Growth	
Nitrogen	Any water body subject to a TMDL pollutant load reduction for Nitrogen, including but not limited to the Long Island Sound TMDL for Dissolved Oxygen (entire state of CT)	Habitat for Marine Fish, Other Aquatic Life and Wildlife	Dissolved oxygen saturation, Nitrogen (Total), Nutrient / Eutrophication Biological Indicators, Oxygen, Dissolved	
Bacteria	Any water body subject to a TMDL pollutant load reduction for Total Coliform, Escherichia coli, Fecal coliform or Enterococci	Recreation, Existing or Proposed Drinking Water, Commercial Shellfish Harvesting Where Authorized or Shellfish Harvesting for Direct Consumption Where Authorized	Total Coliform, Escherichia coli, Fecal coliform or Enterococci	
Mercury	Any water body subject to a TMDL pollutant load reduction for Mercury (Entire state of Connecticut)	Habitat for Fish, Other Aquatic Life and Wildlife or Fish Consumption	Mercury	

Water	Quality Targets for Waters	for Which Bacteria is a S	tormwater Pollutan	t of Concern
Water Quality Classification	E. Coli (Freshwater Rec) (cols/100mls)	Enterococci (Marine Rec) (cols/100mls)	Fecal Coliform (Marine Shellfishing) (cols/100mls)	Total Coliform (Freshwater Drinking) (cols/100mls)
AA	Instantaneous designated swimming 235 / Non designated Swimming 410 / All other Recreation 576 Geomean 126	N/A	N/A	Monthly Moving average <100 / Single Sample Maximum 500
A	Same as AA	N/A	N/A	N/A
В	Same as AA	N/A	N/A	N/A
SA (Direct Consumption)	N/A	Instantaneous Designated Swimming 104 / Instantaneous All other Uses 500 / Geomean 35	Geomean 14 / 90% of samples <31	N/A
SB (Indirect			Geomean 88 / 90% of samples <	
Consumption)	N/A	Same as SA waters	260	N/A

Appendix C

Town of Groton
General Permit Registration Form
for the discharge of Stormwater from Small MS4s



Connecticut Department of Energy & Environmental Protection

Bureau of Materials Management & Compliance Assurance Water Permitting & Enforcement Division

General Permit Registration Form for the Discharge of **Stormwater from Small Municipal Separate Storm Sewer Systems** (MS4)

	CPPU USE ONLY	
App #:		
Doc#:		_
Check	#:	_
	Program: Stormwater Permits	_

Please complete this form in accordance with the general permit (DEEP-WPED-GP-021) in order to ensure the proper handling of

your registration. Please print or type unless otherwise noted. The Registration fee must be submitted with this registration.

Part I: Registration Type

1.	This registration is for a (check one):	For renewals or modifications:			
	New general permit registration	Existing permit number: GSM 000055			
\boxtimes	Renewal of an existing registration				
	A modification of an existing registration				
2.	Registrant Type (check one):	Fees			
	state institution/agency	\$625.00 [513]			
	federal institution/agency	\$625.00 [513]			
		\$312.50 [513]			
3.	Municipality name or Municipality where institution is located: <u>Town of Groton</u>				
	The registration will not be processed without the fee. The fee shall be non-refundable and shall be paid by check or money order to the Department of Energy and Environmental Protection or by such other method as the commissioner may allow.				

Part II: Registrant Information

1.	Registrant	(Name of	Municipality or	State or Federal	Institution/Agency)	: Town of Gro	oton
----	------------	----------	-----------------	------------------	---------------------	---------------	------

Mailing Address: 45 Fort Hill Road

City/Town: Groton

State: CT

Zip Code: 06340

Business Phone: 860-441-6630

ext.:

Contact Person: Mark Oefinger

Phone: 860-441-6633

ext.

*E-mail: moefinger@groton-ct.gov

*By providing this e-mail address you are agreeing to receive official correspondence from DEEP, at this electronic address, concerning the subject registration. Please remember to check your security settings to be sure you can receive e-mails from "ct.gov" addresses. Also, please notify DEEP if your e-mail address changes.

Part II: Registrant Information (continued)

2.	Billing contact, if different than the registrant.			
	Name: Town of Groton Public Works Department		•	
	Mailing Address: 134 Groton Long Point Road			
	City/Town: Groton	State: CT	Zip Code:	06340
	Business Phone: 860-448-4083	ext.:		
	Contact Person: Kristin Doundoulakis	Phone: 860-448-	4544	ext.
	*E-mail: kdoundoulakis@groton-ct.gov			
3.	Primary contact for departmental correspondence and inquiri	es, if different tha	n the regis	trant.
	Name: Town of Groton Public Works Department			
	Mailing Address: 134 Groton Long Point Road			
	City/Town: Groton	State: CT	Zip Code:	06340
	Business Phone: 860-448-4083	ext.:		
	Contact Person: Kristin Doundoulakis	Phone: 860-448	-4544	ext.
	*E-mail: kdoundoulakis@groton-ct.gov			
4.	Attorney or other representative, if applicable:			
	Firm Name:			
	Mailing Address:			
	City/Town:	State:	Zip Code:	
	Business Phone:	ext.:		
	Attorney:	Phone:		ext.
	*E-mail:			
5.	Facility Operator, if different than the registrant:			
	Name:			
	Mailing Address:			
	City/Town:	State:	Zip Code:	
	Business Phone:	ext.:		
	Contact Person: Phone:	ext.		
	*E-mail:			
7.	Engineer(s) or other consultant(s) employed or retained to ass constructing the activity. Check here if additional sheets are	sist in preparing t e necessary, and la	he registra bel and atta	tion or in designing or ach them to this sheet.
	Name: Greg Hanover			
	Mailing Address: 134 Groton Long Point			
	City/Town: Groton	State: CT	Zip Code:	06340
	Business Phone: 860-448-4066	ext.:		
	Contact Person: Greg Hanover	Phone:		ext.
	*E-mail: ghanover@groton-ct.gov			
	Service Provided: Qualified Professional Certification			
8.	Check here if there are adjacent towns or other entities Management Plan is coordinated for a portion of the sub towns or entities: <u>City of Groton, Groton Long Point, Na</u>	oject MS4. If so, p	provide the	names of such

Page 2 of 7

Rev. 01/11/17

DEEP-WPED-REG-021

Part III: Watershed Information

Provide the following information about the receiving water(s) that receive stormwater runoff from your MS4: The watershed ID and impaired waters status can be found on the CT ECO website: http://ctecoapp1.uconn.edu/advancedviewer/	nation about the recei	ving water(s) that rece	ive stormwate e: http://ctecoap	r runoff fror	n your MS4: u/advancedviewe <u>r/</u>
				If you answered yes to question c.1, then answer the question below. c.2)	red yes to hen answer n below.	If you answered yes to question c.2, then answer the question below.
a) To what receiving stream, watershed or waterbody does vour	b) What is your watershed ID	c.1) Is the receiving water identified as	1) ceiving ntified as	Has any Total Maximum Daily Load (TMDL) been approved for your receiving waterbody?	Maximum MDL) been or your terbody?	
MS4 discharge?	(freshwater) or 305b ID (estuary)?	an impaired water?	ed water?	For more information, go to www.ct.gov/deep/tmdl	nation, go to leep/tmdl	If TMDL, identify the impairment
Hempstead Brook/Latham Lake	2107-05-1	☐ YES	NO	□ YES	ON	
Lamb's Pond	2107-06-1	□ YES	ON ⊠	☐ YES	ON	
Great Brook	2107-00	□ YES	ON ⊠	□ YES	ON	
Groton Reservoir	2107-00	□ YES	ON 🖂	□ YES	ON 🗌	
Culver Brook Watershed	2107-02	□ YES	ON 🖂	☐ YES	ON 🗆	
West Branch	2105-03-1	□ YES	o _N	☐ YES	ON 🗆	
Haley's Brook	2105-00-2	□ YES	o _N	YES	ON	
Red Brook Watershed	2105-02-2	□ YES	ON 🖂	☐ YES	ON [
Bindloss Brook	2106-01-1	□ YES	ON 🖂	☐ YES	ON .	
Mystic River	CT-E1_007	□ YES	NO 🖂	☐ YES	ON	
Fishtown Brook	2106-02-1	□ YES	ON 🖂	☐ YES	ON [
Fishtown Brook	2000-19-1	☐ YES	ON 🖂	☐ YES	ON [
Eccleston Brook	2000-18-1	□ YES	ON 🖂	☐ YES	ON	
Cowslip Brook	2000-18-2	☐ YES	ON ⊠	☐ YES	ON .	
Ramble Brook	2000-19-1	☐ YES	ON 🖂	☐ YES	ON	
S Check here if there are more receiving watersheds and attach an additional sheet listing them with the required information requested above.	sheds and attach an addi	tional sheet li	sting them w	ith the required in	formation requ	uested above.

Part III: Watershed Information

Provide the following information about the receiving water(s) that receive stormwater runoff from your MS4: The watershed ID and impaired waters status can be found on the CT ECO website: http://ctecoapp1.uconn.edu/advancedviewer/	nation about the receivers status can be found	ving water(s) that rece	ive stormwate	r runoff fron	n your MS4: u/advancedviewer <u>/</u>
				If you answered yes to question c.1, then answer the question below.	red yes to hen answer n below.	If you answered yes to question c.2, then answer the question below.
		Service Control		c.2)		
a)	(q	c.1)	1)	Has any Total Maximum Daily Load (TMDL) been approved for your	MDL) been for your	
To what receiving stream, watershed or waterbody does your MS4 discharge?	what is your watershed ID (freshwater) or 305b	Is the receiving water identified as	ceiving ntified as	receiving waterbody? For more information, go to	sterbody?	If TMDL, identify the
	ID (estuary)?			www.ct.gov/deep/tmdl	deep/tmdi	impairment
Fort Hill Brook	2000-22-1	☐ YES	ON X	YES	ON I	
Birch Plain Creek Watershed	2000-26-1	□ YES	ON 🖂	☐ YES	ON	
Birch Plain Creek	2000-27-1-	□ YES	oN ⊠	□ YES	ON 🗆	
Trails Pond	2000-27-1-	☐ YES	ON ⊠	□ YES	ON 🗌	
Baker Cove Watershed	2000-28-1	□ YES	ON 🖂	□ YES	ON 🗌	
Mystic Harbor	CT-E1_008	□ YES	oN ⊠	□ YES	ON 🗆	
Beebe Cove	CT-E1_009	⊠ YES	0N	⊠ YES	ON	fecal coliform
Palmer Cove	CT-E1_010	⊠ YES	0N	⊠ YES	ON	fecal coliform
Mumford Cove	CT-E1_011	⊠ YES	ON	⊠ YES	ON 🗆	fecal coliform
Poquonnock River	CT-E1_012	⊠ YES	ON	⊠ YES	ON 🗌	fecal coliform
West Cove	CT-E2_006	⊠ YES	ON	⊠ YES	ON [fecal coliform
Outer Mumford Cove	CT-E2_007	⊠ YES	ON	⊠ YES	ON 🗌	fecal coliform
Thames River	CT-E1_015	⊠ YES	ON 🗆	□ YES	ON 🖂	
		☐ YES	ON _	□ YES	ON	
		☐ YES	ON 🗌	☐ YES	ON	
🛛 Check here if there are more receiving watersheds and attach an additional sheet listing them with the required information requested above.	sheds and attach an addii	ional sheet li	sting them w	ith the required ir	าformation requ	rested above.

Rev. 01/11/17

Part IV: MS4 Information

1.	Name of Municipality or State or Federal Institution/Agency : Town of Groton				
	Primary Address or Location Description: 45 Fort Hill Road				
	City/Town: Groton State: CT Zip Code: 06340				
2.	INDIAN LANDS: Is there any activity included in, or proposed to be implemented by, your Stormwater Management Plan that will be located on federally recognized Indian lands? Yes No				
3.	COASTAL BOUNDARY: Is there any <i>new</i> activity included in, or proposed to be implemented by, your Stormwater Management Plan that will be located within the coastal boundary as delineated on DEEP approved coastal boundary maps?				
	☐ Yes ⊠ No				
	If yes, and this registration is for a new authorization or a modification of an existing authorization where the physical footprint of the subject activity is modified, your Stormwater Management Plan must contain provisions to assure compliance with <u>Connecticut's Coastal Management Act (CCMA)</u> , sections 22a-90 through 22a-112 of the Connecticut General Statutes (CGS), as amended.				
	Information on the coastal boundary is available at www.cteco.uconn.edu/map_catalog.asp (Select the town and then select coastal boundary. If the town is not within the coastal boundary you will not be able to select the coastal boundary map.) or the local town hall or on the "Coastal Boundary Map" available at DEEP Maps and Publications (860-424-3555).				
4.	ENDANGERED OR THREATENED SPECIES: According to the most current "State and Federal Listed Species and Natural Communities Map", is there any new activity included in, or proposed to be implemented by, your Stormwater Management Plan, that will be located within an area identified as a habitat for endangered, threatened or special concern species?				
	☐ Yes ☒ No Date of Map: December 2016				
	If yes, your Stormwater Management Plan must contain provisions to assure compliance with the <u>State Endangered Species Act CGS section 26-310(a)</u> .				
	For more information visit the DEEP website at www.ct.gov/deep/nddbrequest or call the NDDB at 860-424-3011.				
5.	AQUIFER PROTECTION AREAS: Is the MS4 or any portion of the MS4 located within a mapped Level A or Level B <u>Aquifer Protection Area</u> , as defined in CGS section 22a-354a through 22a-354bb?				
	☐ Yes ⊠ No				
	If yes, your Stormwater Management Plan must contain provisions to assure compliance with the Aquifer Protection Regulations (section 22a-354i(1)-(10) of the Regulations of Connecticut State Agencies).				
	For more information on the Aquifer Protection Area Program visit the DEEP website at www.ct.gov/deep/aquiferprotection or contact the program at 860-424-3020.				
6.	CONSERVATION OR PRESERVATION RESTRICTION: Is there any <i>new</i> activity included in, or proposed to be implemented by, your Stormwater Management Plan that will be located within a conservation or preservation restriction area?				
	☐ Yes ⊠ No				
	If Yes, your Stormwater Management Plan must contain provisions to assure compliance with CGS section 47-42d where proof of written notice of this registration to the holder of such restriction or a letter from the holder of such restriction verifying that this registration is in compliance with the terms of the restriction, must be-kept on site.				

Part IV: MS4 Information (Continued)

7.	STATE AND FEDERAL HISTORIC PRESERVATION: Is there any activity included in, or proposed to be implemented by, your Stormwater Management Plan that may result in impacts or potential effects on historic properties? Yes No
	If Yes, your Stormwater Management Plan must contain provisions to assure consistency with the <u>state Historic Preservation statutes, regulations, and policies</u> including identification of any potential impacts on property listed or eligible for listing on the Connecticut Register of Historic Places. A review conducted for an Army Corps of Engineers Section 404 wetland permit would meet this qualification.
8.	DISCHARGE TO IMPAIRED WATERS: Is there any activity included in, or proposed to be implemented by, your Stormwater Management Plan that will result in a <i>new or increased</i> discharge from the MS4 to waters listed as impaired in the most recent Connecticut Integrated Water Quality Report pursuant to Clean Water Act section 303(d) and 305(b)?
	☐ Yes ⊠ No
	If Yes, your Stormwater Management Plan must demonstrate that there is no net increase in loading to the impaired water of the pollutant for which the waterbody is impaired.
9.	DISCHARGE TO HIGH QUALITY WATERS: Any new or increased stormwater discharge to high quality waters shall be discharged in accordance with the Connecticut Anti-Degradation Implementation Policy in the Water Quality Standards.

Part V: Supporting Documentation

Check the applicable box below for each attachment being submitted with this registration form. When submitting any supporting documents, please label the documents as indicated in this part (e.g., Attachment A, etc.) and be sure to include the registrant's name as indicated on this registration form.

\boxtimes	Attachment A:	Stormwater Management Plan: (REQUIRED for ALL registrants)
		Provide URL: http://www.groton-ct.gov/depts/pubwks/storm.asp
5		or ☐ submit an electronic copy to the web address indicated at the end of this form.
\boxtimes	Attachment B:	An 8 1/2" X 11" copy of the relevant portion or a full-sized original of a USGS Quadrangle Map indicating the exact location of the MS4/Institution/Agency. Indicate the quadrangle name on the map. (REQUIRED for ALL registrants)
\boxtimes	Attachment C:	Best Management Practices Table (attached to this form) (REQUIRED for ALL registrants)

Part VI: Registrant Certification

The registrant *and* the individual(s) responsible for actually preparing the registration must sign this part. A registration will be considered insufficient unless *all* required signatures are provided *and are the proper signatory authority.* (If the registrant is the preparer, please mark N/A in the spaces provided for the preparer.)

"I hereby certify that I am making this certification in connection with a registration under the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (MS4), submitted to the commissioner by the Town of Groton for an activity located at or within the Town of Groton and that all terms and conditions of the general permit are being met for all discharges which have been initiated and such activity is eligible for authorization under such permit. I further certify that a system is in place to ensure that all terms and conditions of this general permit will continue to be met for all discharges authorized by this general permit at the site. I certify that the registration filed pursuant to this general permit is on complete and accurate forms as prescribed by the commissioner without alteration of their text. I certify that I have personally examined and am familiar with the information that provides the basis for this certification, including but not limited to all information described in Section 3(b)(8)(A) of such general permit, and I certify, based on reasonable investigation, including my inquiry of those individuals responsible for obtaining such information, that the information upon which this certification is based is true, accurate and complete to the best of my knowledge and belief. I certify that I have made an affirmative determination in accordance with Section 3(b)(8)(B) of this general permit. I understand that the registration filed in connection with such general permit is submitted in accordance with and shall comply with the requirements of section 22a-430b of Connecticut General Statutes. I also understand that knowingly making any false statement made in the submitted information and in this certification may be punishable as a criminal offense, including the possibility of fine and imprisonment under section 53a-157b of the Connecticut General Statutes and any other applicable law." March 30, 2017. Signature of Registrant/Authorized Representative Date Gary J. Schneider Director of Public Works Printed Name of Registrant/Authorized Representative Title (if applicable) March 30, 2017 Signature of Preparer (if different than above) Date Kristin Doundoulakis Project Management Specialist Printed Name of Preparer Title (if applicable) Check here if additional signatures are required. If so, please reproduce this sheet and attach signed

copies to this sheet. Signatures of any person preparing any report or parts thereof required in this registration (i.e., professional engineers, surveyors, soil scientists, consultants, etc.) must be included.

Part VII: Qualified Professional Certification

The qualified professional, as defined in the subject general permit, must sign this part. A registration will be considered insufficient unless *all* required signatures are provided *and are the proper signatory authority.*

"I hereby certify that I am a qualified professional engineer, as de of Stormwater from Small Municipal Separate Storm Sewer Systewith a registration under such general permit, submitted to the Coactivity located at or within the Town of Groton. I have personally that provides the basis for this certification, including but not limite 3(b)(9)(A) of such general permit, and I certify, based on reasonal individuals responsible for obtaining such information, that the infinitive, accurate and complete to the best of my knowledge and be information described in Section 3(b)(9)(A) of such general permit that I have made an affirmative determination in accordance with understand that this certification is part of a registration submitted Connecticut General Statutes and is subject to the requirements in such statute. I also understand that knowingly making any false punishable as a criminal offense, including the possibility of fine at the Connecticut General Statutes and any other applicable law."	ems. I am making this certification in connection or an examined and am familiar with the information ed to all information described in Section ble investigation, including my inquiry of those ormation upon which this certification is based belief. I certify, based on my review of all t and on the standard of care for such projects, Section 3(b)(9)(B) of this general permit. I in accordance with section 22a-430b of and responsibilities for a qualified professional estatement in this certification may be
Nothing in this section shall be construed to authorize a profession engage in any profession or occupation requiring a license under without such license.	anal engineer or a landscape architect to any other provision of the general statutes
X ky 4 N a	March 31, 2017
Signature of Qualified Professional Greg Hanover	Date Supervisor of Technical Services
Printed Name of Qualified Professional	Title (if applicable)
CT PE 16710 Qualified Professional License Number	
Mary home 1.11	March 31, 2017
Signature of Preparer (if different than above)	Date
Kristin Doundoulakis	Project Management Specialist
Printed Name of Preparer	Title (if applicable)
Check here if additional signatures are required. If so, plea copies to this sheet. Signatures of any person preparing ar registration (i.e., professional engineers, surveyors, soil sci	ny report or parts thereof required in this

All completed and supporting materials (along with the fee) are to be submitted to:


CENTRAL PERMIT PROCESSING UNIT

DEPARTMENT OF ENERGY AND ENVIRONMENTAL PROTECTION

79 ELM STREET

HARTFORD, CT 06106-5127

An electronic copy must also be sent to DEEP.StormwaterStaff@ct.gov

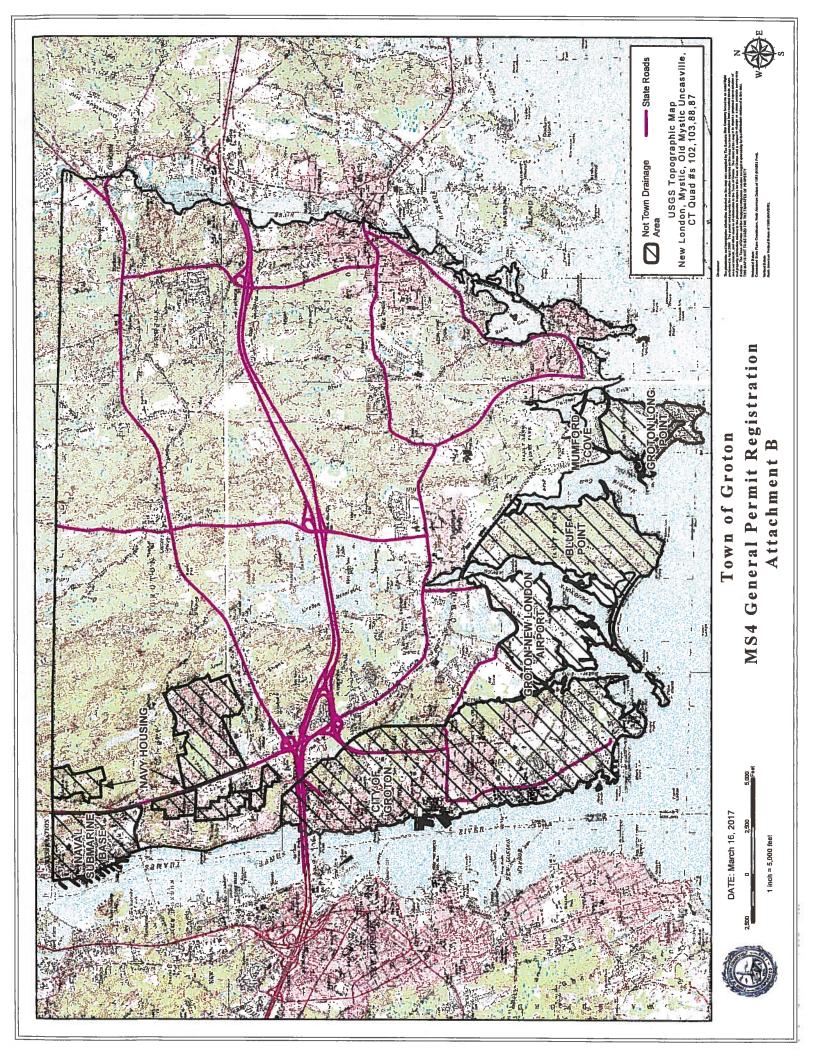

Best Management Practices (BMPs)

For each Minimum Control Measure (MCM), list existing or proposed BMPs, the department/parties that will be responsible for implementing each BMP, the goals(s) you expect to achieve, and the month and year that the BMP will be implemented. Please note that certain mandatory minimum BMPs identified in the MS4 General

Permit are already listed. Name of City/Town: **Town of Groton**

Name of Institution (if applicable):

Address: 45 Fort Hill Road, Groton, CT

Existing permit number (if applicable): GSM 000055

	MCM(1) Public Education and Outreach	Responsible Department/Parties	Measurable Goal	Month/Year of Implementation
	Implement public education program	Gary J. Schneider/PW	Post educational information on social media annually	6-30-2018
1-2	Address education/outreach for pollutants of concern	Gary J. Schneider/PW	One post to social media addressing Stormwater Pollutants of Concern	6-30-2018
1-3	Stormwater information provided on local cable access	Gary J. Schneider/PW	Program on local cable access channel aired annually	6-30-2018
1-4	Stormwater information provided on the Town's website	Gary J. Schneider/PW	Update Stormwater webpage annually	6-30-2018
1-5	Educate dog owners about picking up dog waste	Gary J. Schneider/PW	Pet waste fact sheets distributed to licensed dog owners with annual dog license	6-30-2018
7-5	Install and maintain no dumping signs at coastal access areas	Gary J. Schneider/PW	Annually inspect all signs and repair them as necessary	6-30-2018
1-7				
1-10	MCM(2) Public Involvement/Participation	Responsible Department/Parties	Measurable Goal	Month/Year of Implementation
2-1	Comply with public notice requirements for the Stormwater Management Plan and Annual Reports	Gary J. Schneider/PW	All required notices posted by deadline	1-31-2018
2-2	Stormwater Committee Meetings	Gary J. Schneider/PW	One meeting held annually	6-30-18
2-3	Sponsor community participation event	Gary J. Schneider/PW	One event held annually	6-30-18
2-5				
2-6				
2-7				
2-8				
2-9				
2-10				

Rev. 01/11/17

BMPs (continued)

Month/Year of Implementation	6-30-18	6-30-19	6-30-18	6-30-18	6-30-18	6-30-18		Month/Year of Implementation	6-30-19	7-1-17	7-1-17	6-30-19
Measurable Goal	Written IDDE Program developed by schedule deadline	Outfall and Interconnections inventory and map completed by deadline	Formal written program developed by deadline	Ordinance passed by Town Council by deadline	IDDE tracking spreadsheet developed by deadline	Areas with failing septic systems identified by the deadline; % of failing systems addressed annually		Measurable Goal	Existing regulations reviewed and revised as necessary by deadline	Site plan review and approval outlined	100% of site plans received are reviewed prior to approval for E&S control to prevent or minimize impacts to water quality	Formal inspection checklist reviewed and revised as necessary by deadline, 100% of site inspections conducted for all site plans received within reporting period, and percent of enforcement actions taken upon discovery of
Responsible Department/Partles	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW		Responsible Department/Parties	Jonathan Reiner/OPDS	Jonathan Reiner/OPDS	Jonathan Reiner/OPDS	Jonathan Reiner/OPDS
MCM(3) Illicit Discharge Detection & Elimination	Develop written IDDE program	Develop list and maps of all MS4 stormwater outfalls in urbanized and priority areas	Develop citizen reporting program	Establish legal authority to prohibit illicit discharges	Develop record keeping system for IDDE tracking	Address IDDE in areas with pollutants of concern		MCM(4) Construction Site Runoff Control	Implement, upgrade (as necessary) and enforce land use regs or other legal authority to meet requirements of MS4 general permit	Develop/implement plan for interdepartmental coordination in site plan review and approval	Review site plans for stormwater quality concerns	Conduct site inspections
	3-1	3-2	3-3	3-4	3-5	3-6	3-8 3-9 3-10		4-1	4-2	4-3	4-4

			deficiency	
4-5	Implement procedure to allow public comment on site development	Jonathan Reiner/OPDS	Public meetings held by Planning, Zoning and Inland Wetlands Agency for 100% of eligible projects; 100% of projects posted on Town website when not presented at a meeting	7-1-17
4-6	Implement procedure to notifiy developers about DEEP construction stormwater permit	Jonathan Reiner/OPDS	Flyers provided in 100% of preconstruction meetings and land use application reviews	7-1-17
4-7	Document compliance with the Connecticut Anti-Degradation Implementation Policy in the Water Quality Standards for all new or increased discharges to High Quality Waters from the MS4	Jonathan Reiner/OPDS	100% compliance with CT Anti-Degradation Implementation policy for all new or increased discharges to high quality waters	7-1-17
4-8	Demonstrate no new or increased discharges to Impaired Waters from the MS4	Jonathan Reiner/OPDS	Zero net increases in loading of pollutant(s) of concern to discharges from MS4 to Impaired Waters	7-1-17
6-4	Retain Water Quality Volume for all new stormwater discharges located less than 500 feet from a tidal wetland	Jonathan Reiner/OPDS	100% Water Quality Volume retained for all new stormwater discharges located less than 500 feet from a tidal wetland that is not a fresh-tidal wetland	7-1-17
4-10	Obtain required permits for stormwater discharges below the coastal jurisdiction line	Jonathan Reiner/OPDS	100% of all required permits obtained for all new stormwater discharges below the coastal jurisdiction line	7-1-17

Rev. 01/11/17

BMPs (continued)

Month/Year of Implementation	6-30-2021	6-30-2019	6-30-2019	6-30-2020	6-30-2019	7-1-2017	7-1-2017
Measurable Goal	By deadline: 1) Legal authority established for LID and runoff reduction practices; 2) Identification and, where appropriate, reduction or elimination of existing local regulatory barriers to implementing LID and runoff practices; and 3) Consideration of the watershed protection elements to manage the impacts of stormwater on receiving waters	Percent of LID projects required by Town for approval of those received within the reporting period	Inspect 100% of Town- owned stormwater basins and treatment structures annually	Percent of total outfalls that DCIA has been mapped and calculated for	Plan developed within 12 months of identification. 100 % of identified problems corrected within required timeframe	100% of control measures or conditions implemented and maintained	100% of the discharge requirements consistent with the applicable Wasteload Allocations, Load Allocations or Water Quality Targets for that TMDL followed for new authorized discharges to a water with a TMDL or with a pollutant
Responsible Department/Parties	Jonathan Reiner/OPDS	Jonathan Reiner/OPDS	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Jonathan Reiner/OPDS	Jonathan Reiner/OPDS
MCM(5) Post-Construction Stormwater Management	Establish and/or update legal authority and guidelines regarding LID and runoff reduction in site development planning	Enforce LID/runoff reduction requirements for development and redevelopment projects	Implement long-term maintenance plan for stormwater basins and treatment structures	DCIA mapping	Address post-construction issues in areas with pollutants of concern	Implement and maintain any control measures or conditions for New Discharge to an Impaired Water without an Established TMDL	Additional requirements for all new and existing discharges to a water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL
	- -	5-2	5-3	5-4	5-5	2-6	2-2

	Month/Year of Implementation	12-31-2017	12-31-2017	12-31-2017	12-31-2017	12-31-2017	12-31-2017	12-31-2017	12-31-2017	12-31-2017	12-31-2017	12-31-2017	
load reduction established within the TMDL; BMPs implemented as necessary for all existing discharges to a Water with an Established TMDL or with a Pollutant Load Reduction specified within the TMDL	Measurable Goal	100% of required operational employees trained annually	100% of existing SOP's reviewed and updated	Interconnected MS4 coordination implemented within deadline	Program developed and implemented to control the contribution of pollutants to MS4 by deadline	Additional measures implemented by deadline	The total amount of DCIA that has been disconnected during a given year	Program developed and implemented by deadline	Plan developed by deadline; 2% DCIA disconnected by deadline	100% of Roads swept at least twice annually	100% of catch basins cleaned within schedule	SOPs for the use, handling, storage, application, and disposal of deicing products developed and implemented by deadline	
	Responsible Department/Parties	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	Gary J. Schneider/PW	
	MCM(6) Pollution Prevention/Good Housekeeping	Develop/implement formal employee training program	Implement MS4 property and operations maintenance	Implement coordination with interconnected MS4s	Develop/implement program to control other sources of pollutants to the MS4	Evaluate additional measures for discharges to impaired waters	Track projects that disconnect DCIA	Develop/implement infrastructure repair/rehab program	Develop/implement plan to identify/prioritize retrofit projects	Develop/implement street sweeping program	Develop/implement catch basin cleaning program	Develop/implement snow management practices	
7-8-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-	2	6-1	6-2	6-3	6-4	6-5	9-9	2-9	8-9	6-9	6-10	6-11	

S-1 Outfall screening S-2 Inventory and mapping of discharge S-3 Follow-up investigations of drainage S-4 Annual monitoring of priority outfalls				
	Monitoring Requirements	Responsible Department/Parties	Measurable Goal	Month/Year of Implementation
		Gary J. Schneider/PW	50% of outfalls screened by deadline, 100% of outfalls screened by end of permit	6-30-2018
	Inventory and mapping of discharges to impaired waters	Gary J. Schneider/PW	Inventory and mapping completed by deadline	6-30-2019
	Follow-up investigations of drainage areas	Gary J. Schneider/PW	Follow-up investigations commenced by deadline	6-30-2019
		Gary J. Schneider/PW	Six outfalls identified and monitored by deadline	6-30-2020