

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Galena

South 1/4 \_\_\_\_\_ Corner of Section 18, Township T104N, Range R32W, 5th P.M.

STATE OF MINNESOTA, County of MARTIN

At the corner location shown on the sketch:

- On 6-22-99 found a 1/2" I.P. ( 4" Deep )  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 6-22-99 Placed a 5/8" X 24" I.R. W/Alum. Cap ( 3" Deep )  
DATE


## SKETCH OF REFERENCE TIES



57.83 North = Steel Fence Post

29.26 North-West =  
Hole in Top West end  
15" Metal Culv.

31.73 North-East =  
Hole in Top East end  
15" Metal Culv.

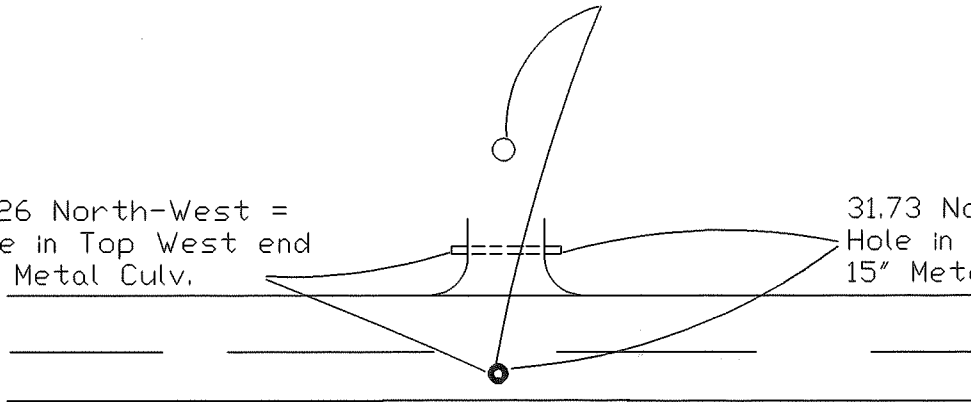

3.5 North = Centerline of Road East-West

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

\_\_\_\_\_  
SIGNATURE DATE

Registration No. \_\_\_\_\_

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of MARTIN

I hereby certify that this document was filed in the Reg. of Deeds office at

\_\_\_\_\_M. on the

\_\_\_\_\_day of \_\_\_\_\_A.D., 19\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

HISTORY  
SOUTH QUARTER CORNER  
SECTION 18, TOWNSHIP 104 NORTH, RANGE 32 WEST  
MARTIN COUNTY, MINNESOTA

The Public Land Survey of Section 18, Township 104 North, Range 32 West of the Fifth Principal Meridian was run in 1857 under the direction of Deputy Surveyor J.O. Brunius. A wooden stake in an earthen mound witnessed by pits was established as the South Quarter Corner of Section 18.

Deputy Surveyor George E. Sawyer (Survey 39-C-18½) recovered a stake in a mound at the South Quarter Corner of Section 18. In 1900, County Surveyor C.T. Montgomery (Survey 59-D-27) renewed the corner with a boulder with chiseled cross.

In September, 1982, a Bolton & Menk, Inc. survey crew found a granite stone with a chiseled cross down 24 inches. An iron pipe was placed over the stone to allow magnetic location of the corner.