

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South
Northeast Corner of Section ¹⁶21, Township 101N, Range 32W, 5th P.M.

STATE OF MINNESOTA, County of Martin


At the corner location shown on the sketch:

On 8/21/80 found a crockery deposit (30" deep)
DATE

left monument as found, lowered monument, removed monument (explain)

On 8/21/80 placed a 2" x 12" pipe in center of crockery deposit (30"
DATE
deep) and placed a 16" x 12" x 6" stone with "+" above crockery deposit
24" deep) and set 3/4" O.D. x 18" iron monument marked with Reg. No. 13593
above the stone "+" (6" deep)

SKETCH OF REFERENCE TIES

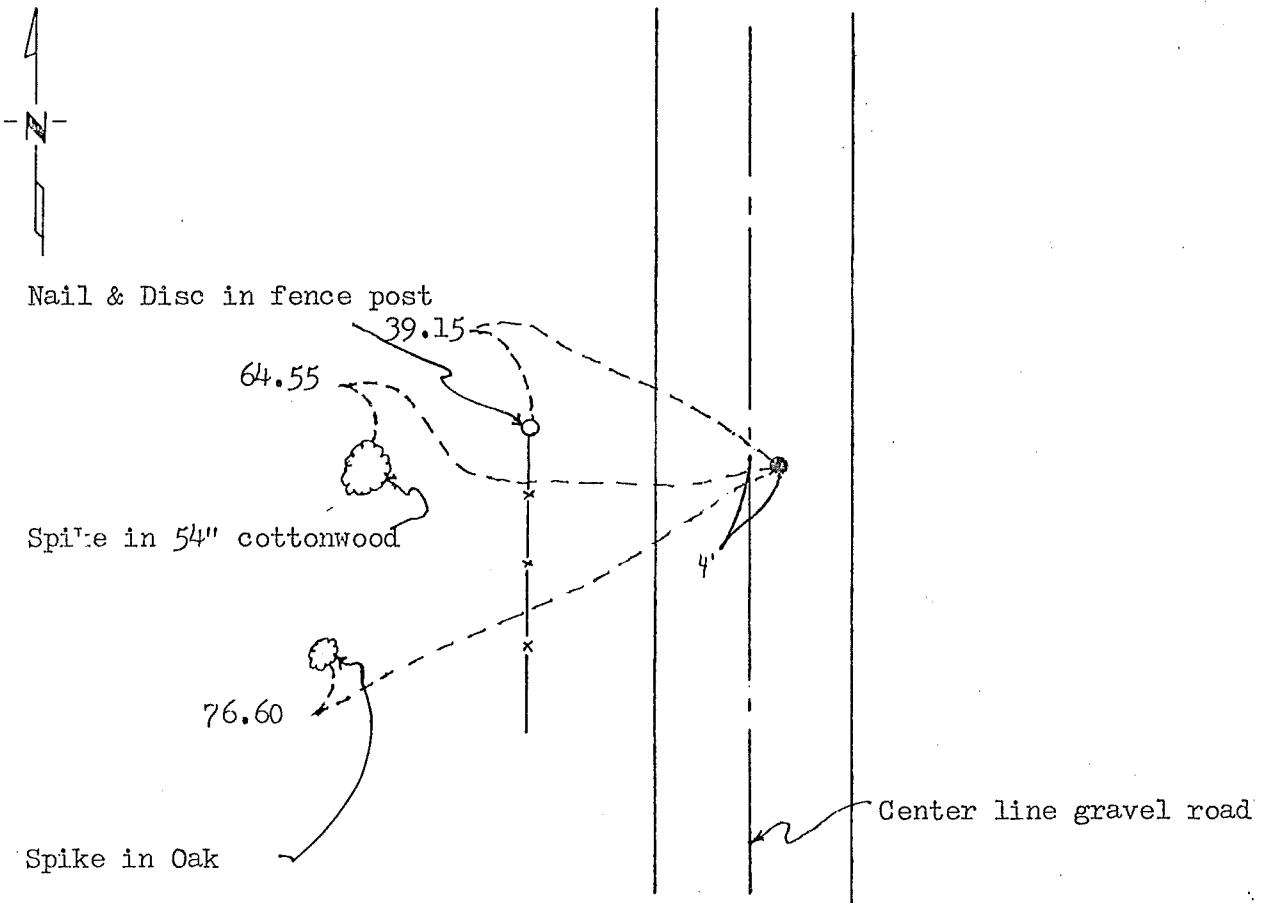

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John Madson 11-22-80
SIGNATURE DATE

Registration No. 13593

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Martin

I hereby certify that this document was filed in the Co. Recorders office at 10:40 A. .M. on the 19th day of August A.D., 19 81

County Recorder David Johnson

By _____, Deputy

DOCUMENT NO. 264270 MICROFILMED

Statement of Evidence:

The corner was originally established during the public land survey completed in 1857.

A survey made by C.T. Montgomery, dated July, 1894, in County Surveyor Book c, page 23, indicated he found an oak stake. He then placed a crockery deposit 16" to 24" deep, and a 16" x 12" x 6" boulder with "+" at the surface.

On August 21, 1980, I excavated with the use of a backhoe and found a crockery deposit (30" deep). I set a 2" x 12" iron pipe in the center of the crockery deposit (30" deep) and placed a 16" x 12" x 6" stone with "+" above crockery deposit (24" deep) and set a 3/4" O.D. x 18" iron monument marked with Reg. No. 13593 above the stone "+" (6" deep).