

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NASHVILLE TWP.

SOUTH QUATER _____ Corner of Section 30, Township 102N^{104N}, Range 29W, 5th P.M.

STATE OF MINNESOTA, County of MARTIN


At the corner location shown on the sketch:

On 5-13-97_{DATE} found a R.R SPIKE IN BITUMINOUS PAVEMENT

left monument as found, lowered monument, removed monument (explain)

On 5-13-97_{DATE} placed a 5/8" * 24" I.R. W/ALUM. CAP (SURFACE).

SKETCH OF REFERENCE TIES

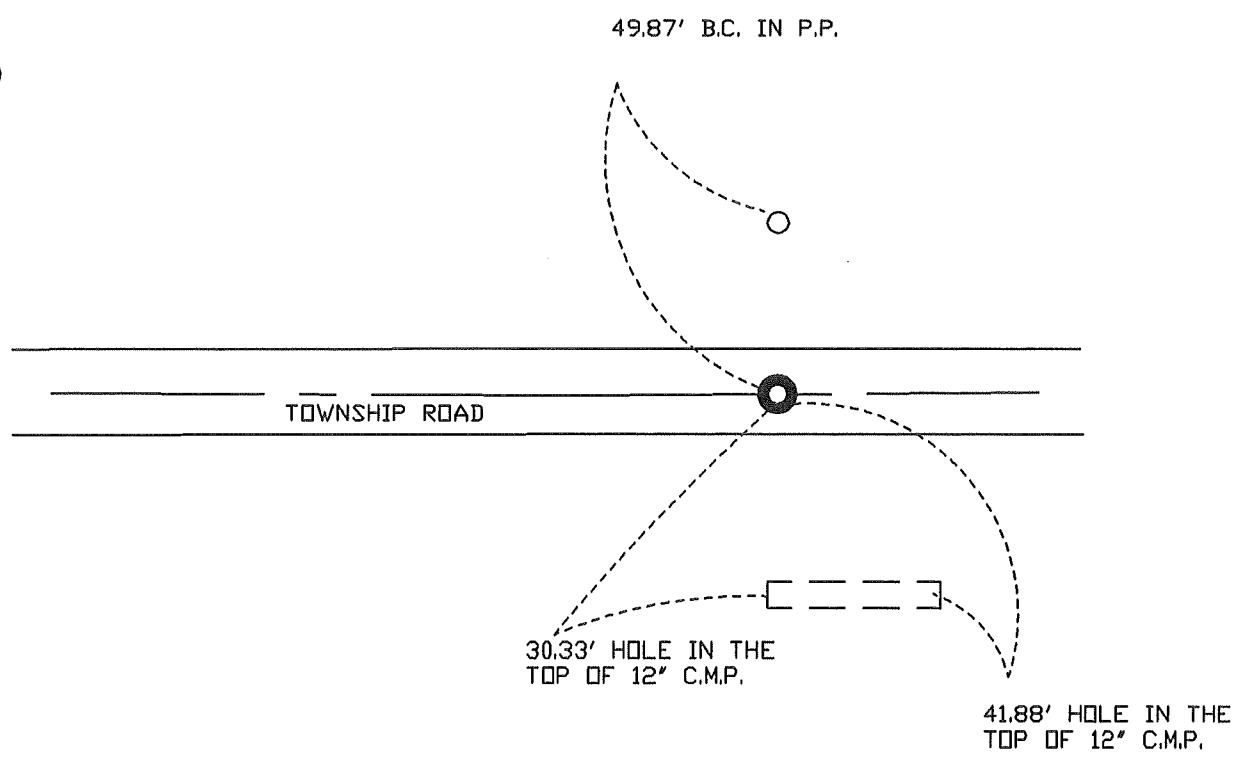

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE _____

Registration No. _____

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____, M. on the _____ day of _____, A.D., 19____

Register of Deeds _____
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Existing ties from the Martin County Highway Dept. were stone "+" (4" deep) with Conc. block over stone "+" (7" deep) 1 $\frac{1}{4}$ " iron pipe (2" deep), 3/4" iron pipe at surface. Ties were 421. S.E. East end 15" C.M.P. 30.4 South & West end of 15" C.M.P., 50.5 North = steel cor. fence post.