

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


S 1/4 Corner of Section 21, Township 101 N, Range 30 W, 5 T H P.M.

STATE OF MINNESOTA, County of MARTIN

At the corner location shown on the sketch:

- On 5-29-96 found a 3/4" x 15" I.R. 3" DEEP
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5-29-96 ~~placed a~~ REPLACED WITH 5/8" x 24" I.R.
DATE WITH ALUMINUM CAP 4" DEEP

SKETCH OF REFERENCE TIES

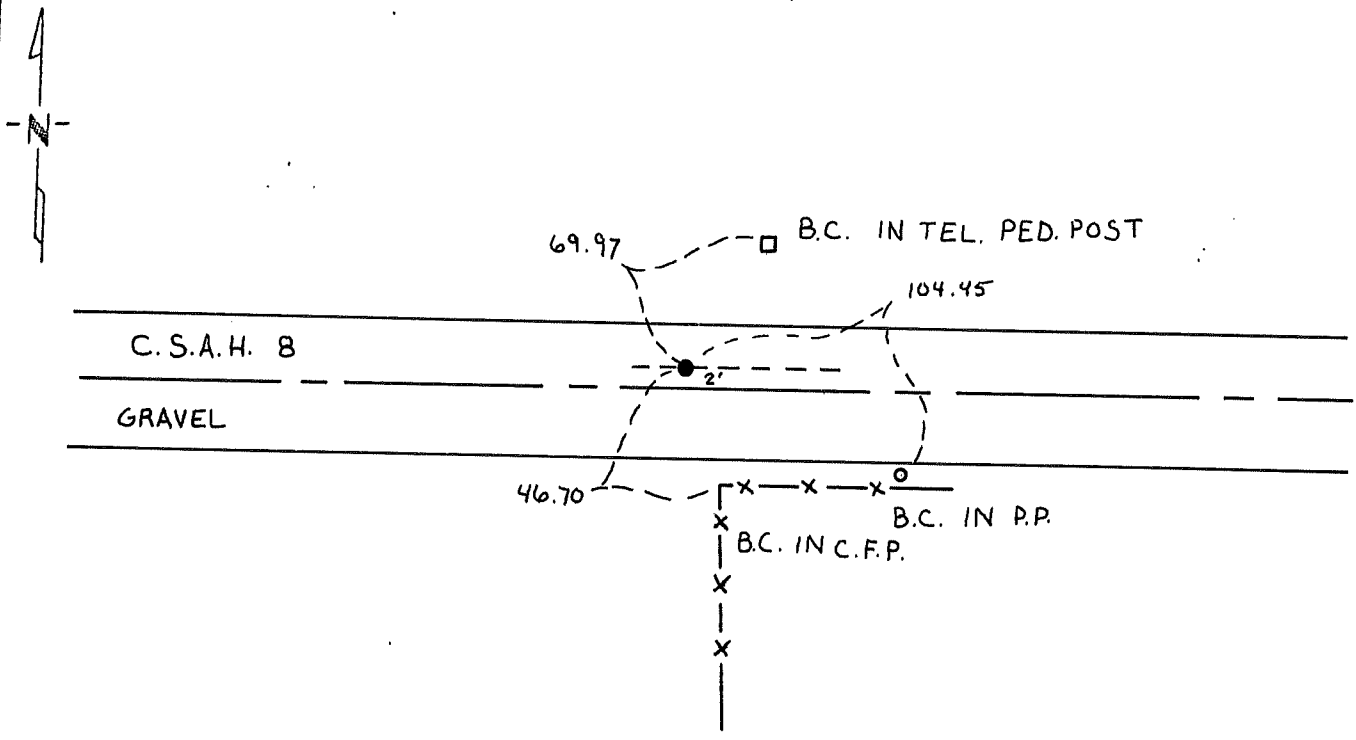

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE

DATE

Registration No. _____

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The corner was originally established during the public land survey which was completed in Silver Lake Township in 1854.

A survey done in May of 1895 by ██████ County Surveyor, George E. Sawyer, identified the corner as a 18" x 14" x 5" hardhead stone protruding 4" above surface and marked with a "+" and $\frac{1}{4}$ " with crockery deposit 24" deep.

A survey done in October of 1911 by ██████ County Surveyor George E. Sawyer, identified the corner and freshened the cross and set another stone 13" x 11" x 6" with "+" above first stone.

The Martin County Highway Department identified the corner as a stone with "+" (49" deep) with ties as follows: 46.05 South=Corner f.p., 149.55 North=Corner f.p., 74.35 Northeast=Tel. pole, 86.75 Southwest=Power pole.

On 10/15/79, I found a $\frac{3}{4}$ " square rod (16" deep)