


44-46 WAINWRIGNL LLC

BLOCK 146, LOT 12
CITY OF PLAINFIELD
UNION COUNTY, NEW JERSEY

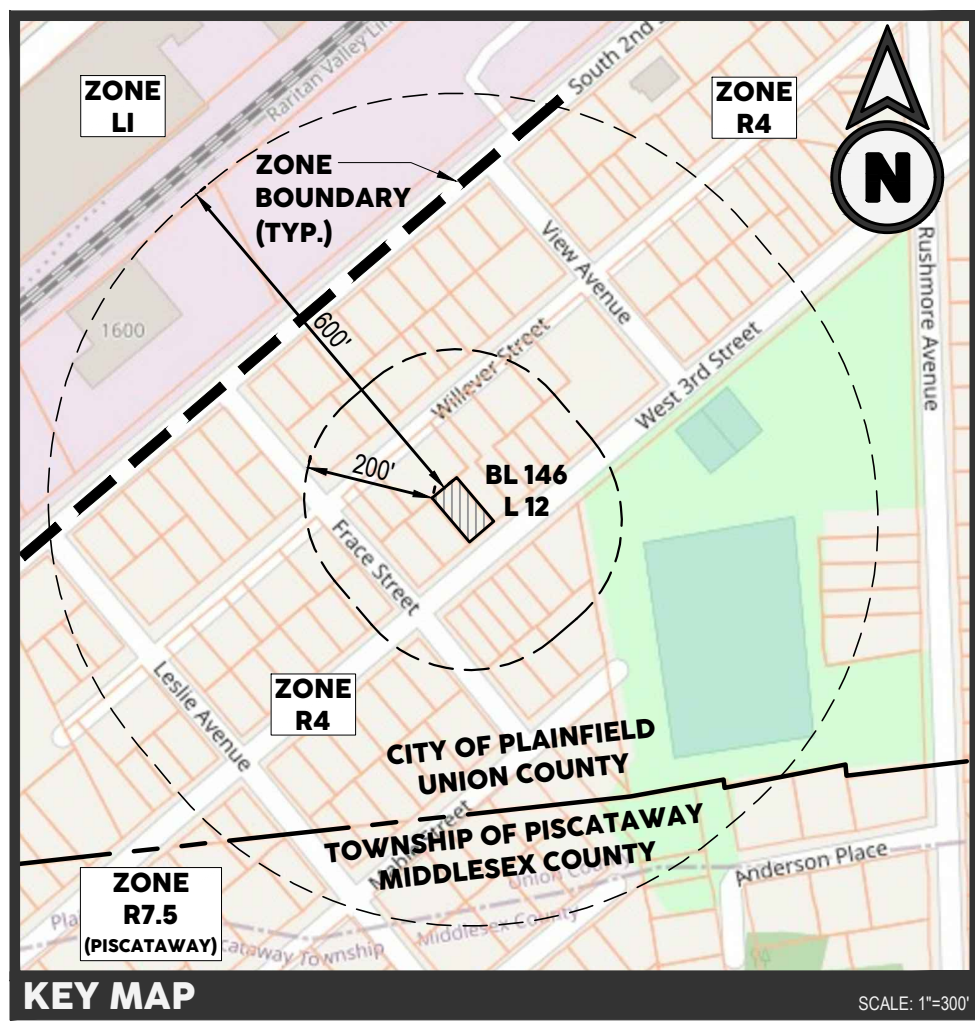

PROPERTY OWNERS WITHIN TWO HUNDRED FEET

BLOCK	LOT	OWNER	BLOCK	LOT	OWNER	BLOCK	LOT	OWNER	BLOCK	LOT	OWNER	BLOCK	LOT	OWNER	BLOCK	LOT	OWNER
144	1	DUQUE, CATHERINE 1537 W 3RD ST PLAINFIELD, NJ 07063	144	7.01	CITY OF PLAINFIELD 515 WATCHUNG AVE PLAINFIELD, NJ 07061	146	3	LEWIS, MARCELLA R 1531 WILVER ST PLAINFIELD, NJ 07063	146	10	LANDERWAY, KELLY 1522 W 3RD ST PLAINFIELD, NJ 07060	147	14	PAOLILLA, SONIA 1518 WILVER ST PLAINFIELD, NJ 07063	149	6	MATTHEWS, JAMES PAUL 1604-1602 W 3RD ST PLAINFIELD, NJ 07063
144	2	OLEA, QUELCA 1535 W 3RD ST PLAINFIELD, NJ 07063	144	15	SHAW, AUSA 1526 MABEL ST PLAINFIELD, NJ 07060	146	4.01	HOBBS, DAVID & SHARON R 1515 WILVER ST PLAINFIELD, NJ 07063	146	11	GARCIA, MILTON 1524 W 3RD ST PLAINFIELD, NJ 07060	147	15	HAMILTON, ASHA 1522 WILVER ST PLAINFIELD, NJ 07060	149	7	SMITH, RASHAWN 1604-1606 W 3RD ST PLAINFIELD, NJ 07063
144	3	GUARADO, JOSE & ALVARADO, ERICKA 1531-1533 W 3RD ST PLAINFIELD, NJ 07063	144	16	GREEN, GERTRUDE 1532 MABEL ST PLAINFIELD, NJ 07063	146	6	ATRA, ABDEL R 1509-1511 WILVER ST PLAINFIELD, NJ 07063	146	13	VAZQUEZ, MARIO SANS ELIAS 1530-1532 W 3RD ST PLAINFIELD, NJ 07063	147	16	DAZ, JOEL I 1526-1528 WILVER ST PLAINFIELD, NJ 07063	150	6	COMACHO, GLORIA E 1601-1603 W 3RD ST PLAINFIELD, NJ 07063
144	4	CERDE, ANN W & BERNARD, LISA 1529 W 3RD ST PLAINFIELD, NJ 07063	144	17	JULIEN, KERVINOUE 809 DRAKE AVE ROSELLE, NJ 07063	146	7	KEYSTONE ENTERPRISES LLC 1504 W 3RD ST PLAINFIELD, NJ 07063	146	14	HARGROVE, DEREK 1532 WILVER ST PLAINFIELD, NJ 07063	147	17	FLORES, DAMAZO MARTIN & ANGELA 1532 WILVER ST PLAINFIELD, NJ 07063			
144	5	PETERSON, CLAUDETTE 1525 W 3RD ST PLAINFIELD, NJ 07063	146	1	BARNETT, HATTIE 1537 WILVER ST PLAINFIELD, NJ 07063	146	8	PANTALEON, VILMA & HECTOR 1514 W 3RD ST PLAINFIELD, NJ 07063	147	12	DURAN, FAUSTO & SILVERIA PEREZ 1512-1514 WILVER ST PLAINFIELD, NJ 07063	148	7	BAVUOS, STEPHANE 1600 WILVER ST PLAINFIELD, NJ 07063			
144	6	SANOTIS, ANGEL T, ET ALLS 1523 W 3RD ST PLAINFIELD, NJ 07063	146	2	PEREZ, CARMEN D 1535 WILVER ST PLAINFIELD, NJ 07063	146	9	CHURCH OF GOD & SAINTS OF CHRIST 1516-1518 W 3RD ST PLAINFIELD, NJ 07063	147	13	FLORES, DAMAZO MARTIN & ANGELA 1516 WILVER ST PLAINFIELD, NJ 07063	149	5	GRUPP, ROBERTA 1601 WILVER ST PLAINFIELD, NJ 07063			

GENERAL NOTES

- LOCATION: BLOCK 146, LOT 12
1526 - 1528 W 3RD STREET
CITY OF PLAINFIELD
UNION COUNTY, NEW JERSEY
TAX MAP SHEET # 141
- OWNER: 44-46 WAINWRIGNL LLC
429 CHESTNUT STREET
ROSELLE PARK, NJ 07204
- APPLICANT: 44-46 WAINWRIGNL LLC
429 CHESTNUT STREET
ROSELLE PARK, NJ 07204
- LOT AREA: 4,500 S.F. (0.103 ACRES)
- ZONE DISTRICT: R4 - MODERATE DENSITY RESIDENTIAL
- EXISTING USE: VACANT
- PROPOSED USE: TWO FAMILY RESIDENTIAL
- INFORMATION SHOWN TRANSFERRED FROM A SURVEY ENTITLED "BOUNDARY & TOPOGRAPHIC SURVEY ST. NO. 1526 - 1528 WEST THIRD STREET TAX LOT 2 BLOCK 449 CITY OF PLAINFIELD, UNION COUNTY, NEW JERSEY", DATED OCTOBER 29, 2021, PREPARED BY WM. DIMARZO & SON, ASSOC., INC.
- PROPOSED BUILDING INFORMATION: AS SHOWN, PER ARCHITECTURAL DRAWINGS ENTITLED, "NEW TWO FAMILY DWELLING FOR 44-46 WAINWRIGNL LLC, BLOCK 146, LOT 12, 1526-1528 W 3RD ST, CITY OF PLAINFIELD, UNION COUNTY, NEW JERSEY 07063" DATED ISSUED FOR RECORD AUGUST 08, 2022, PREPARED BY DANTASCARRETE ARCHITECTURE.
- THE PROPERTY APPEARS ON THE NATIONAL FLOOD INSURANCE PROGRAM - FIRM FLOOD INSURANCE RATE MAP, UNION COUNTY, NEW JERSEY, MAP NUMBER 34039C0038F, EFFECTIVE DATE SEPTEMBER 20, 2006. SUBJECT SITE IS LOCATED WITHIN ZONE X (AREA OF MINIMAL FLOOD HAZARD).
- UNDERGROUND UTILITIES SHOWN HEREON ARE APPROXIMATE. THEIR ACCURACY OR COMPLETENESS ARE NOT GUARANTEED BY THE ENGINEER. MARK CUTS FROM UTILITY COMPANIES AND FIELD CONFIRMATION BY CONTRACTOR MUST BE MADE PRIOR TO CONSTRUCTION SO THAT DISTURBANCE AND/OR DISRUPTION TO THESE UTILITIES MAY BE AVOIDED.
- REMOVAL OF CURBING SHALL INCLUDE CONCRETE GUTTER, REMOVAL AND REPLACEMENT OF CURBING AND GUTTERS SHALL BE DONE FROM JOINT TO JOINT. NO SAW CUTTING OF THE CURB AND/OR GUTTER IS PERMITTED.
- ALL REPLACEMENT OF CURBING AND GUTTERS SHALL BE DONE FROM JOINT TO JOINT. NO SAW CUTTING OF THE CURB AND/OR GUTTER IS PERMITTED.

ZONING TABULATION

ZONING DISTRICT:	R-4 (MODERATE DENSITY RESIDENTIAL) - ZONING SHOWN FOR TWO FAMILY			
	REQUIRED/ALLOWED	EXISTING LOT 12	PROPOSED LOT 12	VARIANCE REQUESTED, PENC
MINIMUM LOT AREA	10,000 S.F.	4,500 S.F.*	4,500 S.F. (V)	VARIANCE REQUESTED, PENC
MAXIMUM DENSITY (D.U./ACRE)	8.7	-	19.4 (V)	VARIANCE REQUESTED
MINIMUM LOT WIDTH	80 FT.	50.0 FT.*	50.0 FT. (V)	VARIANCE REQUESTED, PENC
MINIMUM LOT FRONTAGE	80 FT.	50.0 FT.*	50.0 FT. (V)	VARIANCE REQUESTED, PENC
MINIMUM LOT DEPTH	100 FT.	90.0 FT.*	90.0 FT. (V)	VARIANCE REQUESTED, PENC
MINIMUM FRONT YARD SETBACK	25 FT.	-	17.1 FT. (V)	VARIANCE REQUESTED
MINIMUM SIDE YARD SETBACK	10 FT.	-	4.4 FT. (V)	VARIANCE REQUESTED
MINIMUM SIDE YARD SETBACK COMBINED	25 FT.	-	18.5 FT. (V)	VARIANCE REQUESTED
MINIMUM REAR YARD SETBACK	30 FT.	-	20.3 FT. (V)	VARIANCE REQUESTED
MAXIMUM FLOOR AREA RATIO	N/A	N/A	N/A	
MAXIMUM % BUILDING COVERAGE	25%	-	31.3% (V)	VARIANCE REQUESTED
MAXIMUM % TOTAL LOT COVER	40%	-	63.0% (V)	VARIANCE REQUESTED
MAXIMUM BUILDING HEIGHT	35 FT.	-	33.7 FT.	
MAXIMUM NUMBER OF STORIES	2.5	-	2	
MINIMUM IMPROVABLE LOT AREA	2,400 S.F.	875 S.F.*	875 S.F. (V)	VARIANCE REQUESTED, PENC
M.I.A. - DIAMETER OF CIRCLE	34 FT.	25.0 FT.*	25.0 FT. (V)	VARIANCE REQUESTED, PENC

* PRE-EXISTING NONCONFORMITY
(V) VARIANCE REQUESTED

BUILDING COVERAGE TABULATION




EXISTING BUILDING COVERAGE	PROPOSED LOT COVERAGE
NO STRUCTURES PRESENT	DWELLING - GROUND FL. 1,411 S.F. TOTAL 1,411 S.F. (1,411 S.F. / 4,500 S.F. = 0.313) 31.3%

LOT COVERAGE TABULATION

EXISTING LOT COVERAGE	PROPOSED LOT COVERAGE
NO STRUCTURES PRESENT	DWELLING/OVERHANGS 1,485 S.F. STEPS, WALKS, PADS 133 S.F. PAVEMENT 1,218 S.F. TOTAL 2,836 S.F. (2,836 S.F. / 4,500 S.F. = 0.630) 63.0%

VARIANCES REQUESTED

SECTION	DESCRIPTION
17-9-D	A MINIMUM LOT AREA OF 10,000 S.F. FOR A TWO-FAMILY DWELLING IS REQUIRED; WHEREAS A LOT AREA OF 4,500 S.F. IS PROPOSED. THIS IS A PRE-EXISTING NONCONFORMING CONDITION WHICH IS NOT BE EXACERBATED.
17-9-8-D	A DENSITY NOT TO EXCEED 8.7 DWELLING UNITS PER ACRE FOR A TWO-FAMILY DWELLING IS PERMITTED; WHEREAS A DENSITY OF 19.4 DWELLING UNITS PER ACRES IS PROPOSED.
17-9-8-D	A MINIMUM LOT WIDTH OF 80 FT. IS REQUIRED FOR A TWO-FAMILY DWELLING; WHEREAS A LOT WIDTH OF 50.0 FT. IS PROPOSED. THIS IS A PRE-EXISTING NONCONFORMING CONDITION WHICH IS NOT BE EXACERBATED.
17-9-8-D	A MINIMUM LOT FRONTAGE OF 80 FT. IS REQUIRED FOR A TWO-FAMILY DWELLING; WHEREAS A LOT FRONTAGE OF 50.0 FT. IS PROPOSED. THIS IS A PRE-EXISTING NONCONFORMING CONDITION WHICH IS NOT BE EXACERBATED.
17-9-8-D	A MINIMUM LOT DEPTH OF 100 FT. IS REQUIRED FOR A TWO-FAMILY DWELLING; WHEREAS A LOT AREA OF 90.0 FT. IS PROPOSED. THIS IS A PRE-EXISTING NONCONFORMING CONDITION WHICH IS NOT BE EXACERBATED.
17-9-8-D	A MINIMUM FRONT YARD SETBACK OF 25 FEET IS REQUIRED; WHEREAS A FRONT YARD SETBACK OF 17.1 FT. IS PROPOSED.
17-9-8-D	A MINIMUM SIDE YARD SETBACK OF 10 FEET IS REQUIRED; WHEREAS A SIDE YARD SETBACK OF 4.4 FT. IS PROPOSED.
17-9-8-D	A MINIMUM COMBINED SIDE YARD SETBACK OF 25 FEET IS REQUIRED; WHEREAS A COMBINED SIDE YARD SETBACK OF 18.5 FT. IS PROPOSED.
17-9-8-D	A MINIMUM REAR YARD SETBACK OF 30 FEET IS REQUIRED; WHEREAS A REAR YARD SETBACK OF 20.3 FT. IS PROPOSED.
17-9-8-D	A MAXIMUM BUILDING COVERAGE OF 25% IS PERMITTED; WHEREAS A BUILDING COVERAGE OF 31.3% IS PROPOSED.
17-9-8-D	A MAXIMUM LOT COVERAGE OF 40% IS PERMITTED; WHEREAS A LOT COVERAGE OF 63.0% IS PROPOSED.
17-9-8-D	A MINIMUM IMPROVABLE LOT AREA OF 2,400 S.F. IS REQUIRED FOR A TWO-FAMILY DWELLING; WHEREAS AN IMPROVABLE LOT AREA OF 875 S.F. IS PROPOSED. THIS IS A PRE-EXISTING NONCONFORMING CONDITION WHICH IS NOT BE EXACERBATED.
17-9-42	A MINIMUM LOT CIRCLE OF 34 FT. IS REQUIRED FOR A TWO-FAMILY DWELLING; WHEREAS A LOT CIRCLE OF 25.0 FT. IS PROPOSED. THIS IS A PRE-EXISTING NONCONFORMING CONDITION WHICH IS NOT BE EXACERBATED.

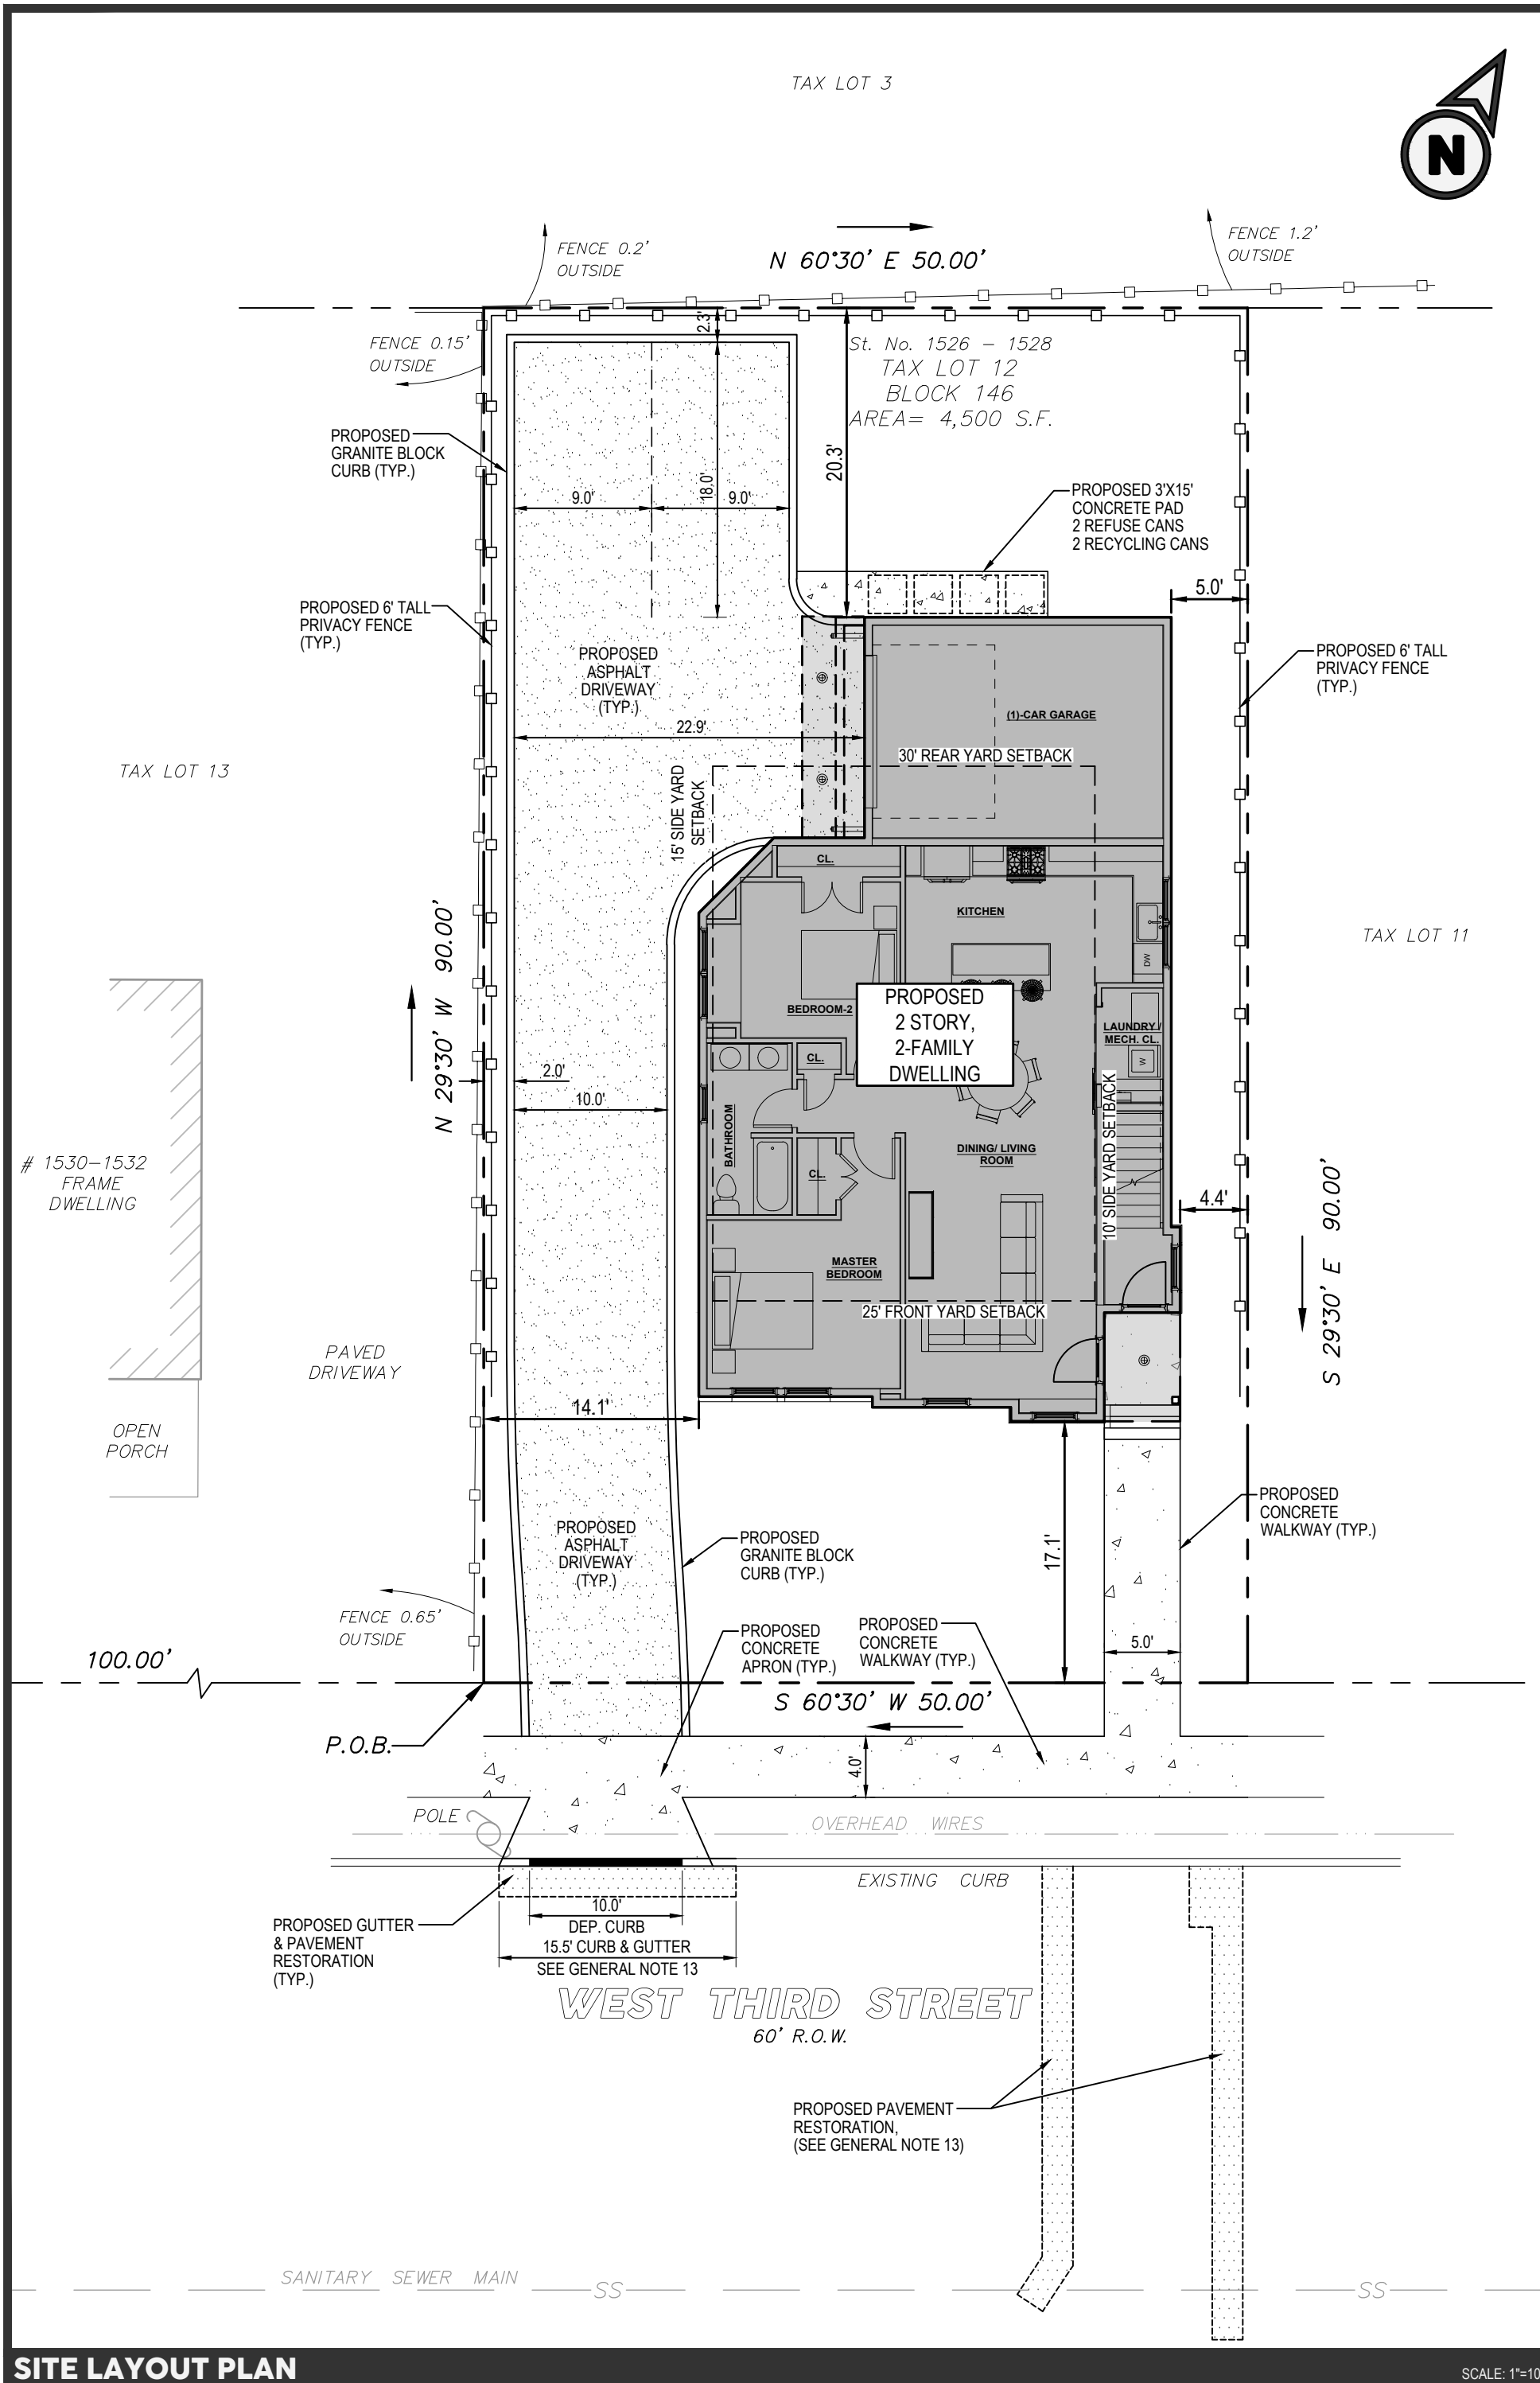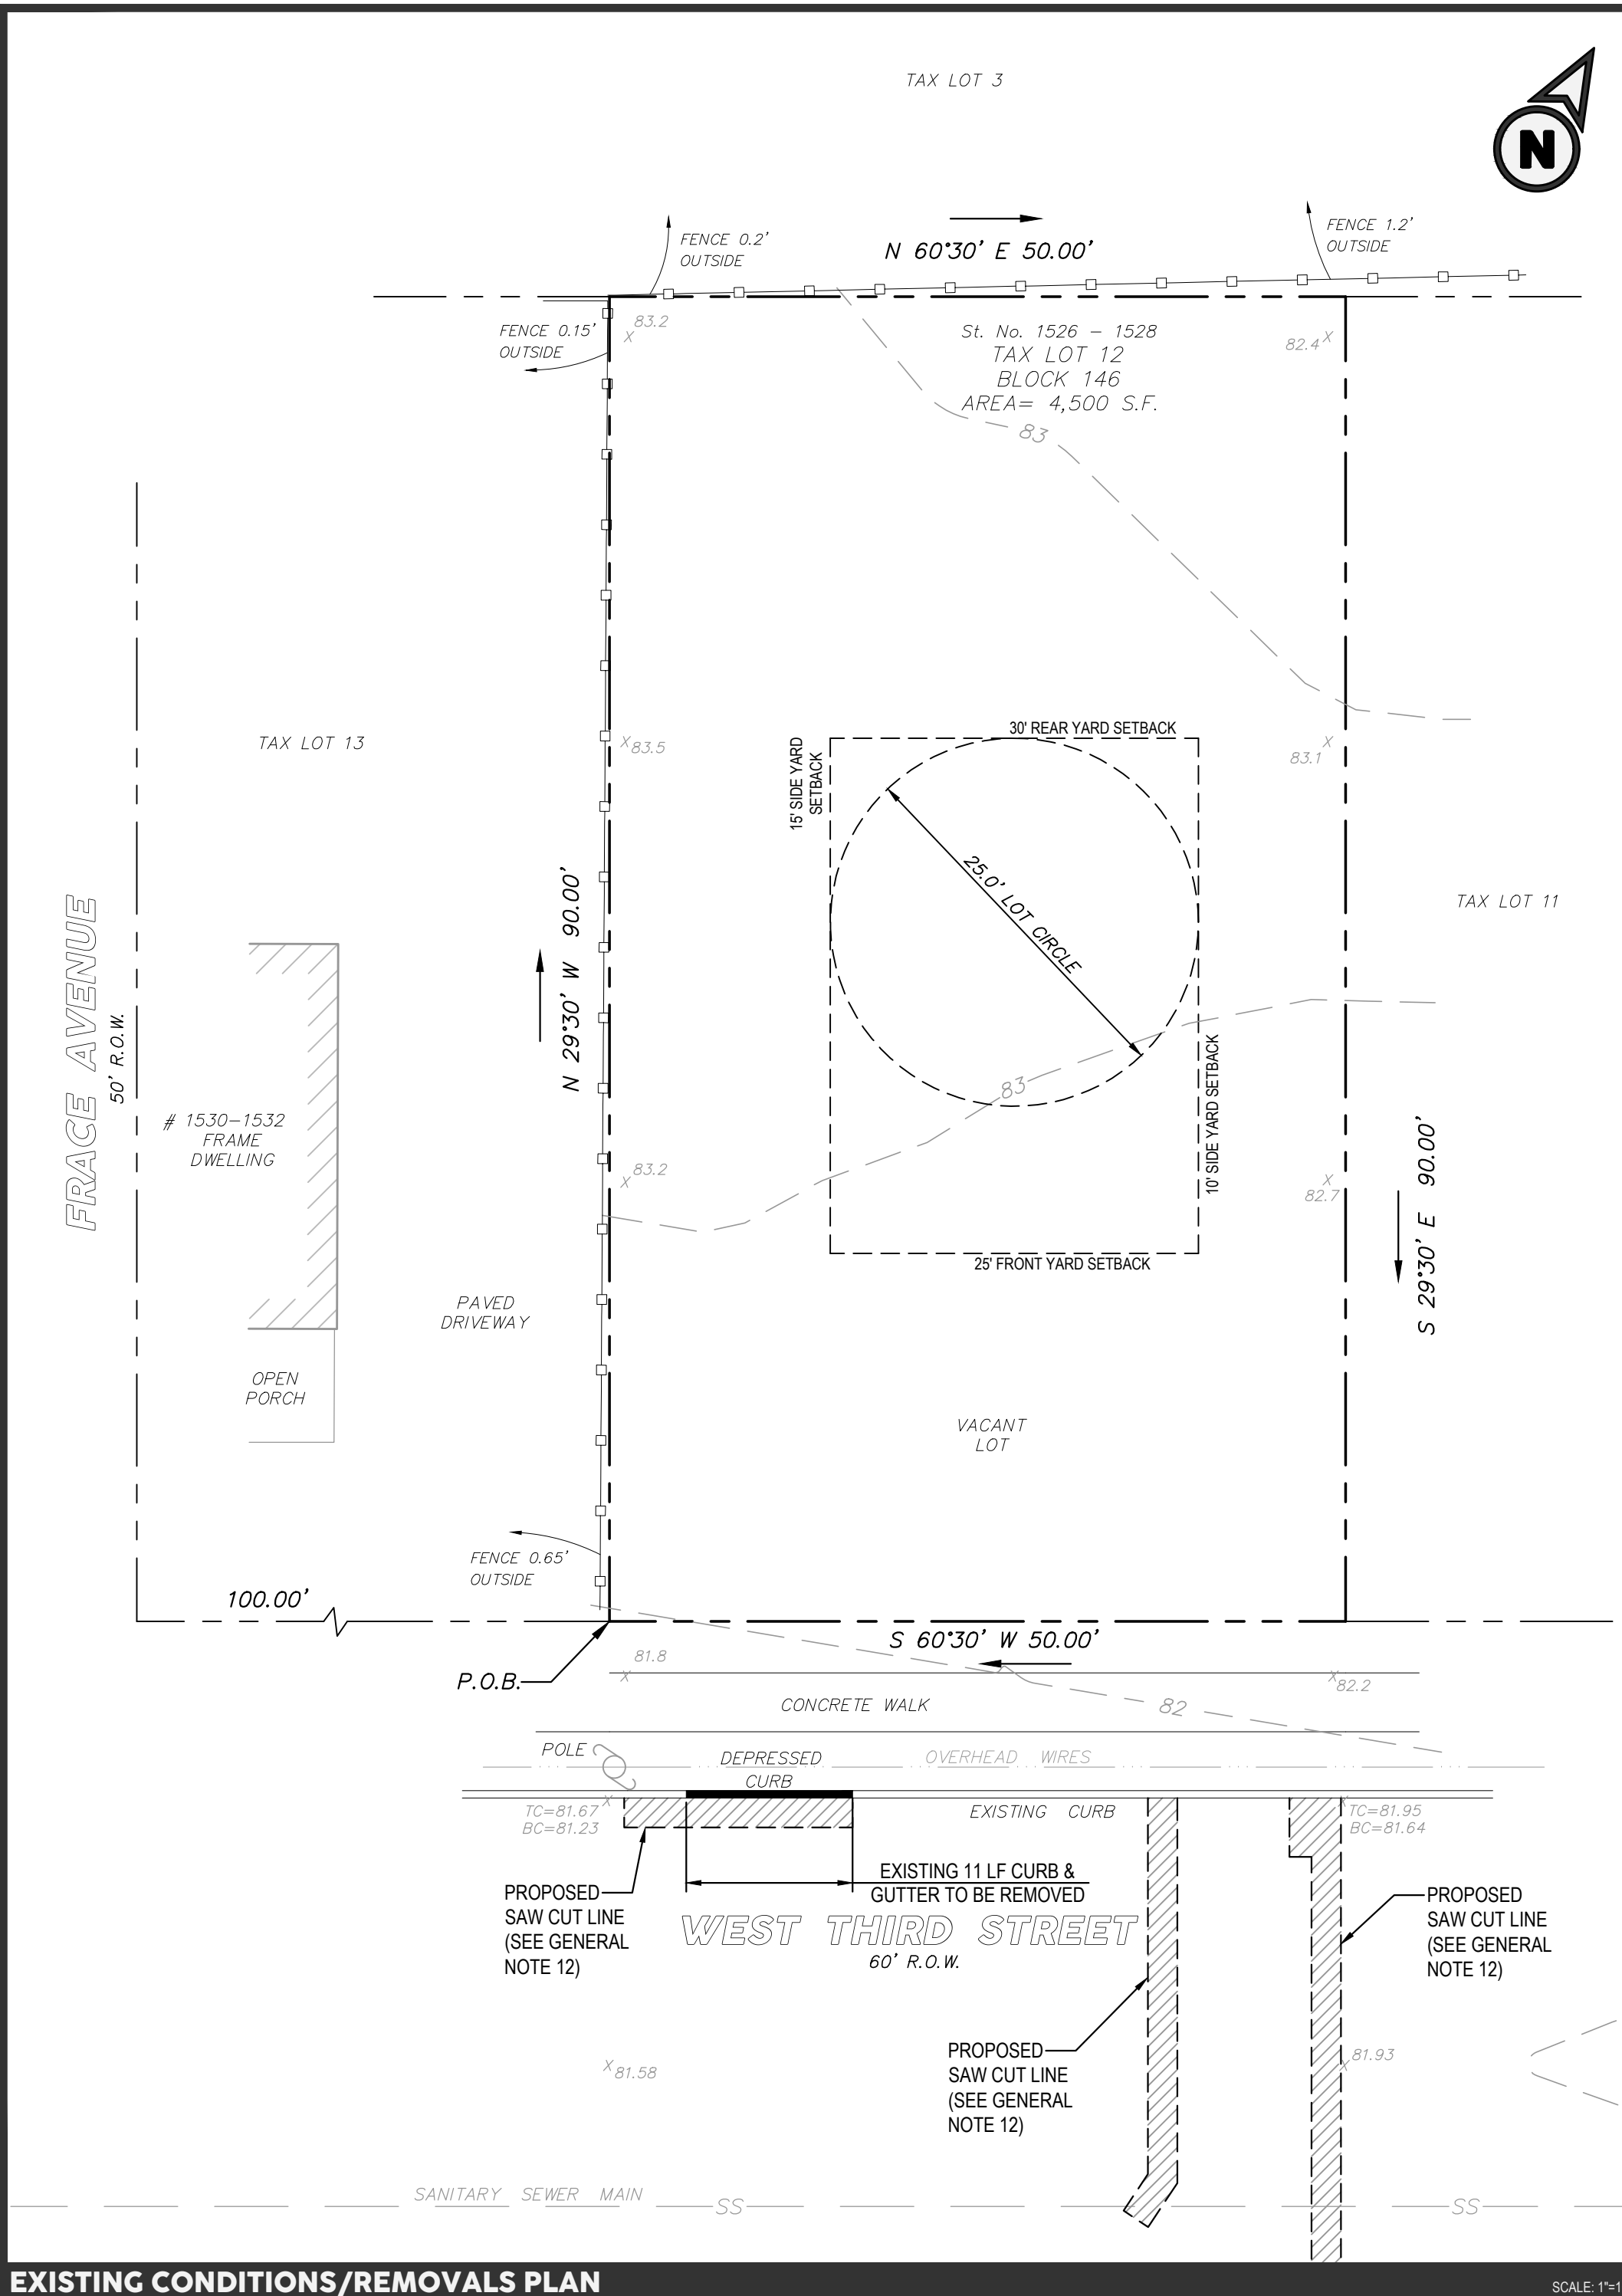

revisions	01.	05.20.2022	revised per completeness letter
	02.	07.19.2022	general revisions
	03.	08.12.2022	general revisions

manTERRA
DESIGN LLC



44-46
WAINWRIGNL
LLC

BLOCK 146, LOT 12
1526-1528 W 3RD STREET
CITY OF PLAINFIELD
UNION COUNTY, NEW JERSEY

OVERALL PLAN






Giovanni Manilio, PE
NEW JERSEY PROFESSIONAL ENGINEER #47552

manTERRA
DESIGN LLC

drawn by jam date 02.01.2022
checked by jam scale as shown

po box 275
somerville, nj 08876
908.800.5500
manterradesign.com
certificate of authorization: 24GA28327100

1

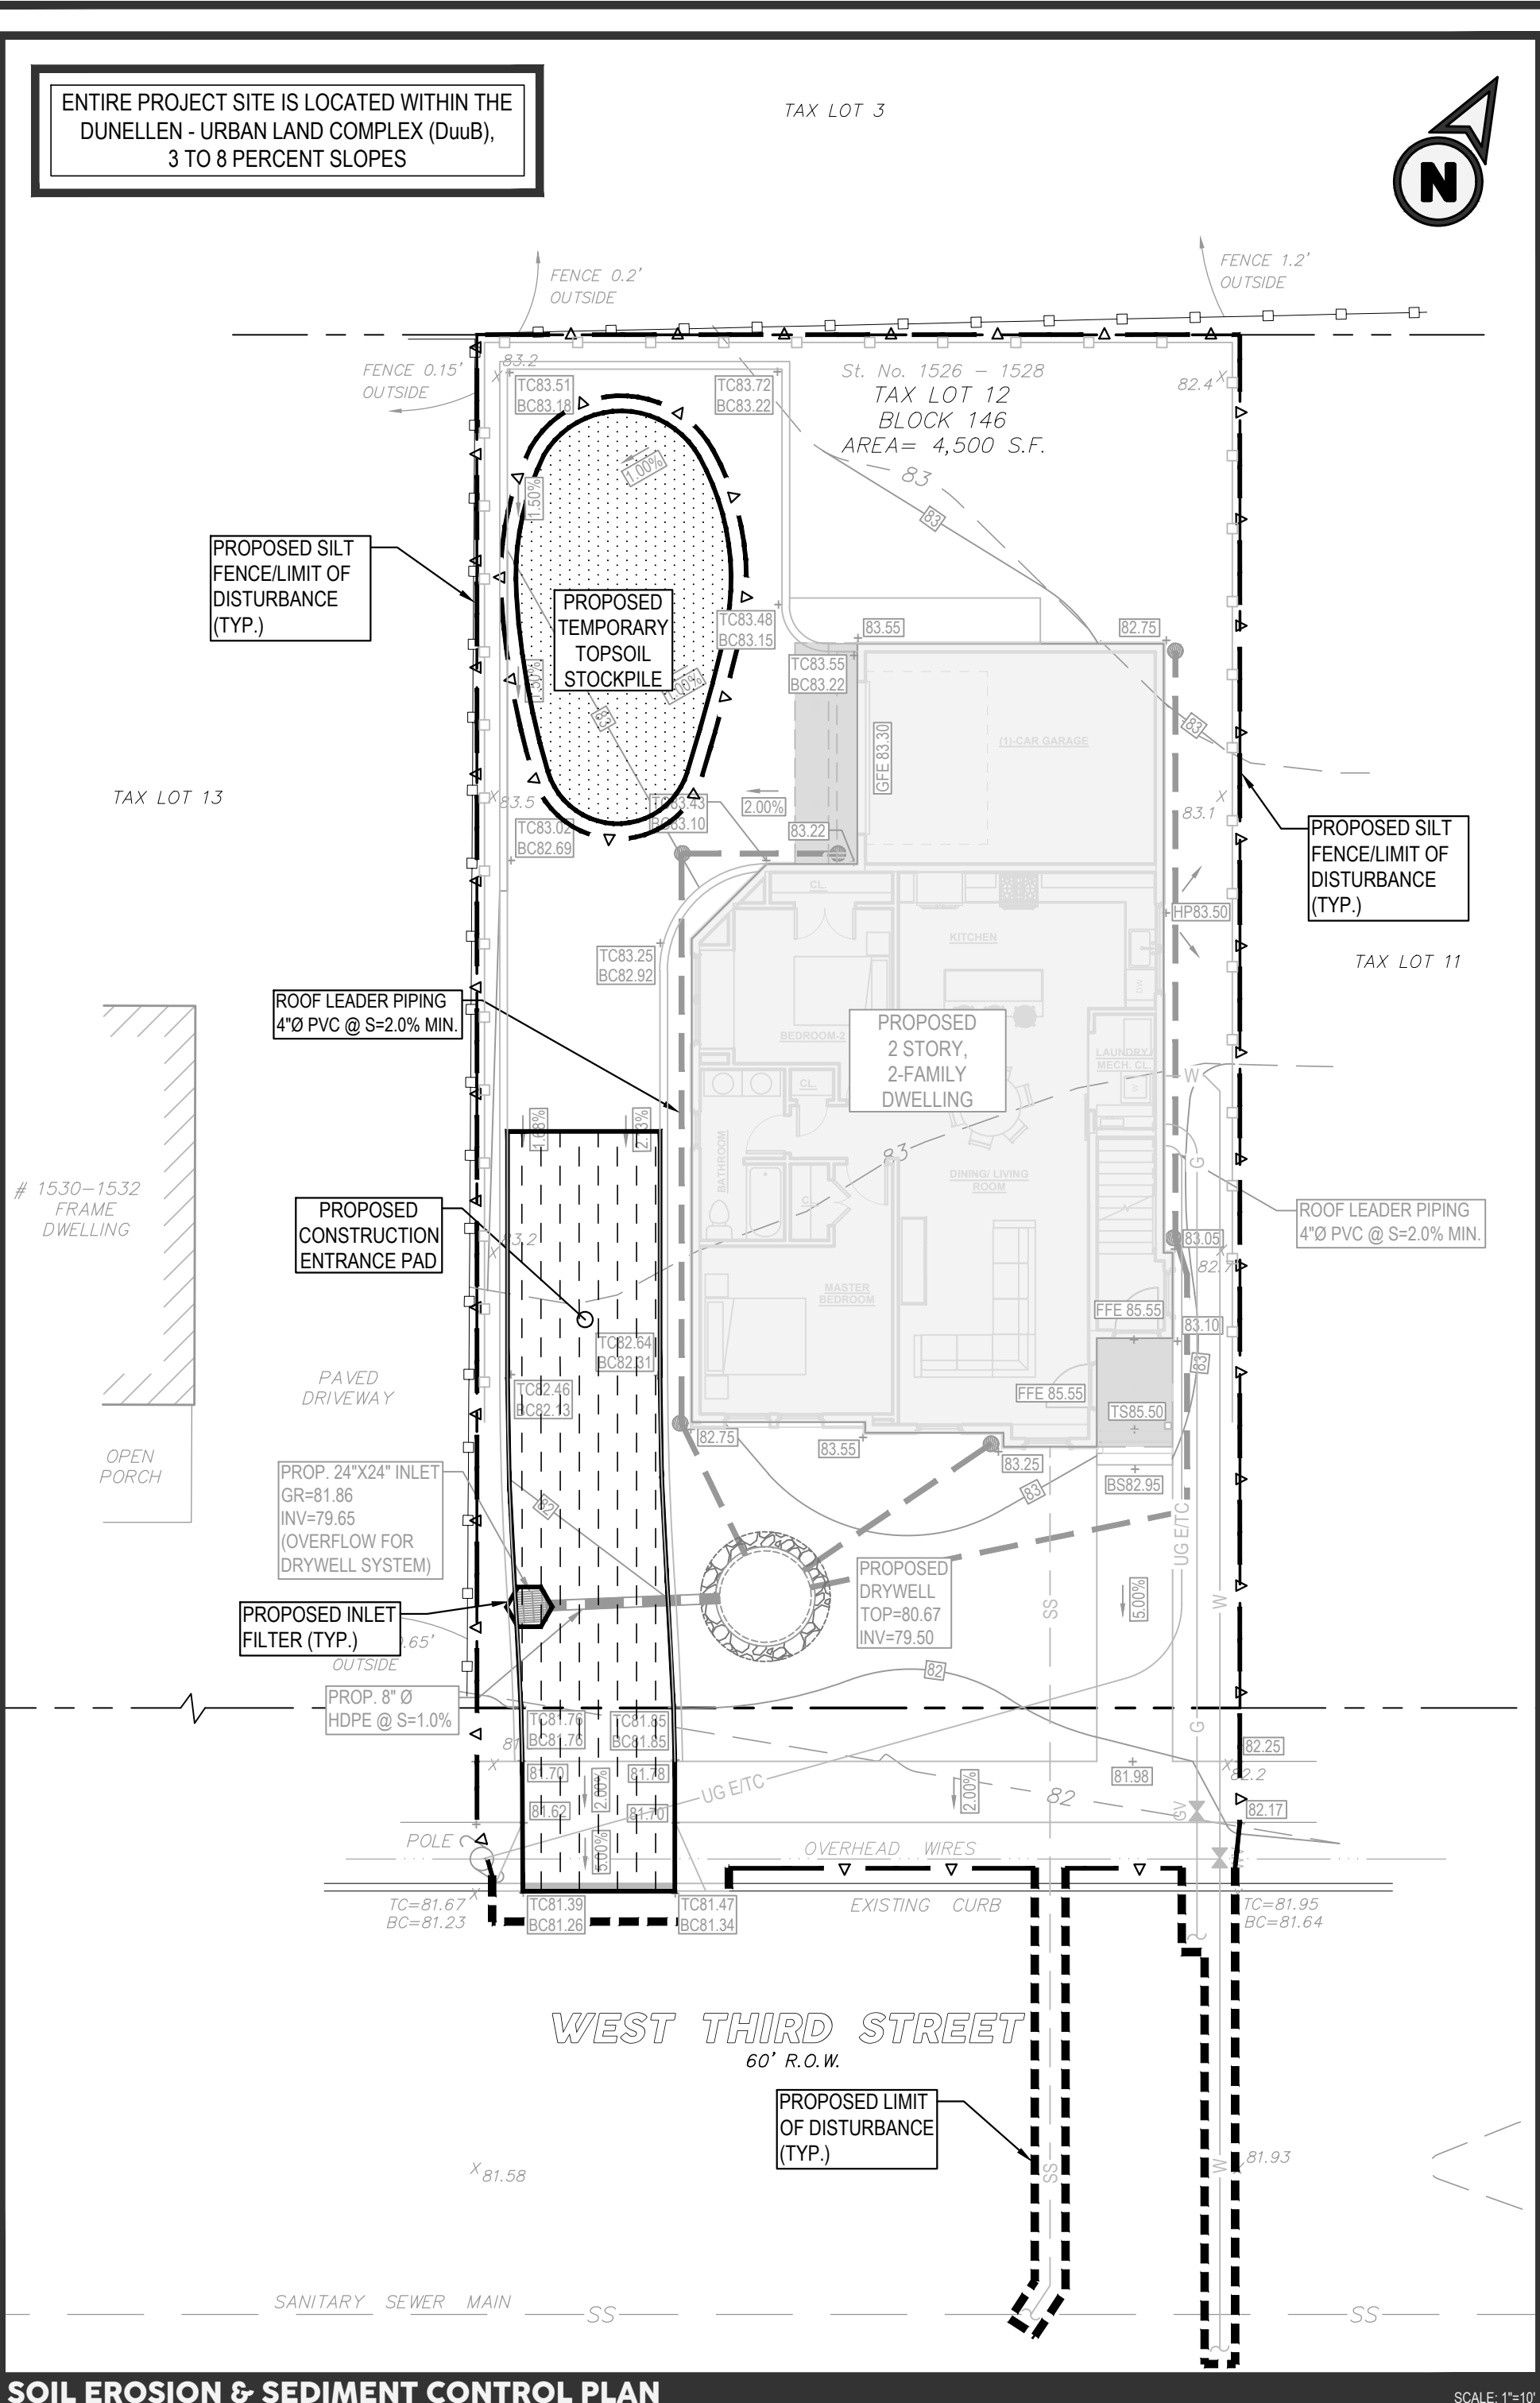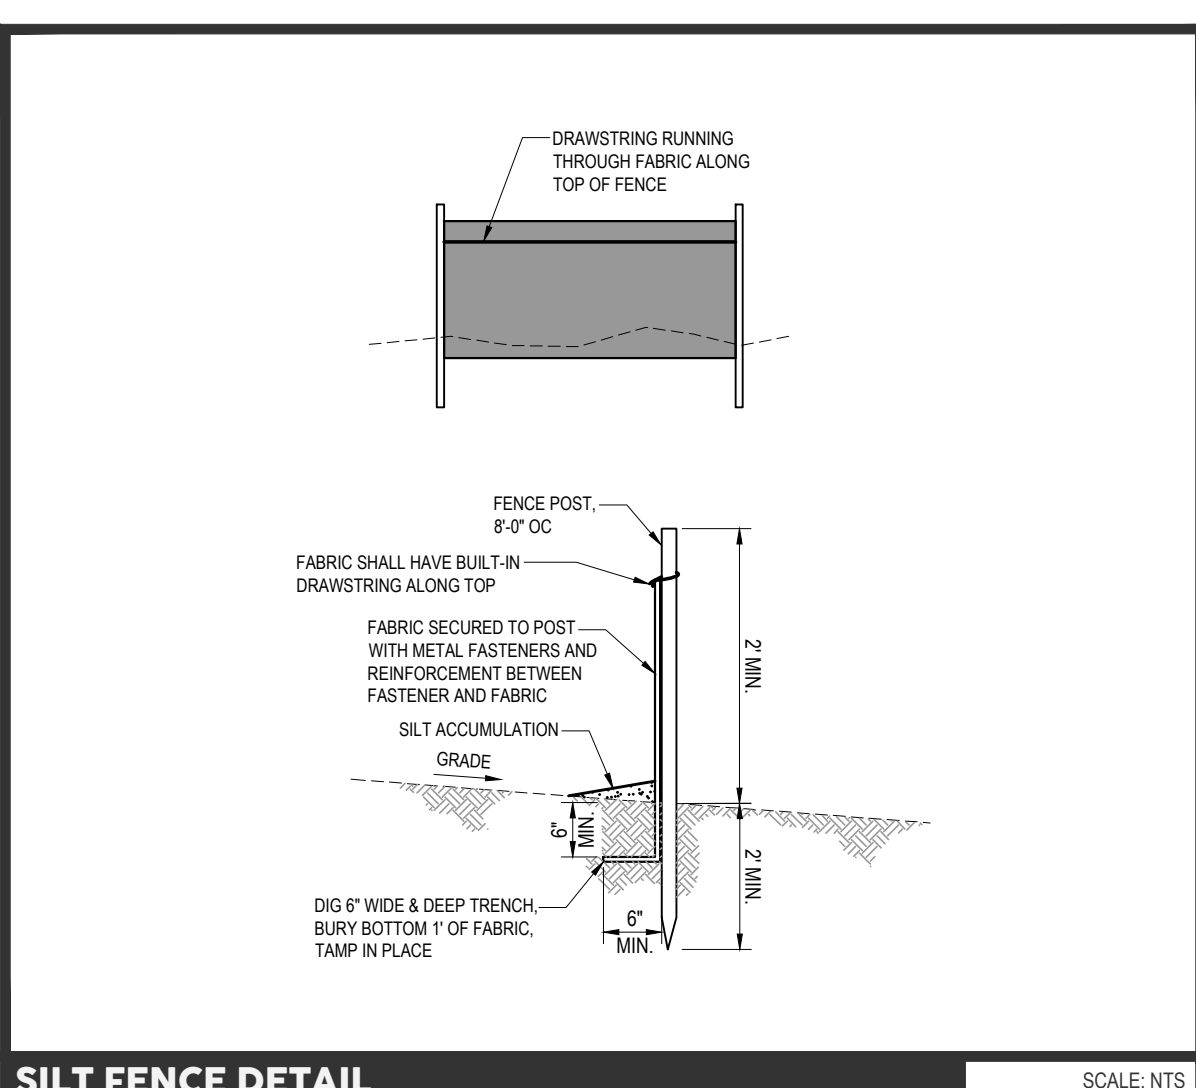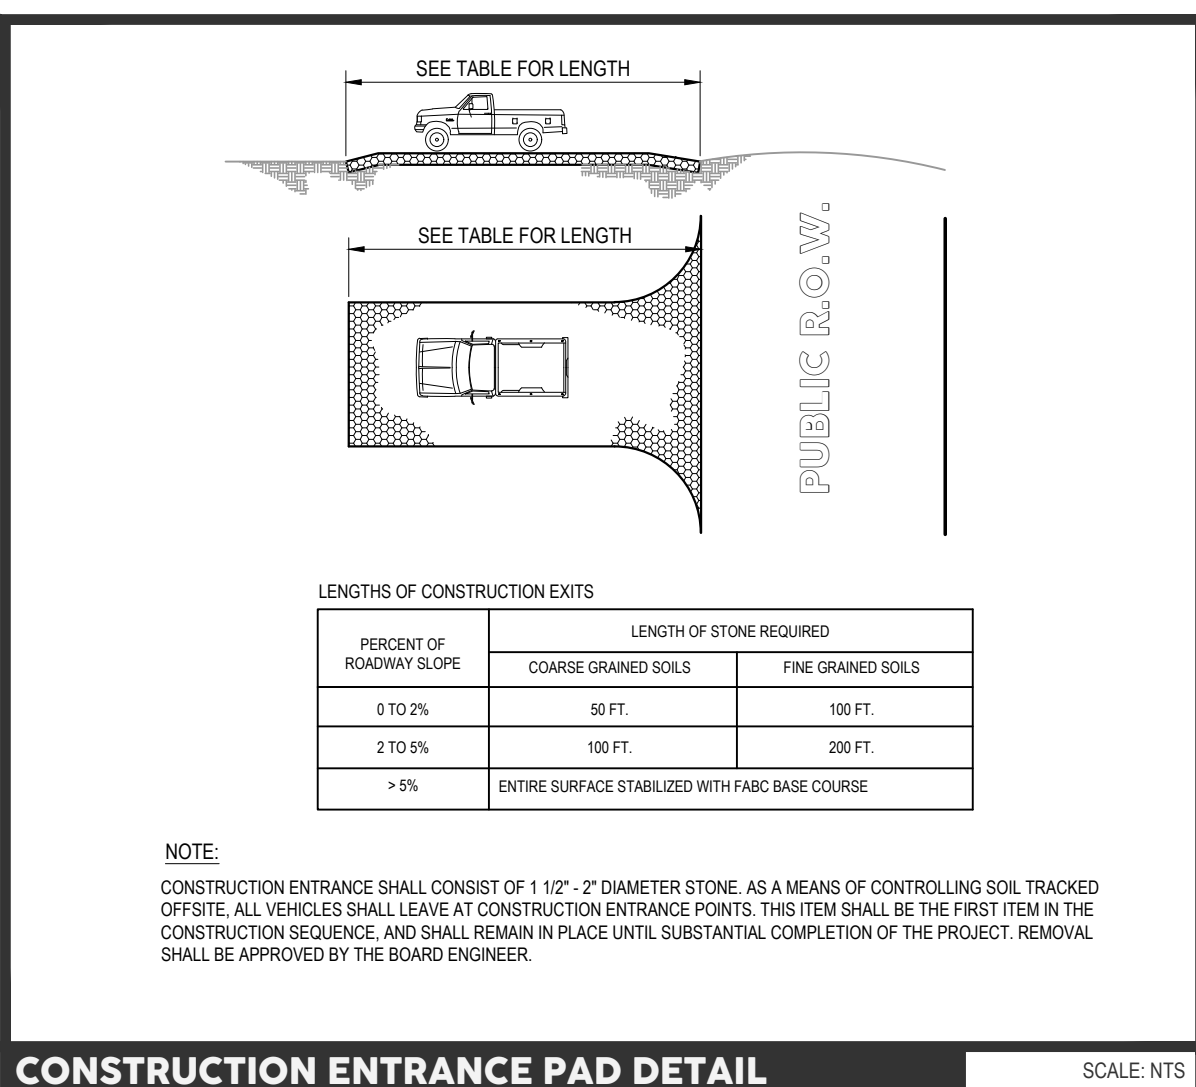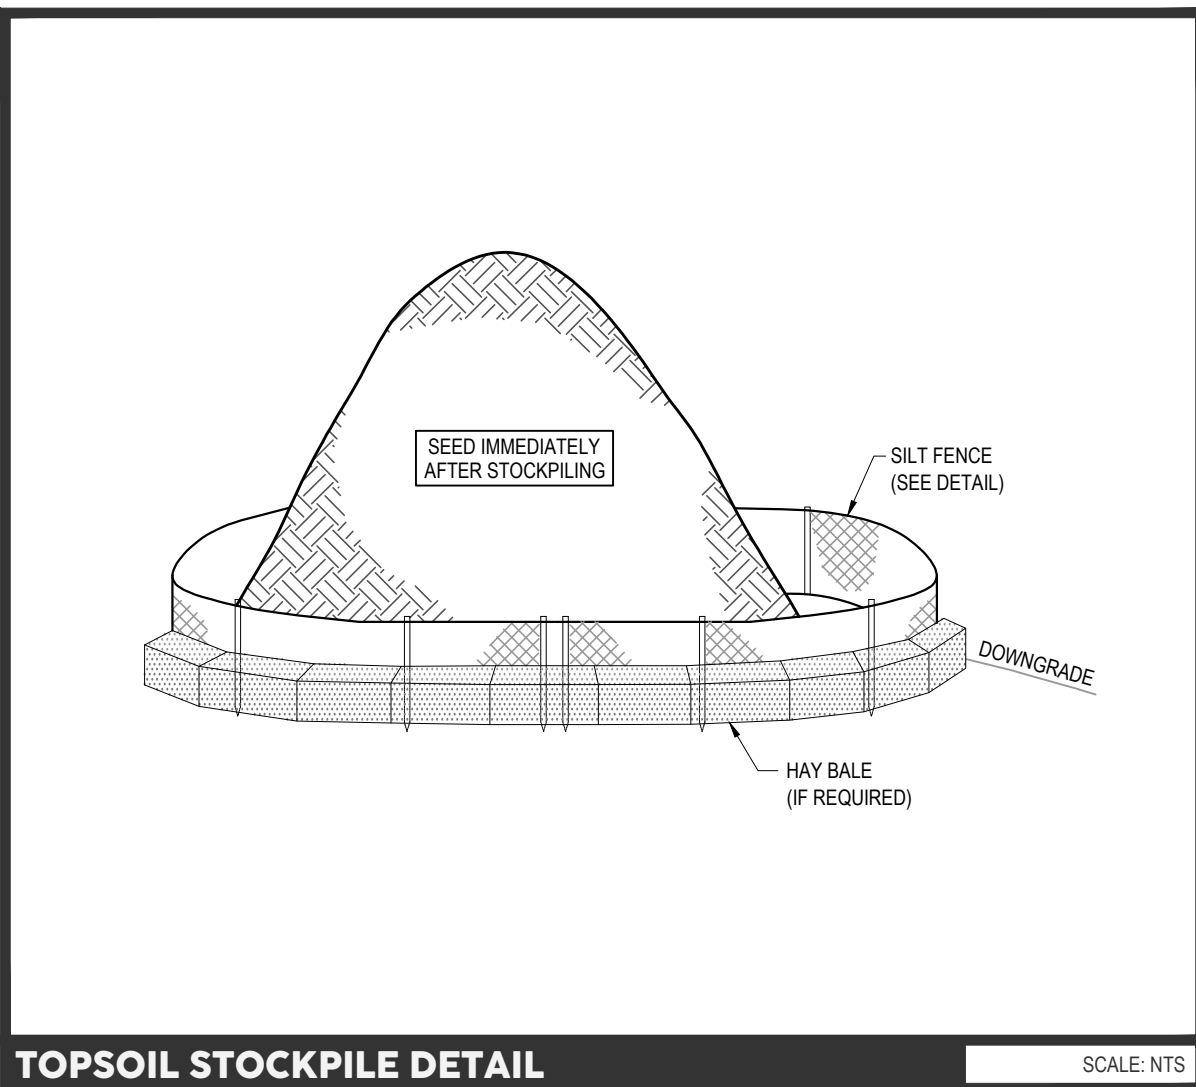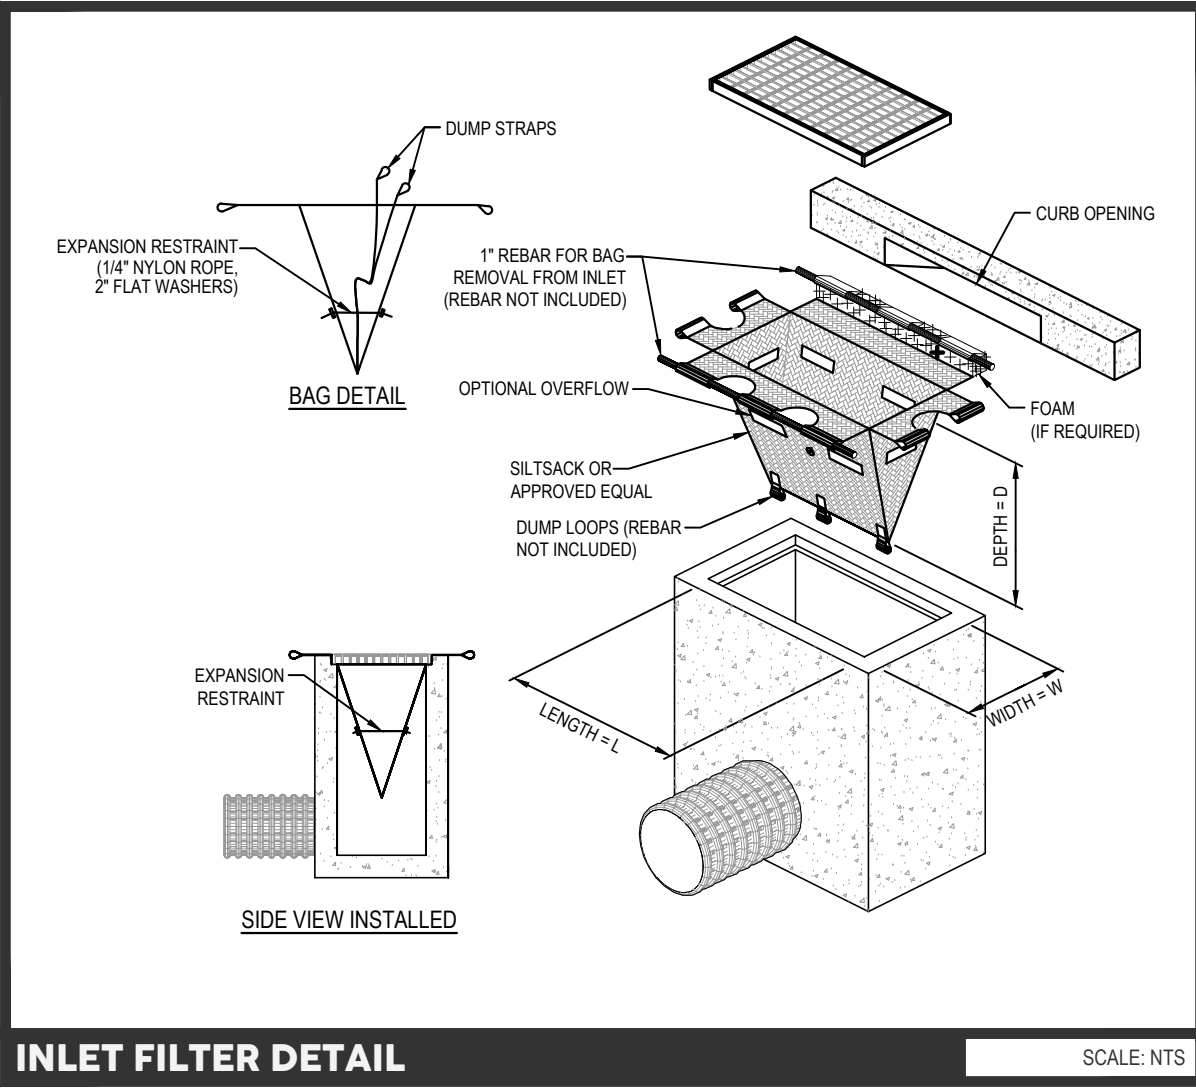

GENERAL NOTES

- INFORMATION SHOWN TRANSFERRED FROM A SURVEY ENTITLED "OUTBOUND & TOPOGRAPHIC SURVEY PREPARED FOR SPOONER AVENUE, LOTS 19 & 20, BLOCK 110, SITUATED IN THE CITY OF PLAINFIELD, UNION COUNTY, NEW JERSEY," DATED MARCH 3, 2021, PREPARED BY CLEARPOINT SERVICES, LLC.
- THE PROPERTY APPEARS ON THE NATIONAL FLOOD INSURANCE PROGRAM - FIRM FLOOD INSURANCE RATE MAP, SOMERSET COUNTY, NEW JERSEY, PANEL 161 OF 301, MAP NUMBER 30050C016, EFFECTIVE DATE SEPTEMBER 2007. SUBJECT SITE IS LOCATED WITHIN ZONE X (AREA OF MINIMAL FLOOD HAZARD).
- UNDERGROUND UTILITIES SHOWN HEREON ARE APPROXIMATE. THEIR ACCURACY OR COMPLETENESS ARE NOT GUARANTEED BY THE ENGINEER. MARK OUTS FROM UTILITY COMPANIES AND FIELD CONFIRMATION BY CONTRACTOR MUST BE MADE PRIOR TO CONSTRUCTION SO THAT DISTURBANCE AND/OR DISRUPTION TO THESE UTILITIES MAY BE AVOIDED.

SEQUENCE OF CONSTRUCTION:

NOTIFY THE SOIL CONSERVATION DISTRICT WITH WRITTEN NOTIFICATION 48 HOURS PRIOR TO ANY LAND DISTURBANCE AND CONDUCT PRE-CONSTRUCTION MEETING.	2 DAYS
INSTALL SILT FENCE AS DEPICTED ON SOIL EROSION AND SEDIMENT CONTROL PLAN.	2 DAYS
CLEAR SITE AND STRIP TOPSOIL AND STORE FOR FUTURE USE.	2 DAYS
INSTALL STONE TRACKING PAD AS DEPICTED ON SOIL EROSION AND SEDIMENT CONTROL PLAN.	1 DAY
ROUGH GRADE AREAS FOR PROPOSED IMPROVEMENTS.	1 WEEK
STABILIZE ALL CRITICAL AREAS SUBJECT TO EROSION.	ONGOING
CONSTRUCT BUILDING, CURBING, WALKS AND PAVEMENT SUBBASE	8 MONTHS
CONSTRUCT DRYWELL AND THE ROOF LEADER TO SYSTEM	3 DAYS
FINE GRADE, PLACE TOPSOIL, INSTALL LANDSCAPE PLANTINGS, SEED, AND MULCH IN ACCORDANCE WITH PERMANENT SEEDING AND MULCHING STANDARDS.	1 WEEK
AFTER LANDSCAPE STABILIZATION, REMOVE ALL SILT FENCING.	1 DAY
FINAL PAVE AND STRIPE PARKING AND DRIVEWAY AREAS.	1 DAY
TOTAL DURATION	± 10 MONTHS

ALL ROADS AND WALKWAYS SHALL BE SWEEPED DAILY, OR AS REQUIRED, THROUGHOUT THE DURATION OF CONSTRUCTION.

STANDARD FOR PERMANENT VEGETATIVE COVER

- SITE PREPARATION:**
 - GRADE AS NEEDED AND FEASIBLE TO PERMIT THE USE OF CONVENTIONAL EQUIPMENT FOR SEEDED PREPARATION, SEEDING, MULCH APPLICATION, AND MULCH ANCHORING. ALL GRADING SHOULD BE DONE IN ACCORDANCE WITH STANDARD FOR LAND GRADING.
 - IMMEDIATELY PRIOR TO SEEDING AND TOPSOIL APPLICATION, THE SUBSOIL SHALL BE EVALUATED FOR COMPACTION IN ACCORDANCE WITH THE STANDARD FOR LAND GRADING.
 - TOPSOIL SHOULD BE HANDLED ONLY WHEN IT IS DRY ENOUGH TO WORK WITHOUT DAMAGING THE SOIL STRUCTURE. A UNIFORM APPLICATION TO A DEPTH OF 5 INCHES (UNSETTLED) IS REQUIRED ON ALL SITES. TOPSOIL SHALL BE AMENDED WITH ORGANIC MATTER, AS NEEDED, IN ACCORDANCE WITH THE STANDARD FOR TOPSOILING.
 - INSTALL NEEDED EROSION CONTROL PRACTICES OR FACILITIES SUCH AS DIVERSIONS, GRADE STABILIZATION STRUCTURES, CHANNEL STABILIZATION MEASURES, SEDIMENT BASINS, AND WATERWAYS.
- SEEDED PREPARATION:**
 - UNFORMALLY APPLY GROUND LIMESTONE AND FERTILIZER TO TOPSOIL, WHICH HAS BEEN SPREAD AND FIRMED, ACCORDING TO SOIL TEST RECOMMENDATIONS SUCH AS OFFERED BY RUTGERS CO-OPERATIVE EXTENSION. SOIL SAMPLE MAULERS ARE AVAILABLE FROM THE LOCAL RUTGERS CO-OPERATIVE EXTENSION OFFICES (HTTP://JAMES.RUTGERS.EDU/COUNTY). FERTILIZER SHALL BE APPLIED AT THE RATE OF 50 POUNDS PER ACRE OR 11 POUNDS PER 1,000 SQUARE FEET OF 10-10-10 OR EQUIVALENT WITH 50% WATER INSOLUBLE NITROGEN UNLESS A SOIL TEST INDICATES OTHERWISE AND INCORPORATED INTO THE SUBGRADE 4 INCHES. IF FERTILIZER IS NOT INCORPORATED, APPLY ONE-HALF THE RATE DESCRIBED ABOVE DURING SEEDED PREPARATION AND REPEAT ANOTHER ONE-HALF RATE APPLICATION OF THE SAME FERTILIZER WITHIN 3 TO 5 WEEKS AFTER SEEDING.
 - WORK LIME AND FERTILIZER INTO THE TOPSOIL AS NEARLY AS PRACTICAL, TO A DEPTH OF 4 INCHES WITH A DISC, SPRING-TOOTH HARROW, OR OTHER SUITABLE EQUIPMENT. THE FINAL HARROWING OR DISKING OPERATION SHOULD BE ON THE GENERAL CONTOUR. CONTINUE TILLAGE UNTIL A REASONABLE UNIFORM SEEDED IS PREPARED.
 - HIGH ACID PRODUCING SOILS (SOILS HAVING A pH OF 4 OR LESS OR CONTAINING IRON SULFIDE SHALL BE COVERED WITH A MINIMUM OF 12 INCHES OF SOIL HAVING A pH OF 5 OR MORE BEFORE INITIATING SEEDED REPARATION. SEE STANDARD FOR MANAGEMENT OF HIGH-ACID-PRODUCING SOILS FOR SPECIFIC REQUIREMENTS.
- SEEDING:**

PERMANENT SEEDING SHALL CONSIST OF THE FOLLOWING MIXTURE OR APPROVED EQUAL.

SITE CONTAINS SOIL: F&B FREEHOLD SANDY LOAM, 2 TO 5 PERCENT SLOPES AND CLASSIFIED AS "WELL DRAINED" AS PER NJ WEB SOIL SURVEY USDA

PLANTING MIXTURE TO BE USED: MIX-10 (RESIDENTIAL/COMMERCIAL USE)

TALL FESCUE (TURF-TYPE) @ 26% LB/AC
PERENNIAL RYEGRASS @ 20% LB/AC
OR WHITE CLOVER @ 5% LB/AC (WHITE CLOVER CAN BE EXCLUDED ON LAWN SITES)

SITE IS LOCATED WITHIN USDA PLANT HARDINESS ZONE 6B. PLANTING DATES:
OPTIMAL DATE: 3/01 TO 4/30
ACCEPTABLE DATE: 5/01 TO 8/14 (**)
ACCEPTABLE DATE: 8/15 TO 10/15 (**)

(**) SUMMER SEEDINGS SHOULD ONLY BE CONDUCTED WHEN THE SITE IS IRRIGATED. MIXES INCLUDING WHITE CLOVER REQUIRE THAT AT LEAST SIX WEEKS OF GROWING SEASON REMAIN AFTER SEEDING TO ENSURE ESTABLISHMENT BEFORE FREEZING CONDITIONS.

 - STRAW OR HAY, UNROTTED SMALL GRAIN STRAW, HAY FREE OF SEEDS, TO BE APPLIED AT THE RATE OF 1-1/2 TO 2 TONS PER ACRE (90 TO 100 POUNDS PER 1,000 SQUARE FEET), EXCEPT THAT WHERE A COMPOST IS USED INSTEAD OF A LIQUID MULCH-BINDER (TACKIFYING OR ADHESIVE AGENT), THE RATE OF APPLICATION IS 3 TONS PER ACRE. MULCH CHOPPER-BLOWERS MUST NOT GRIND THE MULCH. HAY MULCH IS NOT RECOMMENDED FOR ESTABLISHING FINE TURF OR LAWNS DUE TO THE PRESENCE OF WEED SEED.
 - LIQUID MULCH-BINDERS: MAY BE USED TO ANCHOR SALT HAY, HAY OR STRAW MULCH.
 - APPLICATIONS SHOULD BE HEAVIER AT EDGES WHERE WIND MAY CATCH THE MULCH, IN VALLEYS, AND AT CRESTS OF BANKS. THE REMAINDER OF THE AREA SHOULD BE UNIFORM IN APPEARANCE.
 - USE ONE OF THE FOLLOWING:
 - ORGANIC AND VEGETABLE BASED BINDERS: NATURALLY OCCURRING, POWDER-BASED, HYDROPHILIC MATERIALS WHEN MIXED WITH WATER FORMULATES A GEL AND WHEN APPLIED TO MULCH UNDER SATISFACTORY CURING CONDITIONS WILL FORM MEMBRANED NETWORKS OF INSOLUBLE POLYMERS. THE VEGETABLE GEL SHALL BE PHYSIOLOGICALLY HARMLESS AND NOT RESULT IN A PHYTOXIC EFFECT OR IMPEDS GROWTH OF TURF GRASS. USE AT RATES AND WEATHER CONDITIONS AS RECOMMENDED BY THE MANUFACTURER TO ANCHOR MULCH MATERIALS. MANY NEW PRODUCTS ARE AVAILABLE, SOME OF WHICH MAY NEED FURTHER EVALUATION FOR USE IN THIS STATE.
 - SYNTHETIC BINDERS: HIGH POLYMER SYNTHETIC EMULSION, MISCIBLE WITH WATER WHEN DILUTED AND, FOLLOWING APPLICATION OF MULCH, DRYING AND CURING, SHALL NO LONGER BE SOLUBLE OR DISPERSIBLE IN WATER. BINDER SHALL BE APPLIED AT RATES RECOMMENDED BY THE MANUFACTURER AND REMAIN TACKY UNTIL GERMINATION OF GRASS.
NOTE: ALL NAMES GIVEN ABOVE ARE REGISTERED TRADE NAMES. THIS DOES NOT CONSTITUTE A RECOMMENDATION OF THESE PRODUCTS TO THE EXCLUSION OF OTHER PRODUCTS.
 - WOOD-FIBER OR PAPER-FIBER MULCH: SHALL BE MADE FROM WOOD, PLANT FIBERS OR PAPER CONTAINING NO GROWTH OR GERMINATION INHIBITING MATERIALS, USED AT THE RATE OF 1,500 POUNDS PER ACRE (OR AS RECOMMENDED BY THE PRODUCT MANUFACTURER) AND MAY BE APPLIED BY A HYDROSEEDER. MULCH SHALL NOT BE MIXED IN THE TANK WITH SEED. USE IS LIMITED TO FLATTER SLOPES AND DURING OPTIMUM SEEDING PERIODS IN SPRING AND FALL.
 - PELLETIZED MULCH-COMPRESSED AND EXTRUDED PAPER AND/OR WOOD FIBER PRODUCT, WHICH MAY CONTAIN CO-POLYMERS, TACKIFIERS, FERTILIZERS AND COLORING AGENTS. THE DRY PELLETS, WHEN APPLIED TO A SEEDBED AREA AND WATERED, FORM A MULCH MAT. PELLETIZED MULCH SHALL BE APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. MULCH MAY BE APPLIED BY HAND OR MECHANICAL SPREADER AT THE RATE OF 60-75 LB/1,000 SQUARE FEET AND ACTIVATED WITH 0.2 TO 0.4 INCHES OF WATER. THIS MATERIAL HAS BEEN FOUND TO BE BENEFICIAL FOR USE ON SMALL LAWN OR RENOVATION AREAS. SEEDBED AREAS WHERE WEED SEED FREE MULCH IS DESIRED, OR ON SITES WHERE STRAW MULCH AND TACKIFIER AGENT ARE NOT PRACTICAL OR DESIRABLE, APPLYING THE FULL 0.2 TO 0.4 INCHES OF WATER AFTER SPREADING PELLETIZED MULCH ON THE SEEDBED IS EXTREMELY IMPORTANT FOR SUFFICIENT ACTIVATION AND EXPANSION OF THE MULCH TO PROVIDE SOIL COVERAGE.
- IRRIGATION (WHERE FEASIBLE):**

IF SOIL MOISTURE IS DEFICIENT SUPPLY NEW SEEDING WITH ADEQUATE WATER (A MINIMUM OF 1/4 INCH) APPLIED UP TO TWICE A DAY UNTIL VEGETATION IS WELL ESTABLISHED. THIS IS ESPECIALLY TRUE WHEN SEEDINGS ARE MADE IN ABNORMALLY DRY OR HOT WEATHER OR ON DROUGHTY SITES.
- TOPOSSURING:**

SINCE SOIL ORGANIC MATTER CONTENT AND SLOW RELEASE NITROGEN FERTILIZER (WATER INSOLUBLE) ARE PRESCRIBED IN SECTION 2A-SEEDED PREPARATION IN THIS STANDARD, NO FOLLOWING UP OF TOPDRESSING IS MANDATORY. AN EXCEPTION MAYBE MADE WHERE GROSS NITROGEN DEFICIENCY EXISTS IN THE SOIL TO THE EXTENT THAT TURF FAILURE MAY DEVELOP. IN THAT INSTANCE, TOP DRESS WITH 10-10-10 OR EQUIVALENT AT 300 POUNDS PER ACRE OR 70 POUNDS PER 1,000 SQUARE FEET EVERY 3 TO 5 WEEKS UNTIL THE GROSS NITROGEN DEFICIENCY IN THE TURF IS ALLEVIATED.
- ESTABLISHING PERMANENT VEGETATIVE STABILIZATION:**

THE QUALITY OF PERMANENT VEGETATION RESULTS WITH THE CONTRACTOR, THE TIMING OF SEEDING, PREPARING THE SEEDED, APPLYING NUTRIENTS, MULCH AND OTHER MANAGEMENT ARE ESSENTIAL. THE SEED APPLICATION RATES IN TABLE 4-3 ARE REQUIRED WHEN A REPORT OF COMPLIANCE IS REQUESTED PRIOR TO ACTUAL ESTABLISHMENT OF PERMANENT VEGETATION. UP TO 50% REDUCTION IN APPLICATION RATES MAY BE USED WHEN PERMANENT VEGETATION IS ESTABLISHED PRIOR TO REQUESTING A REPORT OF COMPLIANCE FROM THE DISTRICT. THESE RATES APPLY TO ALL METHODS OF SEEDING. ESTABLISHING PERMANENT VEGETATION MEANS 80% VEGETATIVE COVER (OF THE SEEDED SPECIES) AND MOVING ONCE. NOTE THIS DESIGNATION OF MOVED ONCE DOES NOT GUARANTEE THE PERMANENCY OF THE TURF SHOULD OTHER MAINTENANCE FACTORS BE NEGLECTED OR OTHERWISE MISMANAGED.

DUST CONTROL NOTES

- THE FOLLOWING METHODS SHOULD BE CONSIDERED FOR CONTROLLING DUST:
- MULCHES - SEE STANDARD FOR STABILIZATION WITH MULCHES ONLY (PG. 5-1)
- VEGETATIVE COVER - SEE STANDARD FOR PERMANENT VEGETATIVE COVER (PG. 7-1), PERMANENT VEGETATIVE COVER FOR SOIL STABILIZATION (PG. 4-1), AND PERMANENT STABILIZATION WITH SOIL (PG. 6-1)
- SPRAY-ON ADHESIVES - ON MINERAL SOILS (NOT EFFECTIVE ON CLAY SOILS), KEEP TRAFFIC OFF THESE AREAS.
- | MATERIAL | WATER DILUTION | TYPE OF NOZZLE | APPLY GALLONS/ACRE |
|--------------------------------------|---|----------------|--------------------|
| ANIONIC ASPHALT EMULSION | 7:1 | COARSE SPRAY | 1200 |
| LATEX EMULSION | 12.5:1 | FINE SPRAY | 235 |
| RESIN IN WATER | 4:1 | FINE SPRAY | 300 |
| POLYACRYLAMIDE (PAM) - SPRAY ON USED | APPLY ACCORDING TO MANUFACTURER'S INSTRUCTIONS. MAY ALSO BE AS AN ADDITIVE TO SEDIMENT BASINS TO FLOCCULATE AND PRECIPITATE | | |
| POLYACRYLAMIDE (PAM) - DRY SPRAY | SUSPENDED COLLOIDS. SEE SEDIMENT BASIN STANDARD (PG. 26-1) | | |
| ADJULATED SOY BEAN SOAP STICK | NONE | COARSE SPRAY | 1200 |

- TRAILER - TO ROUGHEN SURFACE AND BRING CLOUDS TO THE SURFACE. THIS IS A TEMPORARY EMERGENCY MEASURE WHICH SHOULD BE USED BEFORE SOIL BLOWING STARTS. BEGIN BLOWING ON WINDWARD SIDE OF SITE.
- CHISEL - TYPE PLOWS SPACED ABOUT 12 INCHES APART, AND SPRING-TOOTHED HARROWS ARE EXAMPLES OF EQUIPMENT WHICH MAY PRODUCE THE DESIRED EFFECT.
- SPRINKLING - SITE IS SPRINKLED UNTIL THE SURFACE IS WET.
- BARRIERS - SOLID BOARD FENCES, SNOW FENCES, BURLAP FENCES, CRATE WALLS, BALES OF HAY, AND SIMILAR MATERIAL CAN BE USED TO CONTROL AIR CURRENTS AND SOIL BLOWING.
- CALCIUM CHLORIDE - SHALL BE IN THE FORM OF LOOSE, DRY GRANULATES OF FLAKES FINE ENOUGH TO FEED THROUGH COMMONLY USED SPREADERS AT A RATE THAT WILL KEEP SURFACE MOIST BUT NOT CAUSE POLLUTION OR PLANT DAMAGE. IF USED ON STEEPER SLOPES, THEN USE OTHER PRACTICES TO PREVENT WASHING INTO STREAMS.
- STONE - COVER SURFACE WITH CRUSHED STONE OR COARSE GRAVEL.

APPLICANT

44 - 46 WAINWRIGHT, LLC
429 CHESTNUT STREET
ROSELLE PARK, NJ 07024
PHONE: 908-275-1141

SITE INFORMATION

BLOCK 146, LOT 12
1526 - 1528 W 3RD STREET
PLAINFIELD, NEW JERSEY
LOT AREA = 4,500 S.F. (0.103 AC)
DISTURBANCE = 5,212 S.F. (0.120 AC)

SOIL EROSION AND SEDIMENT CONTROL NOTES

- REVISED 8/24/20
- ALL SOIL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE INSTALLED PRIOR TO ANY MAJOR SOIL DISTURBANCES, OR IN THEIR PROPER SEQUENCE AND MAINTAINED UNTIL PERMANENT PROTECTION IS ESTABLISHED.
 - ANY DISTURBED AREAS THAT WILL BE LEFT EXPOSED MORE THAN 30 DAYS AND NOT SUBJECT TO CONSTRUCTION TRAFFIC, WILL IMMEDIATELY BE COVERED WITH A TEMPORARY COVER. THE SEASON PREVENTS THE ESTABLISHMENT OF A TEMPORARY COVER. THE DISTURBED AREAS WILL BE MULCHED WITH STRAW, OR EQUIVALENT MATERIAL, AT A RATE OF TWO (2) TONS PER ACRE, ACCORDING TO NJ STATE STANDARDS.
 - PERMANENT VEGETATION SHALL BE SEEDING OR SOODED ON ALL EXPOSED AREAS WITHIN TEN (10) DAYS AFTER FINAL GRADING. MULCH WILL BE USED FOR PROTECTION UNTIL SEEDING IS ESTABLISHED.
 - ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE NJ STATE STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL, IN NEW JERSEY (7TH EDITION, LAST REVISED JULY 2017).
 - A SUB-BASE COURSE WILL BE APPLIED IMMEDIATELY FOLLOWING ROUGH GRADING AND INSTALLATION OF IMPROVEMENTS IN ORDER TO STABILIZE STREETS, ROADS, DRIVEWAYS AND PARKING AREAS. IN AREAS WHERE NO UTILITIES ARE PRESENT, THE SUB-BASE SHALL BE INSTALLED WITHIN 15 DAYS OF PRELIMINARY GRADING.
 - IMMEDIATELY FOLLOWING INITIAL DISTURBANCE OR ROUGH GRADING ALL CRITICAL AREAS SUBJECT TO EROSION (I.E. STEEP SLOPES, ROADWAY EMBANKMENTS) WILL RECEIVE A TEMPORARY SEEDING IN COMINATION WITH STRAW MULCH OR A SUITABLE EQUIVALENT, AT A RATE OF TWO (2) TONS PER ACRE, ACCORDING TO THE NJ STATE STANDARDS.
 - ANY STEEP SLOPES RECEIVING PIPELINE INSTALLATION WILL BE BACKFILLED AND STABILIZED DAILY, AS THE INSTALLATION PROCEEDS (I.E.: SLOPES GREATER THAN 3:1).
 - TRAFFIC CONTROL STANDARDS REQUIRE THE INSTALLATION OF A 50x20x4" PAD OF 1 1/2" OR 2" STONE, AT ALL CONSTRUCTION DRIVEWAYS, IMMEDIATELY AFTER INITIAL SITE DISTURBANCE.
 - THE SOMERSET-UNION SOIL CONSERVATION DISTRICT SHALL BE NOTIFIED IN WRITING 48 HOURS IN ADVANCE OF ANY LAND DISTURBING ACTIVITY.
 - AT THE TIME WHEN THE SITE PREPARATION FOR PERMANENT VEGETATIVE STABILIZATION IS GOING TO BE ACCOMPLISHED, ANY SOIL THAT WILL NOT PROVIDE A SUITABLE ENVIRONMENT TO SUPPORT ADEQUATE VEGETATIVE GROUND COVER, SHALL BE REMOVED OR TREATED IN SUCH A WAY THAT WILL PERMANENTLY ADJUST THE SOIL CONDITIONS AND RENDER IT SUITABLE FOR VEGETATIVE GROUND COVER. THE REMOVAL OR TREATMENT OF THE SOIL WILL NOT PROVIDE SUITABLE CONDITIONS. NON-VEGETATIVE MEANS OF PERMANENT GROUND STABILIZATION WILL HAVE TO BE EMPLOYED. TOPSOIL SHOULD BE HANDLED ONLY WHEN IT IS DRY ENOUGH TO WORK WITHOUT DAMAGING THE SOIL STRUCTURE. A UNIFORM APPLICATION TO A DEPTH OF 5 INCHES (UNSETTLED) IS REQUIRED ON ALL SITES.
 - IN THAT NJSA 4:24-39 ET SEQ., REQUIRES THAT NO CERTIFICATE OF OCCUPANCY BE ISSUED BEFORE THE PROVISIONS OF THE CERTIFIED PLAN FOR SOIL EROSION AND SEDIMENT CONTROL HAVE BEEN COMPLIED WITH FOR PERMANENT MEASURES. ALL SITE WORK FOR CERTIFIED PLANS AND ALL WORK AROUND INDIVIDUAL LOTS IN SUBDIVISIONS, WILL HAVE TO BE COMPLETED PRIOR TO THE DISTRICT ISSUING A REPORT OF COMPLIANCE FOR THE ISSUANCE OF A CERTIFICATE OF OCCUPANCY BY THE MUNICIPALITY.
 - CONDUIT OUTLET PROTECTION MUST BE INSTALLED AT ALL REQUIRED OUTFALLS PRIOR TO THE DRAINAGE SYSTEM BECOMING OPERATIONAL.
 - ANY CHANGES TO THE CERTIFIED SOIL EROSION AND SEDIMENT CONTROL PLAN WILL REQUIRE THE SUBMISSION OF REVISED SOIL EROSION AND SEDIMENT CONTROL PLANS TO THE DISTRICT FOR RECONSIDERATION. THE REVISED PLANS MUST MEET ALL CURRENT NJ STATE SOIL EROSION & SEDIMENT CONTROL STANDARDS.
 - THE SOMERSET-UNION SOIL CONSERVATION DISTRICT SHALL BE NOTIFIED OF ANY CHANGES IN OWNERSHIP.
 - MULCHING TO THE NJ STANDARDS IS REQUIRED FOR OBTAINING A CONDITIONAL REPORT OF COMPLIANCE. CONDITIONALS ARE ONLY ISSUED WHEN THE SEASON PROHIBITS SEEDING.
 - CONTRACTOR IS RESPONSIBLE FOR KEEPING ALL ADJACENT ROADS CLEAN DURING LIFE OF CONSTRUCTION PROJECT.
 - THE DEVELOPER SHALL BE RESPONSIBLE FOR REMEDIATING ANY EROSION OR SEDIMENT PROBLEMS THAT ARISE AS A RESULT OF ONGOING CONSTRUCTION AT THE REQUEST OF THE SOMERSET-UNION SOIL CONSERVATION DISTRICT.
 - HYDRO SEEDING IS A TWO-STEP PROCESS. THE FIRST STEP INCLUDES SEED, FERTILIZER, LIME, ETC., ALONG WITH MINIMAL AMOUNTS OF MULCH TO PROMOTE CONSISTENCY. GOOD SEED TO SOIL CONTACT, AND GIVE A VISUAL INDICATION OF COVERAGE. UPON COMPLETION OF SEEDING OPERATION, HYDRO-MULCH SHOULD BE APPLIED AT THE RATE OF 1500 LBS. PER ACRE IN SECOND STEP. THE USE OF HYDRO-MULCH, AS OPPOSED TO STRAW, IS LIMITED TO OPTIMUM SEEDING DATES AS LISTED IN THE NJ STANDARDS.

STANDARD FOR TEMPORARY VEGETATIVE COVER

- TEMPORARY VEGETATIVE COVER FOR SOIL STABILIZATION
- SITE PREPARATION:**
 - GRADE AS NEEDED AND FEASIBLE TO PERMIT THE USE OF CONVENTIONAL EQUIPMENT FOR SEEDED PREPARATION, SEEDING, MULCH APPLICATION, AND MULCH ANCHORING. ALL GRADING SHOULD BE DONE IN ACCORDANCE WITH STANDARDS FOR LAND GRADING, PG. 19-1.
 - INSTALL NEEDED EROSION CONTROL PRACTICES OR FACILITIES SUCH AS DIVERSIONS, GRADE STABILIZATION STRUCTURES, CHANNEL STABILIZATION MEASURES, SEDIMENT BASINS, AND WATERWAYS. SEE STANDARDS 11 THROUGH 42.
 - IMMEDIATELY PRIOR TO SEEDING, THE SURFACE SHOULD BE SOAKED BY "1" WHERE THERE HAS BEEN SOIL COMPACTION. THIS PRACTICE IS PERMISSIBLE ONLY WHERE THERE IS NO DANGER TO UNDERGROUND UTILITIES (CABLES, IRRIGATION SYSTEMS, ETC.).
 - SEEDED PREPARATION:**
 - APPLY GROUND LIMESTONE AND FERTILIZER ACCORDING TO SOIL TEST RECOMMENDATIONS SUCH AS OFFERED BY RUTGERS CO-OPERATIVE EXTENSION. SOIL SAMPLE MAULERS ARE AVAILABLE FROM THE LOCAL RUTGERS CO-OPERATIVE EXTENSION OFFICES. FERTILIZER SHALL BE APPLIED AT THE RATE OF 500 POUNDS PER ACRE OR 11 POUNDS PER 1,000 SQUARE FEET OF 10-10-10 OR EQUIVALENT WITH 50% WATER INSOLUBLE NITROGEN UNLESS A SOIL TEST INDICATES OTHERWISE. LIMEING RATES SHALL BE ESTABLISHED VIA SOIL TESTING. CALCIUM CARBONATE IS THE EQUIVALENT AND STANDARD FOR MEASURING THE ABILITY OF LIMING MATERIALS TO NEUTRALIZE SOIL ACIDITY AND SUPPLY CALCIUM AND MAGNESIUM TO GRASSES AND LEGUMES.
 - WORK LIME AND FERTILIZER INTO THE SOIL AS NEARLY AS PRACTICAL, TO A DEPTH OF 4 INCHES WITH A DISC, SPRINGTOOTH HARROW, OR OTHER SUITABLE EQUIPMENT. THE FINAL HARROWING OR DISKING OPERATION SHOULD BE ON THE GENERAL CONTOUR. CONTINUE TILLAGE UNTIL A REASONABLE UNIFORM SEEDED IS PREPARED.
 - INSPECT SEEDED JUST BEFORE SEEDING. IF TRAFFIC HAS LEFT THE SOIL COMPACTED, THE AREA MUST BE RETILLED IN ACCORDANCE WITH THE ABOVE.
 - SOILS HIGH IN SULFIDES OR HAVING A pH OF 4 OR LESS REFER TO STANDARD FOR MANAGEMENT OF HIGH-ACID PRODUCING SOILS.
 - SEEDING:**

TEMPORARY SEEDING SHALL CONSIST OF SPRING OATS APPLIED AT A RATE OF 2.0 LBS. PER 1,000 SF OR PERENNIAL RYEGRASS APPLIED AT A RATE OF 1.0 LBS. PER 1,000 SF. TEMPORARY SEEDING TO BE MAINTAINED UNTIL DISTURBED AREAS ARE PERMANENTLY STABILIZED WITH PERMANENT SEEDING.

OPTIMAL DATE: 3/01 TO 4/30
ACCEPTABLE DATE: 5/01 TO 8/14
ACCEPTABLE DATE: 8/15 TO 10/15
 - MULCHING:**

MULCHING IS REQUIRED ON ALL SEEDING. MULCH WILL INSURE AGAINST EROSION BEFORE GRASS IS ESTABLISHED AND WILL PROMOTE FASTER AND EARLIER ESTABLISHMENT. THE EXISTENCE OF VEGETATION SUFFICIENT TO CONTROL SOIL EROSION SHALL BE DEEMED COMPLIANCE WITH THIS MULCHING REQUIREMENT.

 - STRAW OR HAY, UNROTTED SMALL GRAIN STRAW, HAY FREE OF SEEDS, APPLIED AT THE RATE OF 1-1/2 TO 2 TONS PER ACRE (90 TO 100 POUNDS PER 1,000 SQUARE FEET), EXCEPT THAT WHERE A COMPOST IS USED INSTEAD OF A LIQUID MULCH-BINDER (TACKIFYING OR ADHESIVE AGENT), THE RATE OF APPLICATION IS 3 TONS PER ACRE. MULCH CHOPPER-BLOWERS MUST NOT GRIND THE MULCH. HAY MULCH IS NOT RECOMMENDED FOR ESTABLISHING FINE TURF OR LAWNS DUE TO THE PRESENCE OF WEED SEED.
 - APPLICATION: SPREAD MULCH UNIFORMLY BY HAND OR MECHANICALLY SO THAT APPROXIMATELY 95% OF THE SOIL SURFACE WILL BE COVERED. FOR UNIFORM DISTRIBUTION OF HAND-SPREAD MULCH, DIVIDE AREA INTO APPROXIMATELY 1,000 SQUARE FEET SECTIONS AND DISTRIBUTE TO 90 POUNDS WITHIN EACH SECTION.
 - ANCHORING SHALL BE ACCOMPLISHED IMMEDIATELY AFTER PLACEMENT TO MINIMIZE LOSS BY WIND OR WATER. THIS MAY BE DONE BY ONE OF THE FOLLOWING METHODS, DEPENDING UPON THE SIZE OF THE AREA, STEEPNESS OF SLOPES, AND COSTS.
 - ORGANIC AND VEGETABLE BASED BINDERS: NATURALLY OCCURRING, POWDER BASED, HYDROPHILIC MATERIALS WHEN MIXED WITH WATER FORMULATES A GEL AND WHEN APPLIED TO MULCH UNDER SATISFACTORY CURING CONDITIONS WILL FORM MEMBRANED NETWORKS OF INSOLUBLE POLYMERS. THE VEGETABLE GEL SHALL BE PHYSIOLOGICALLY HARMLESS AND NOT RESULT IN A PHYTOXIC EFFECT OR IMPEDS GROWTH OF TURF GRASS. USE AT RATES AND WEATHER CONDITIONS AS RECOMMENDED BY THE MANUFACTURER TO ANCHOR MULCH MATERIALS. MANY NEW PRODUCTS ARE AVAILABLE, SOME OF WHICH MAY NEED FURTHER EVALUATION FOR USE IN THIS STATE.
 - SYNTHETIC BINDERS: HIGH POLYMER SYNTHETIC EMULSION, MISCIBLE WITH WATER WHEN DILUTED AND, FOLLOWING APPLICATION OF MULCH, DRYING AND CURING, SHALL NO LONGER BE SOLUBLE OR DISPERSIBLE IN WATER. IT SHALL BE APPLIED AT RATES RECOMMENDED BY THE MANUFACTURER AND REMAIN TACKY UNTIL GERMINATION OF GRASS.
 - WOOD-FIBER OR PAPER-FIBER MULCH SHALL BE MADE FROM WOOD, PLANT FIBERS OR PAPER CONTAINING NO GROWTH OR GERMINATION INHIBITING MATERIALS AND USED AT THE RATE OF 1,500 POUNDS PER ACRE OR AS RECOMMENDED BY THE PRODUCT MANUFACTURER AND MAY BE APPLIED BY A HYDROSEEDER. THIS MULCH SHALL NOT BE MIXED IN THE TANK WITH SEED. USE IS LIMITED TO FLATTER SLOPES AND DURING OPTIMUM SEEDING PERIODS IN SPRING AND FALL.
 - PELLETIZED MULCH-COMPRESSED AND EXTRUDED PAPER AND/OR WOOD FIBER PRODUCT, WHICH MAY CONTAIN CO-POLYMERS, TACKIFIERS, FERTILIZERS AND COLORING AGENTS. THE DRY PELLETS, WHEN APPLIED TO A SEEDBED AREA AND WATERED, FORM A MULCH MAT. PELLETIZED MULCH SHALL BE APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. MULCH MAY BE APPLIED BY HAND OR MECHANICAL SPREADER AT THE RATE OF 60-75 LB/1,000 SQUARE FEET AND ACTIVATED WITH 0.2 TO 0.4 INCHES OF WATER. THIS MATERIAL HAS BEEN FOUND TO BE BENEFICIAL FOR USE ON SMALL LAWN OR RENOVATION AREAS. SEEDBED AREAS WHERE WEED-SEED FREE MULCH IS DESIRED OR ON SITES WHERE STRAW MULCH AND TACKIFIER AGENT ARE NOT PRACTICAL OR DESIRABLE, APPLYING THE FULL 0.2 TO 0.4 INCHES OF WATER AFTER SPREADING PELLETIZED MULCH ON THE SEED BED IS EXTREMELY IMPORTANT FOR SUFFICIENT ACTIVATION AND EXPANSION OF THE MULCH TO PROVIDE SOIL COVERAGE.

SOIL COMPACTION EXEMPTION NOTE
AS DETERMINED BY THE STATE POLICY MAP, THE PROJECT AREA FALLS WITHIN THE METROPOLITAN PLANNING AREA (PA1) UNDER EXISTING CONDITIONS. THE SITE IS NOT COVERED IN WOODY VEGETATION NOR REGROWTH. IN ACCORDANCE WITH THE NEW JERSEY STANDARD FOR LAND GRADING (REVISED 2017), NON-WOODY VEGETATED PA1 AREAS FALL UNDER THE SOIL COMPACTION EXEMPTION LIST AS AN "URBAN REDEVELOPMENT" AND IS DEFINED BY NJDEP AS "PREVIOUSLY DISTURBED".

VERTICAL DATUM, AS SHOWN, BASED ON NAVD 88

revisions

01.	05.20.2022	revised per completeness letter
02.	07.19.2022	general revisions
03.	08.12.2022	general revisions

manTERRA DESIGN LLC

THE STATE OF NEW JERSEY REQUIRES NOTIFICATION BY EDUCATORS, LEGISLATORS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN THE STATE.

44-46 WAINWRIGHT LLC

BLOCK 146, LOT 12
1526-1528 W 3RD STREET
CITY OF PLAINFIELD
UNION COUNTY, NEW JERSEY

SOIL EROSION & SEDIMENT CONTROL PLAN

Giovanni Maniulo


GIOVANNI MANIULO, PE
NEW JERSEY PROFESSIONAL ENGINEER #7552

manTERRA DESIGN LLC

drawn by	jam	date	02.01.2022
checked by	jam	scale	1" = 10'


po box 275
somerville, nj 08876
908.800.5500
manterraesign.com
certificate of authorization: 24GA28327100

3

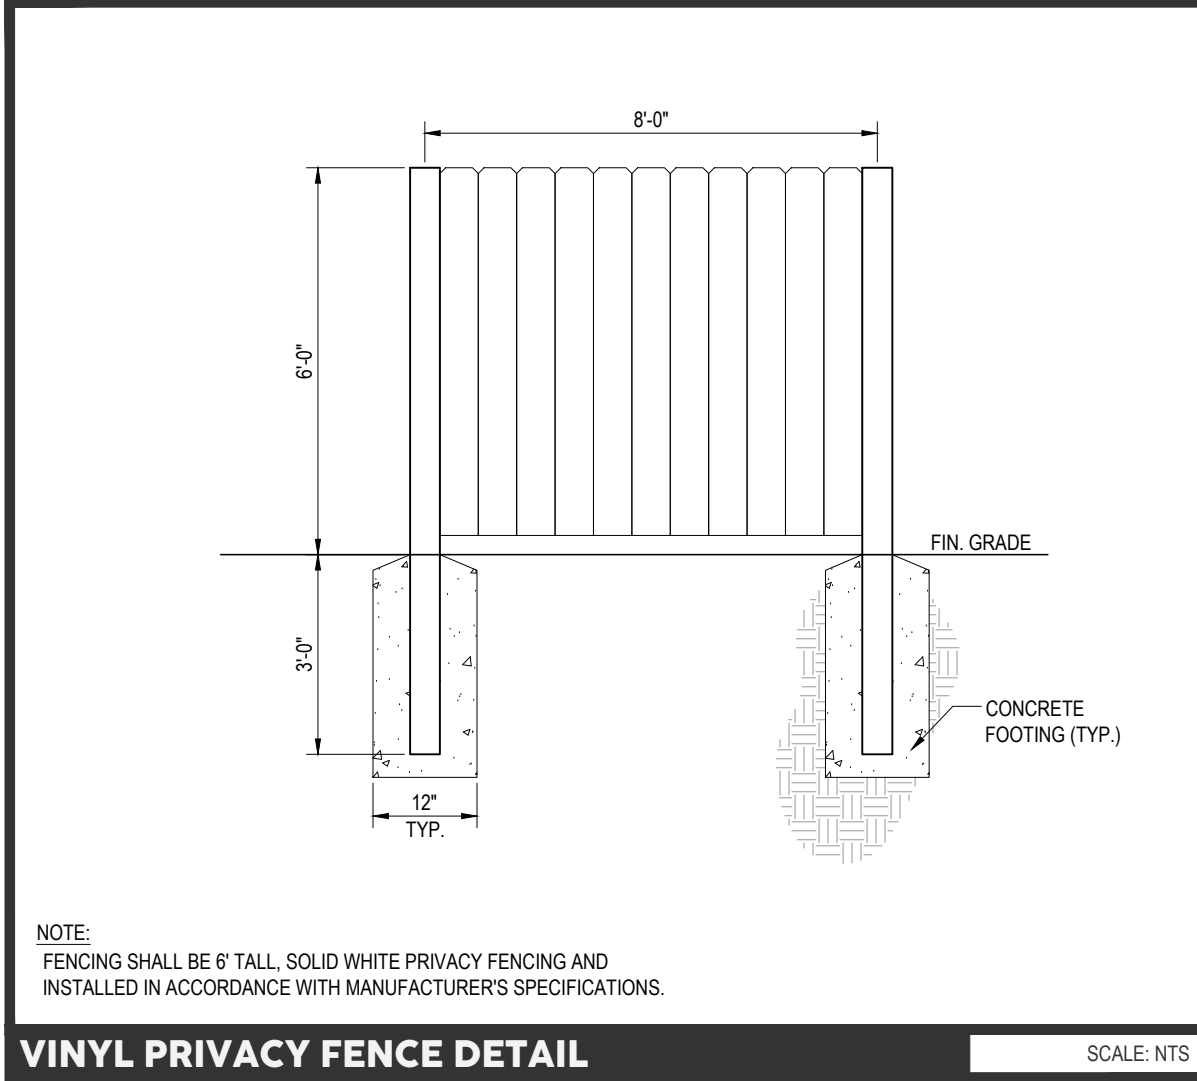


VINYL PRIVACY FENCE DETAIL

SCALE: NTS

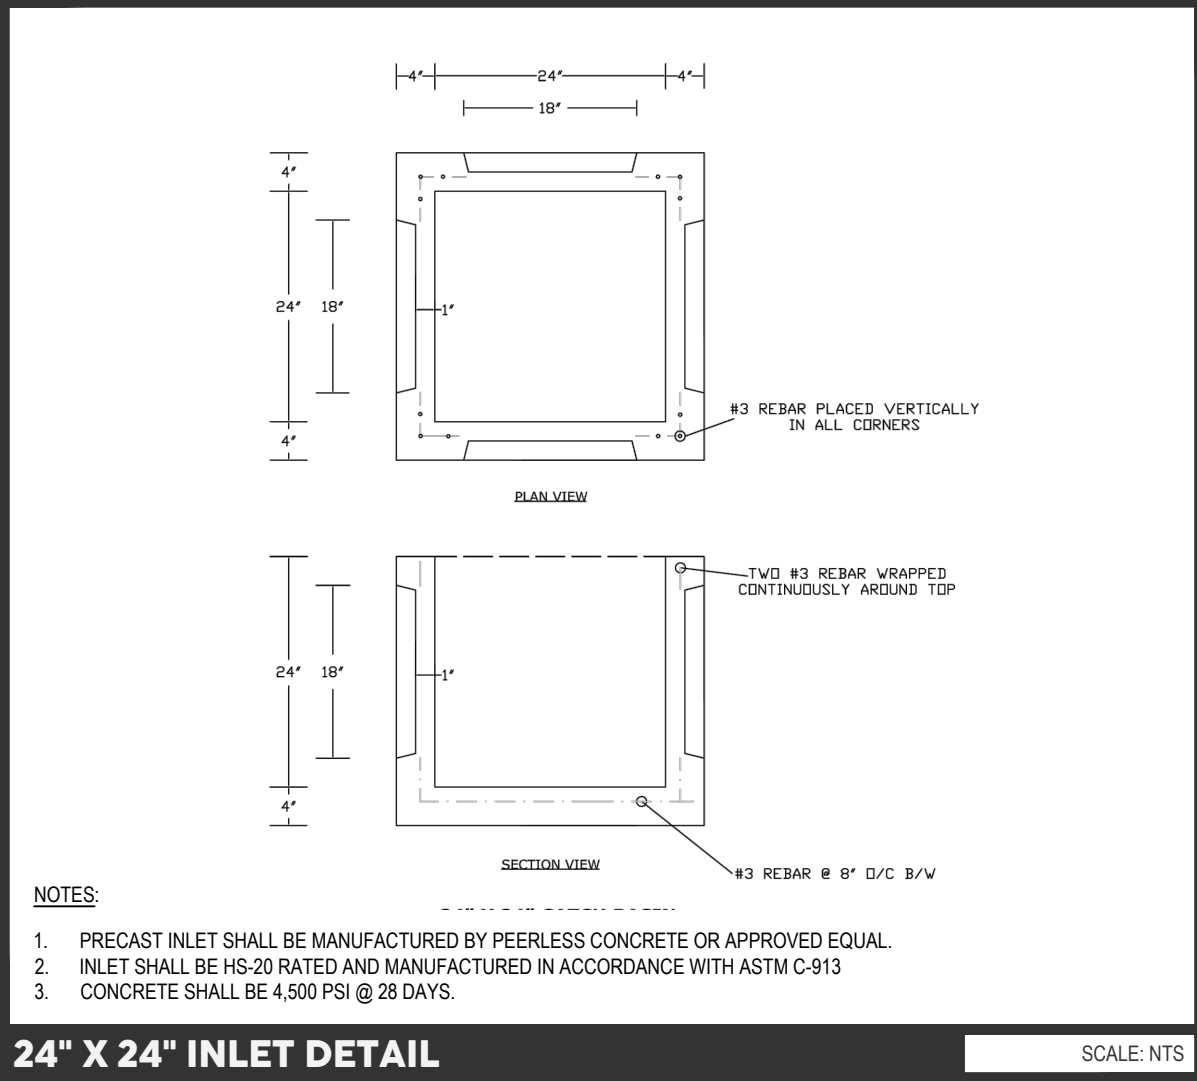


24" X 24" INLET DETAIL

SCALE: NTS

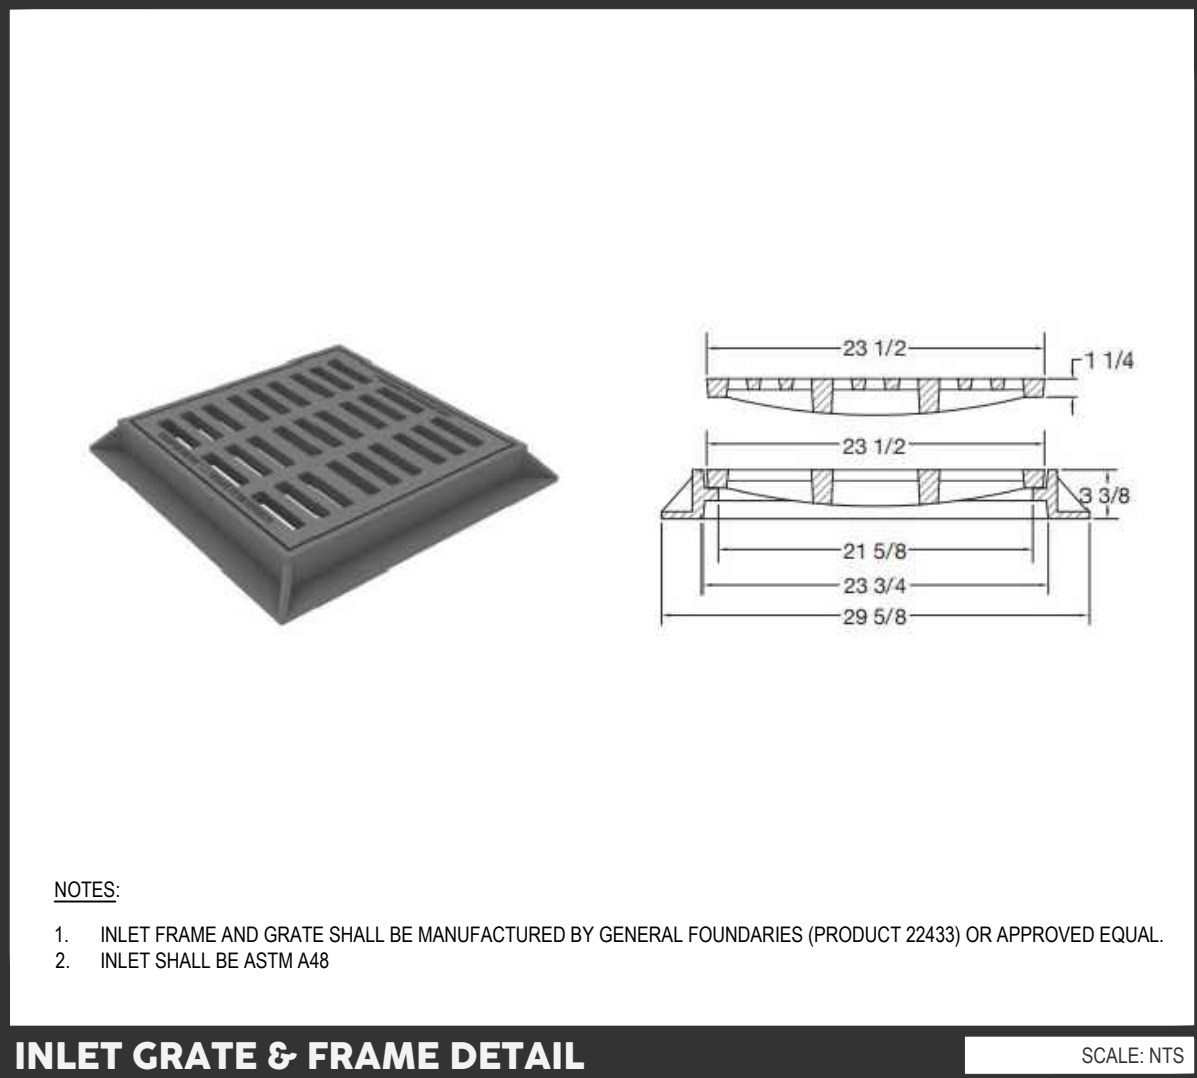

INLET GRATE & FRAME DETAIL

SCALE: NTS

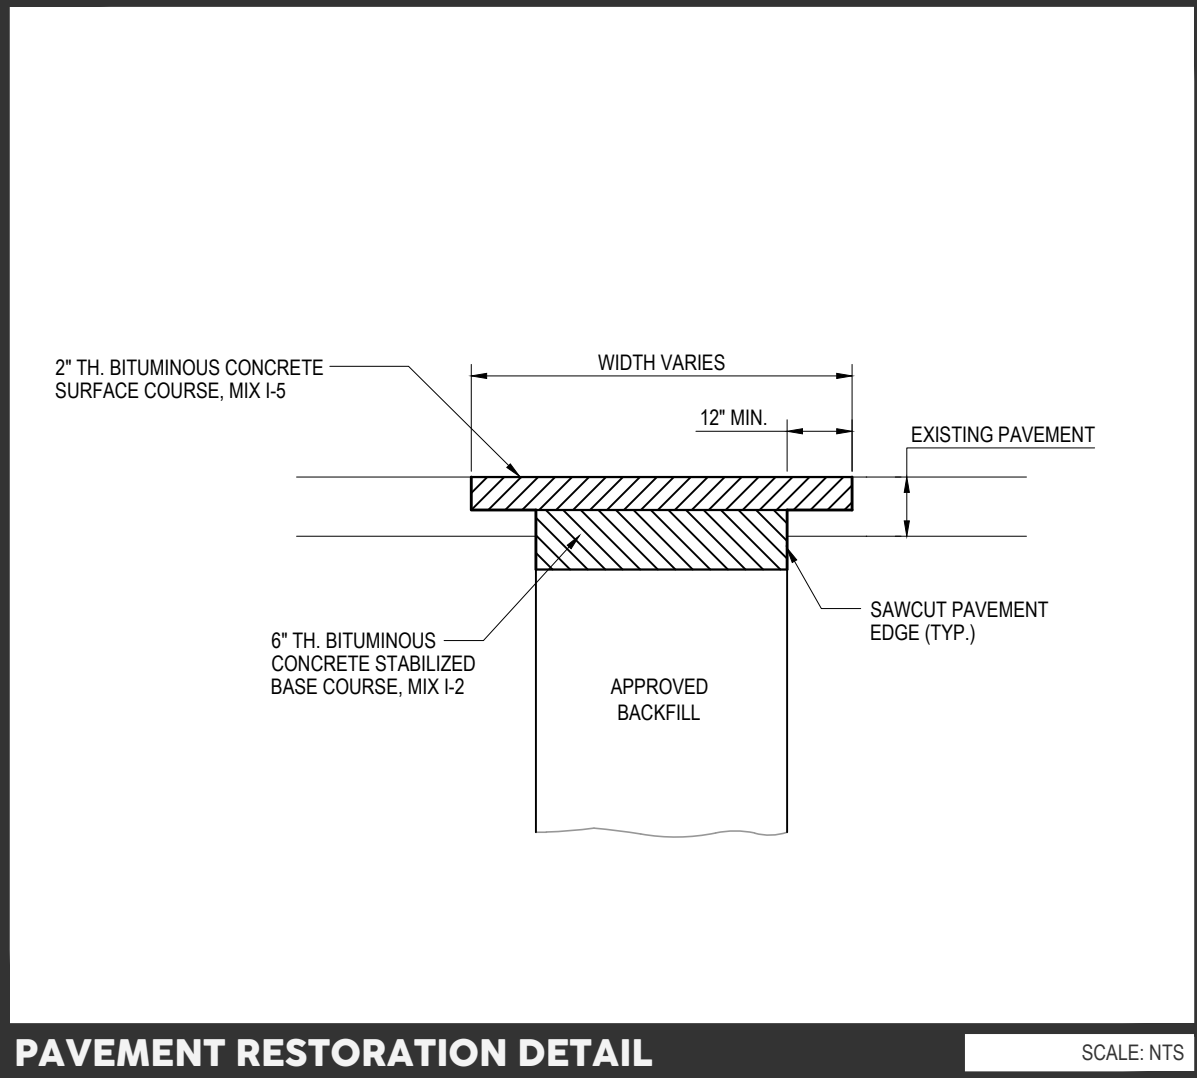


PAVEMENT RESTORATION DETAIL

SCALE: NTS



RECESSED LIGHT DETAIL

SCALE: NTS

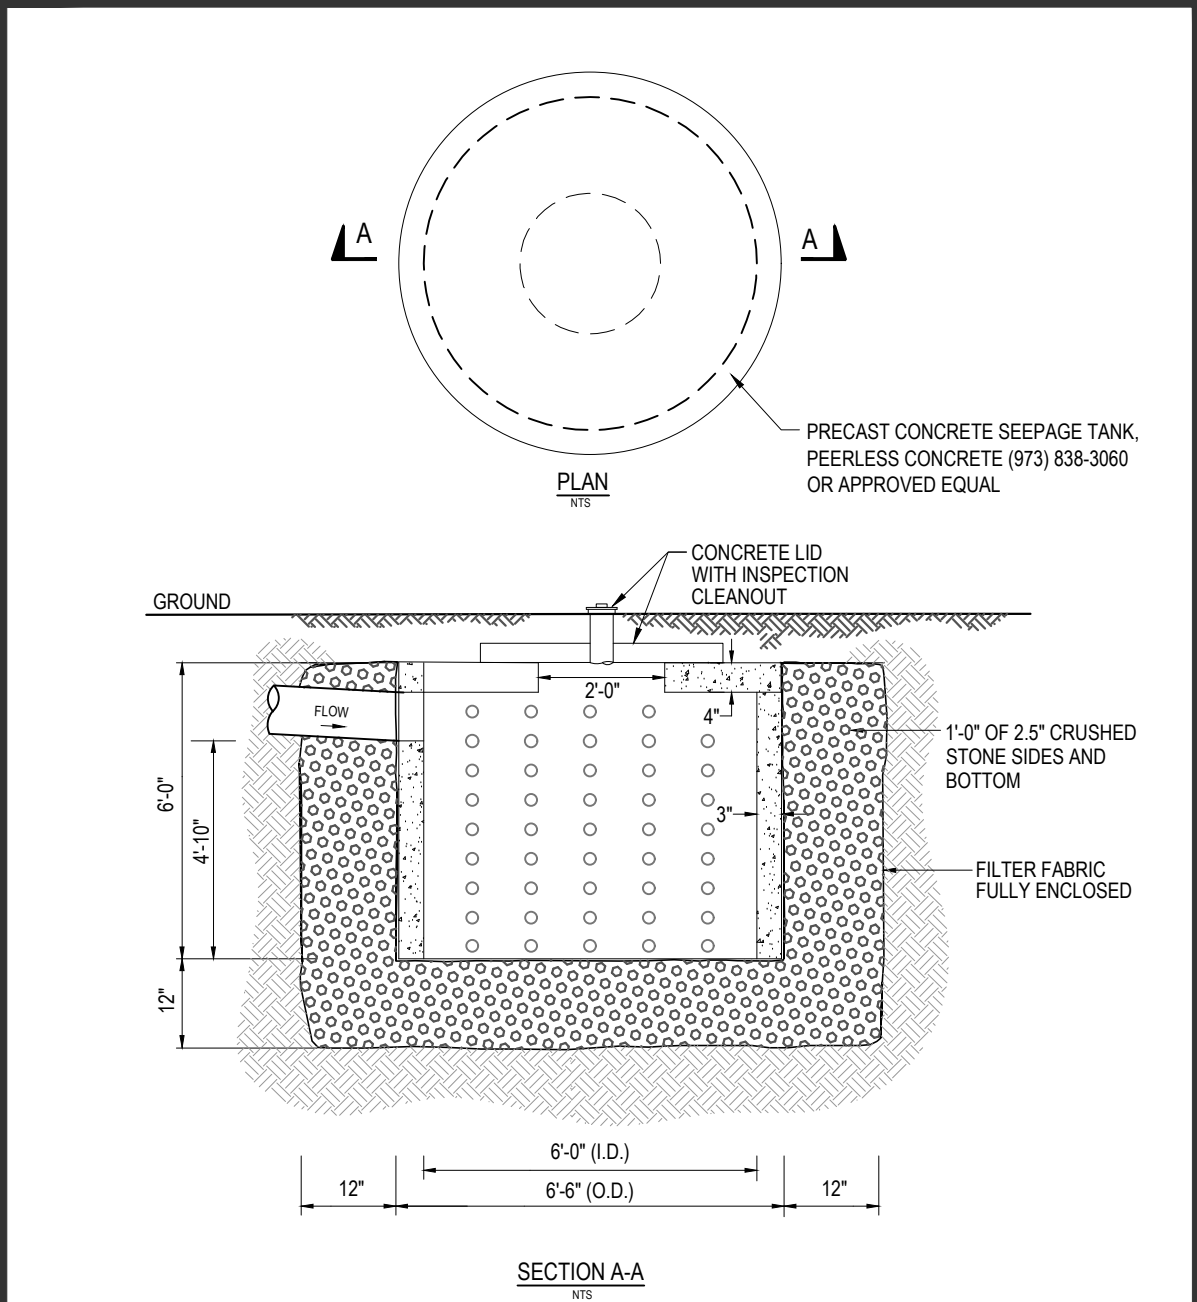


DRYWELL DETAIL

SCALE: NTS

NOTE:
THE DEVELOPER SHALL PROVIDE SOIL PERMEABILITY TESTS FOR EACH DRYWELL THAT DEMONSTRATES THAT THE DRYWELL WILL DRAIN WITHIN 72 HOURS AFTER A RAINFALL AND ALSO DETERMINE THE SEASONAL GROUNDWATER TABLE ELEVATION WITH A MINIMUM VERTICAL DISTANCE OF TWO (2) FEET FROM BASE OF DRYWELL SYSTEM TO SEASONAL HIGH GROUNDWATER. THESE TESTS SHALL BE CONDUCTED AND APPROVED PRIOR TO THE COMMENCEMENT OF THIS PROJECT.


DRYWELL DETAIL

SCALE: NTS

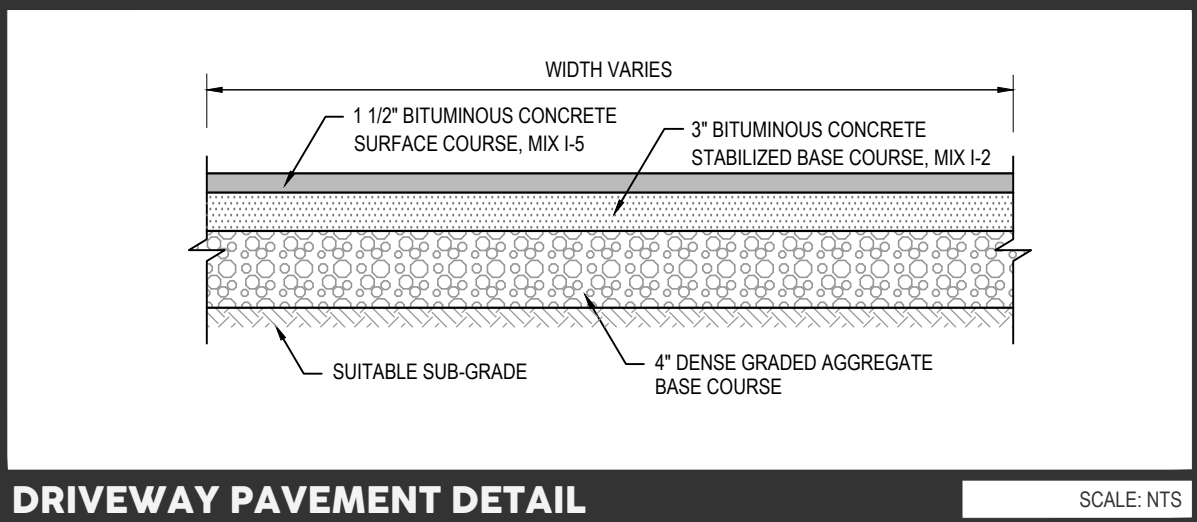


DRIVEWAY PAVEMENT DETAIL

SCALE: NTS

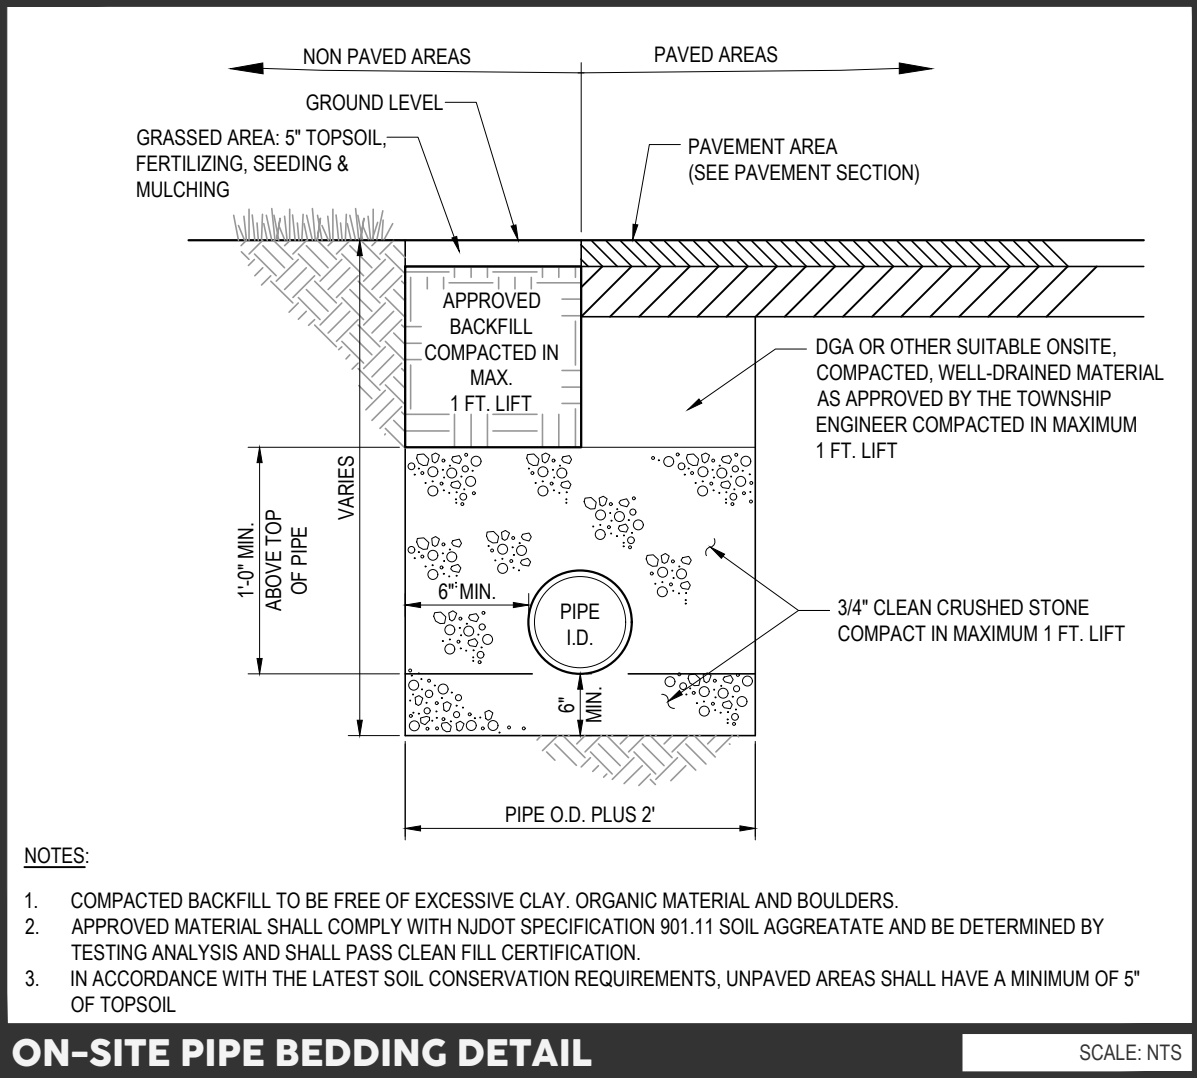


ON-SITE PIPE BEDDING DETAIL

SCALE: NTS

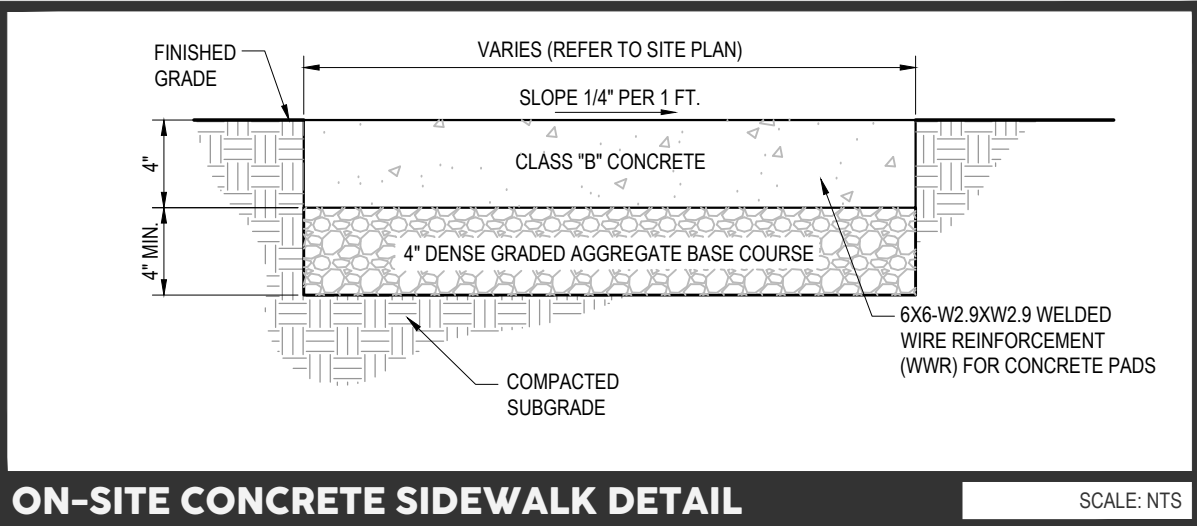


ON-SITE CONCRETE SIDEWALK DETAIL

SCALE: NTS

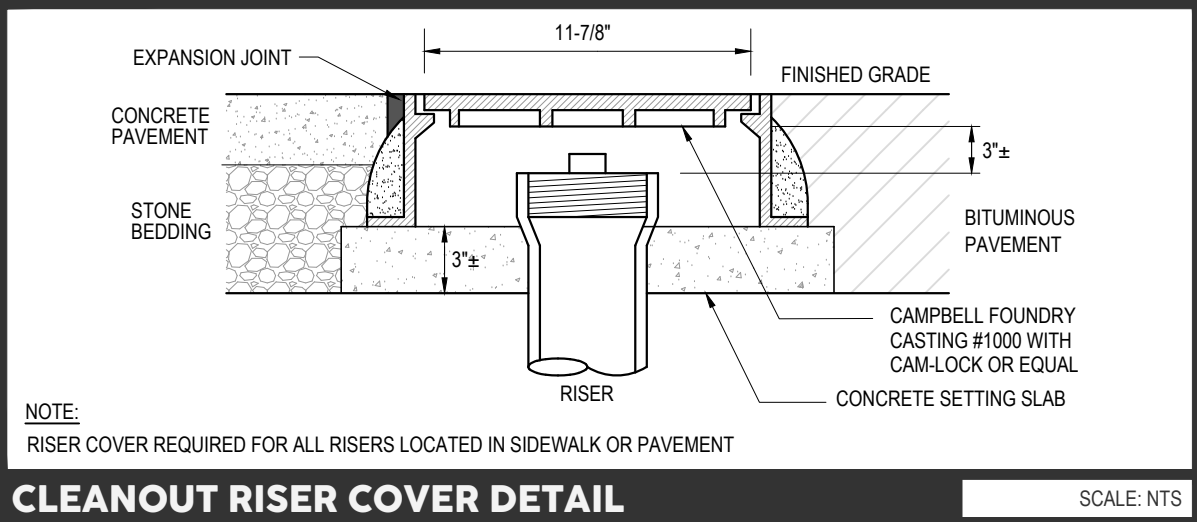


CLEANOUT RISER COVER DETAIL

SCALE: NTS

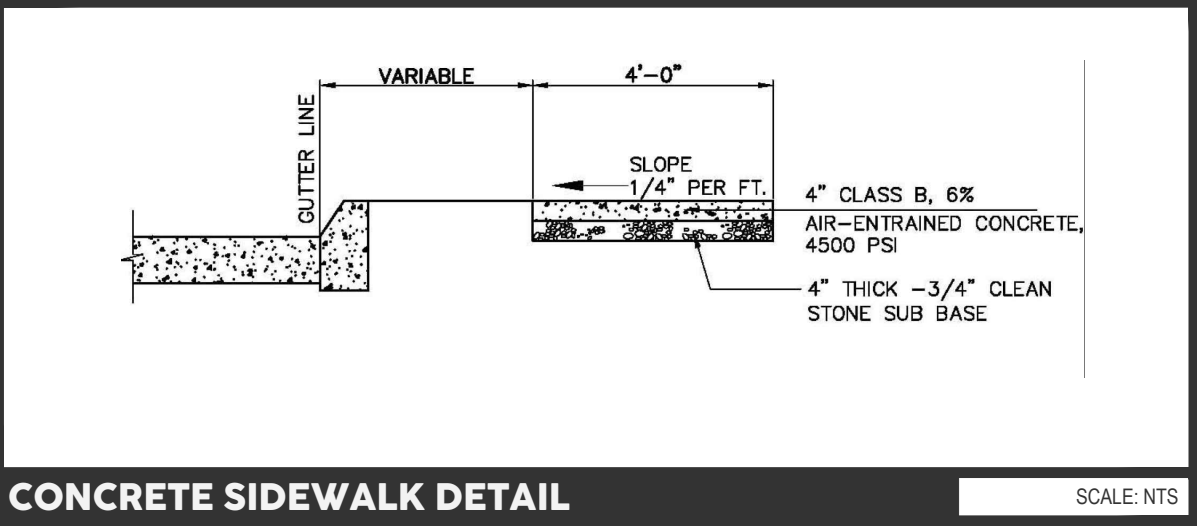


CONCRETE SIDEWALK DETAIL

SCALE: NTS

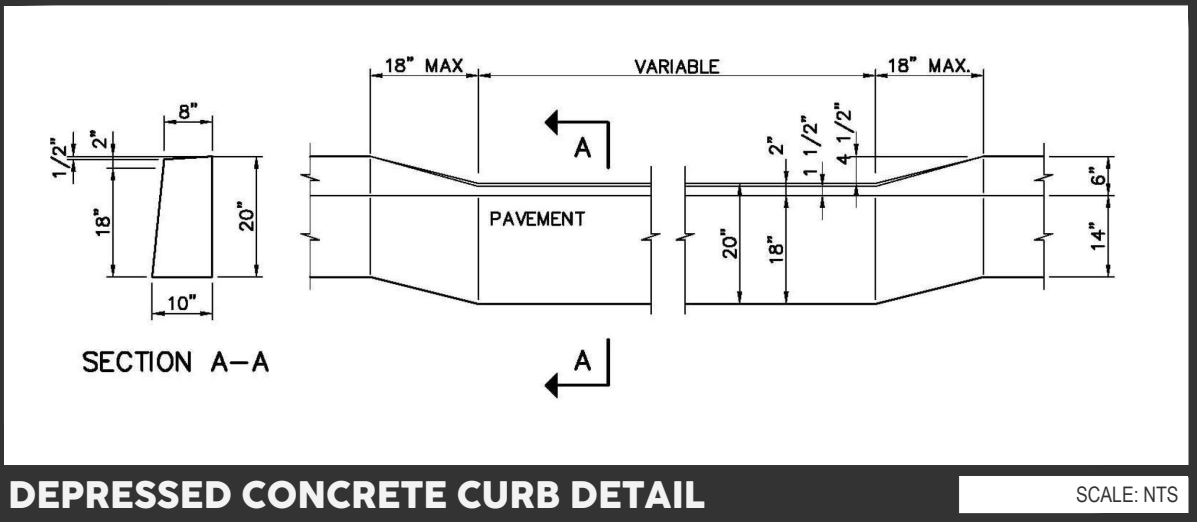


DEPRESSED CONCRETE CURB DETAIL

SCALE: NTS

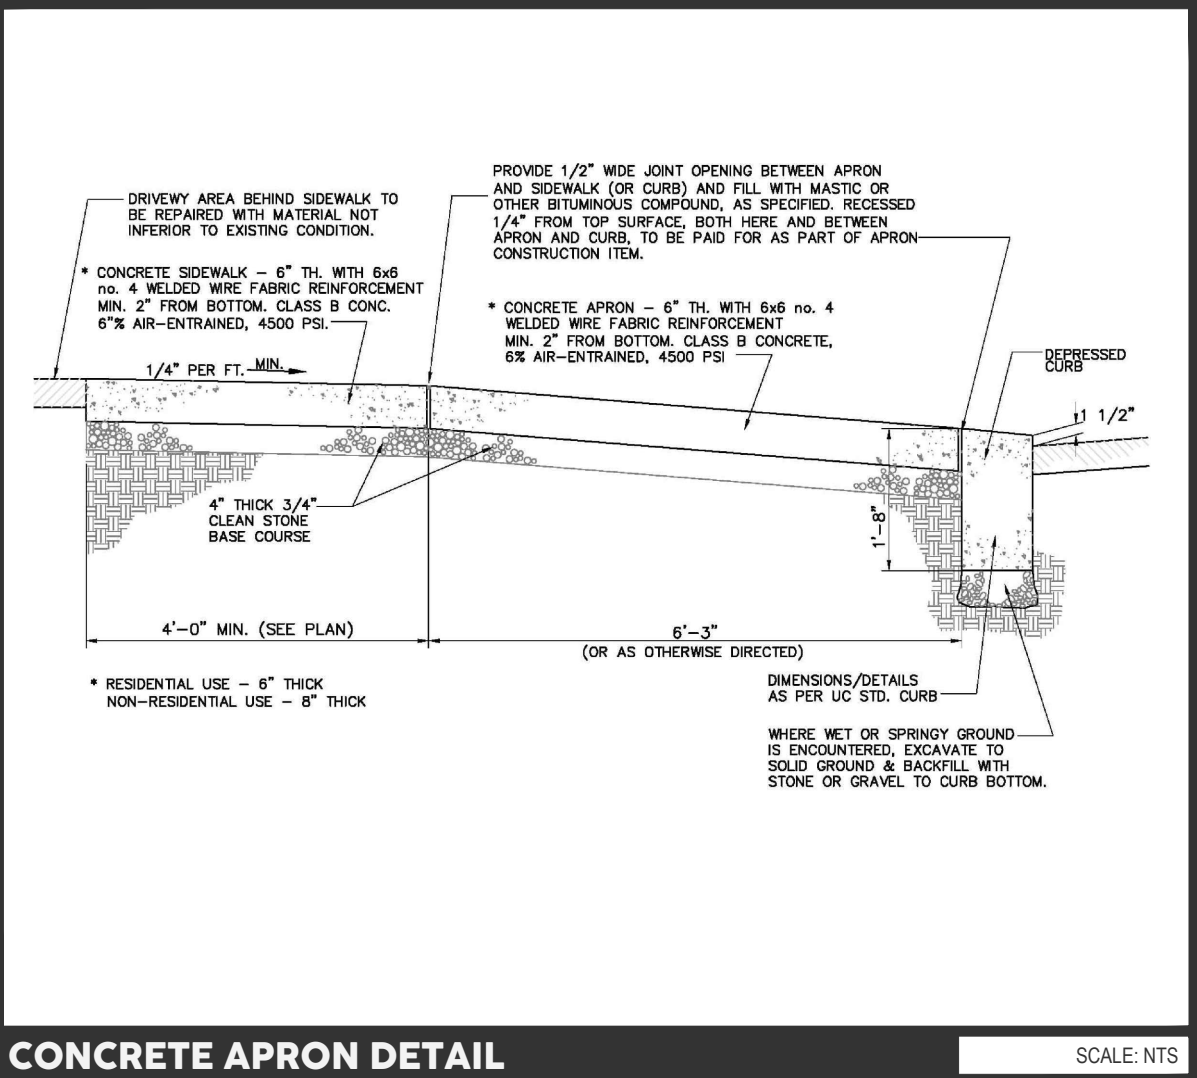


CONCRETE APRON DETAIL

SCALE: NTS

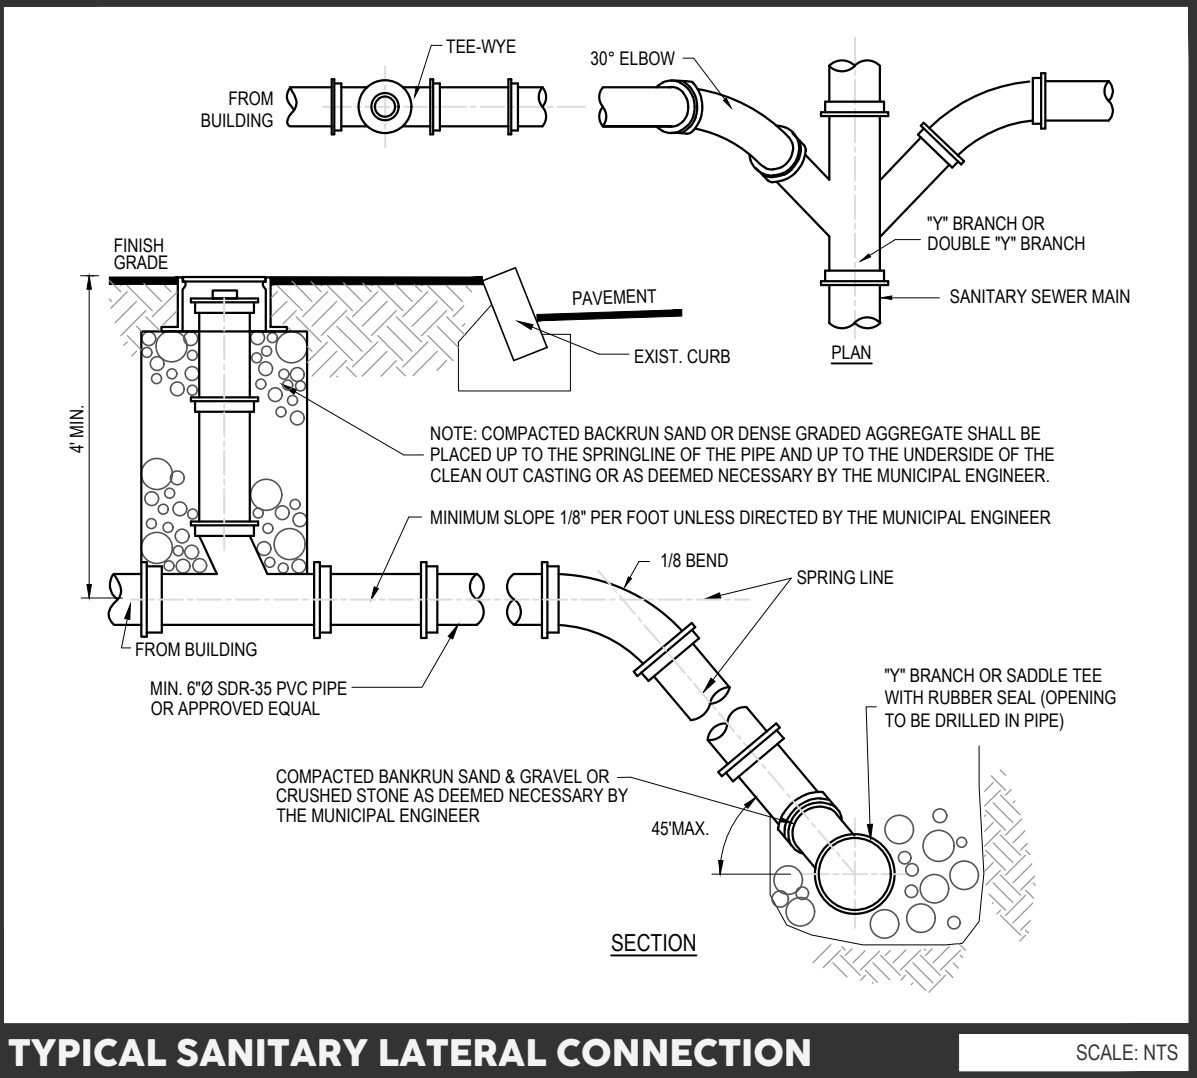


TYPICAL SANITARY LATERAL CONNECTION

SCALE: NTS

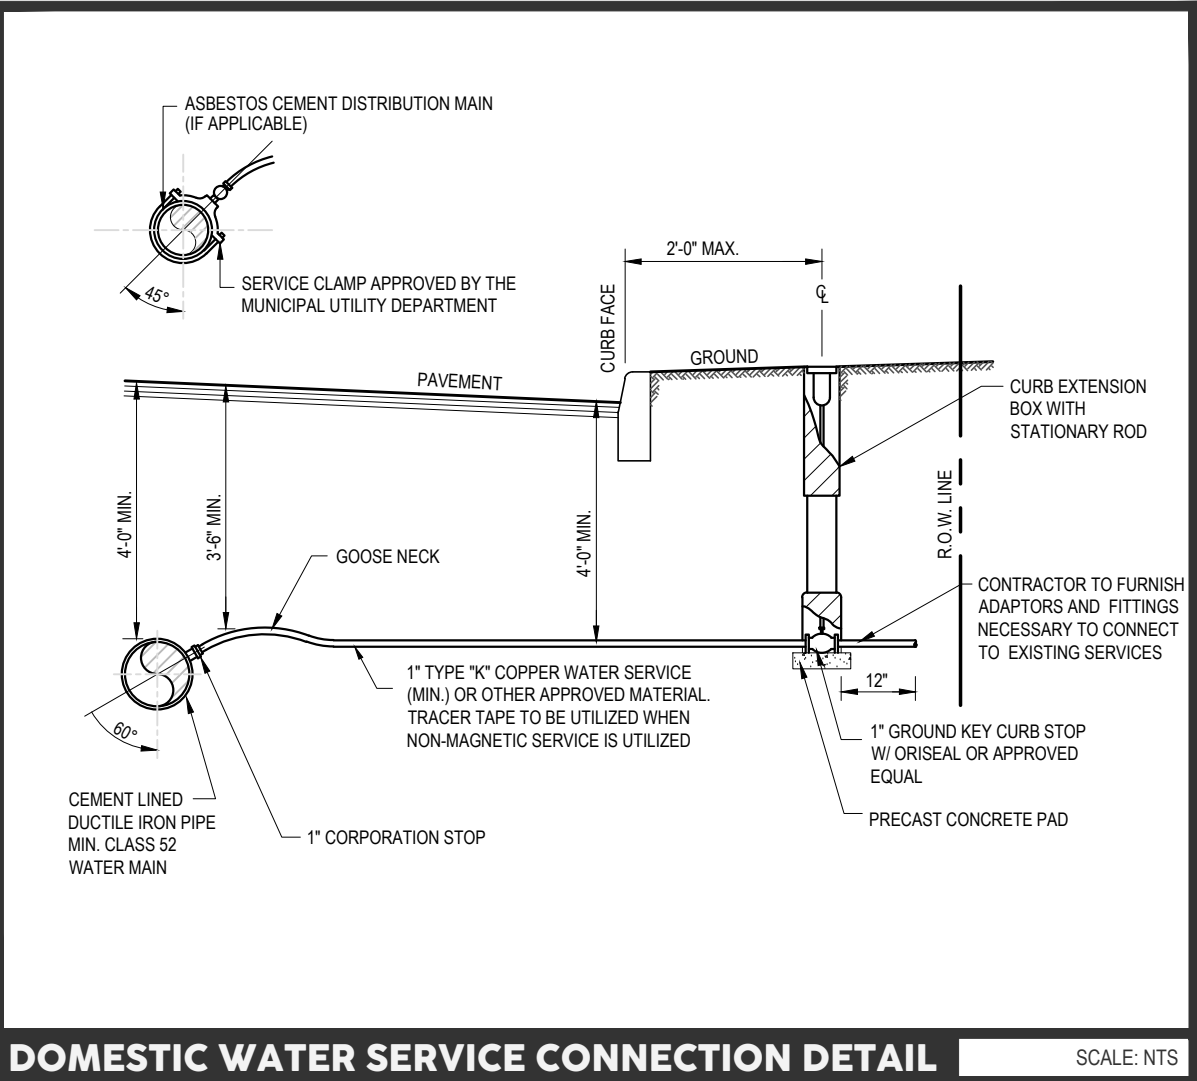


DOMESTIC WATER SERVICE CONNECTION DETAIL

SCALE: NTS

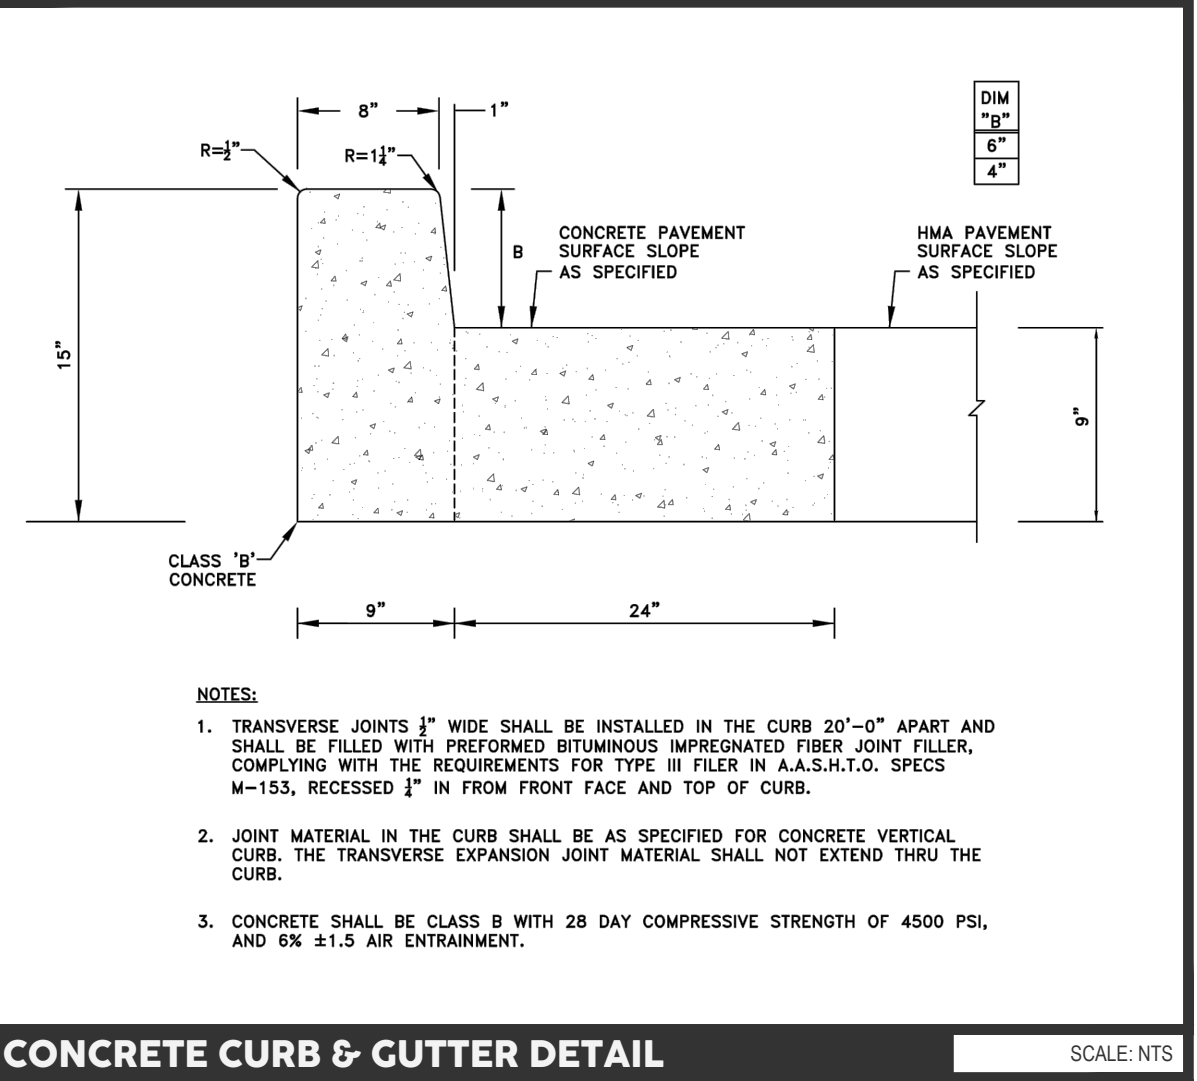


CONCRETE CURB & CUTTER DETAIL

SCALE: NTS

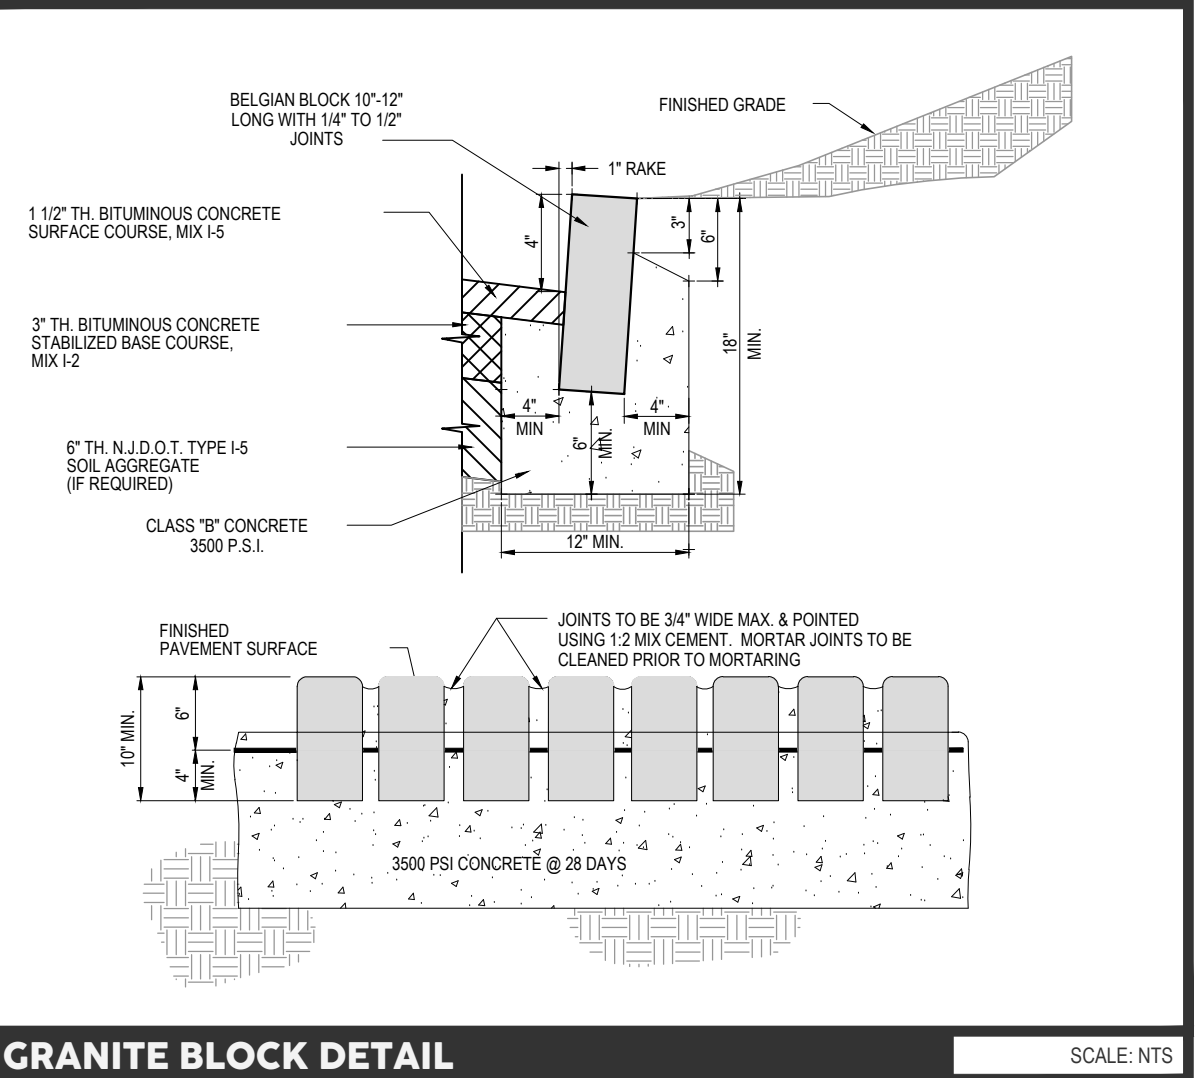


GRANITE BLOCK DETAIL

SCALE: NTS

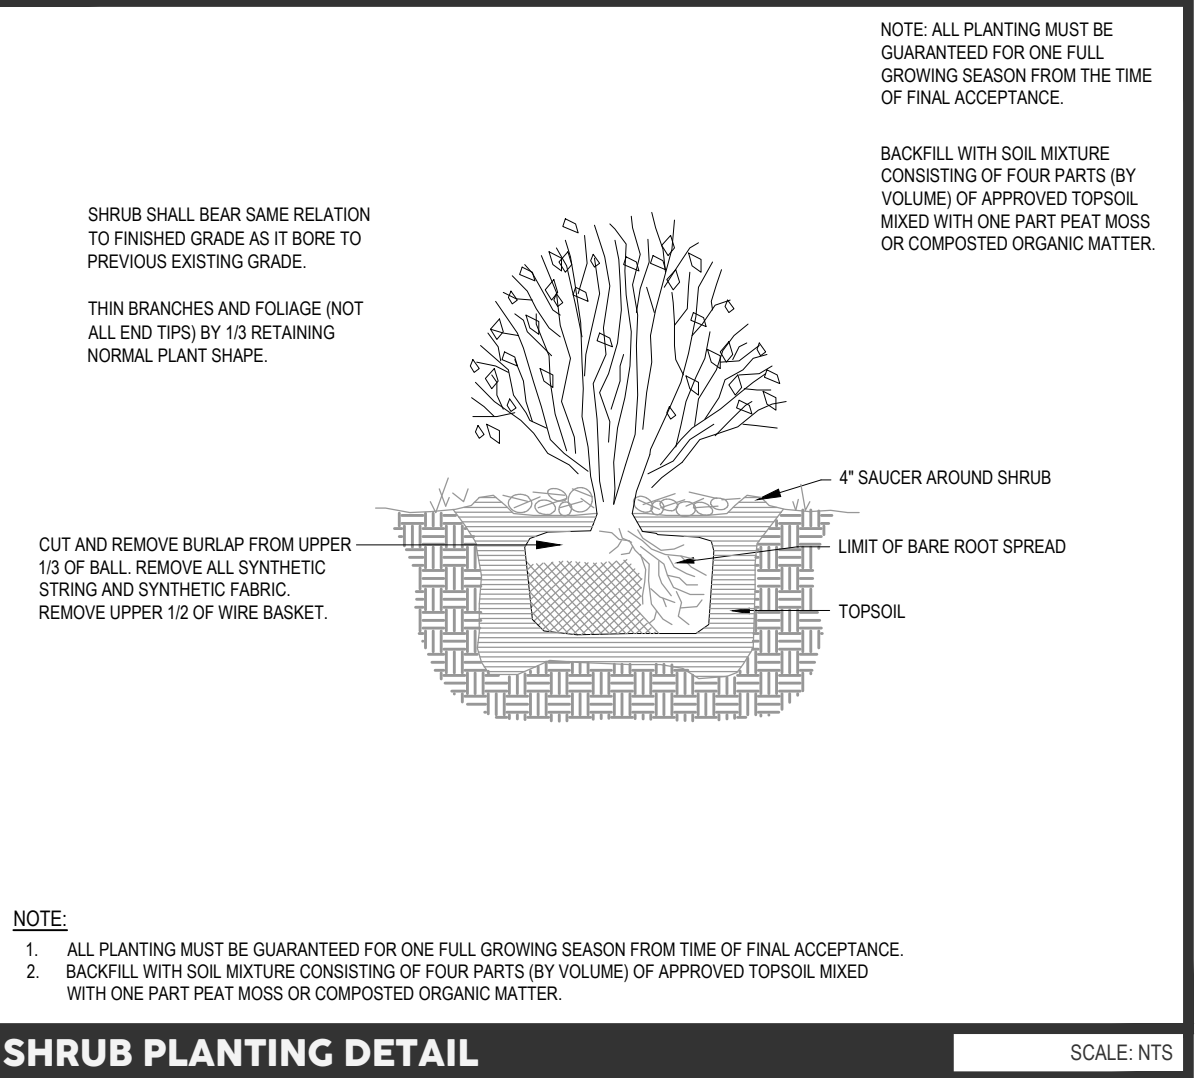

SHRUB PLANTING DETAIL


SCALE: NTS

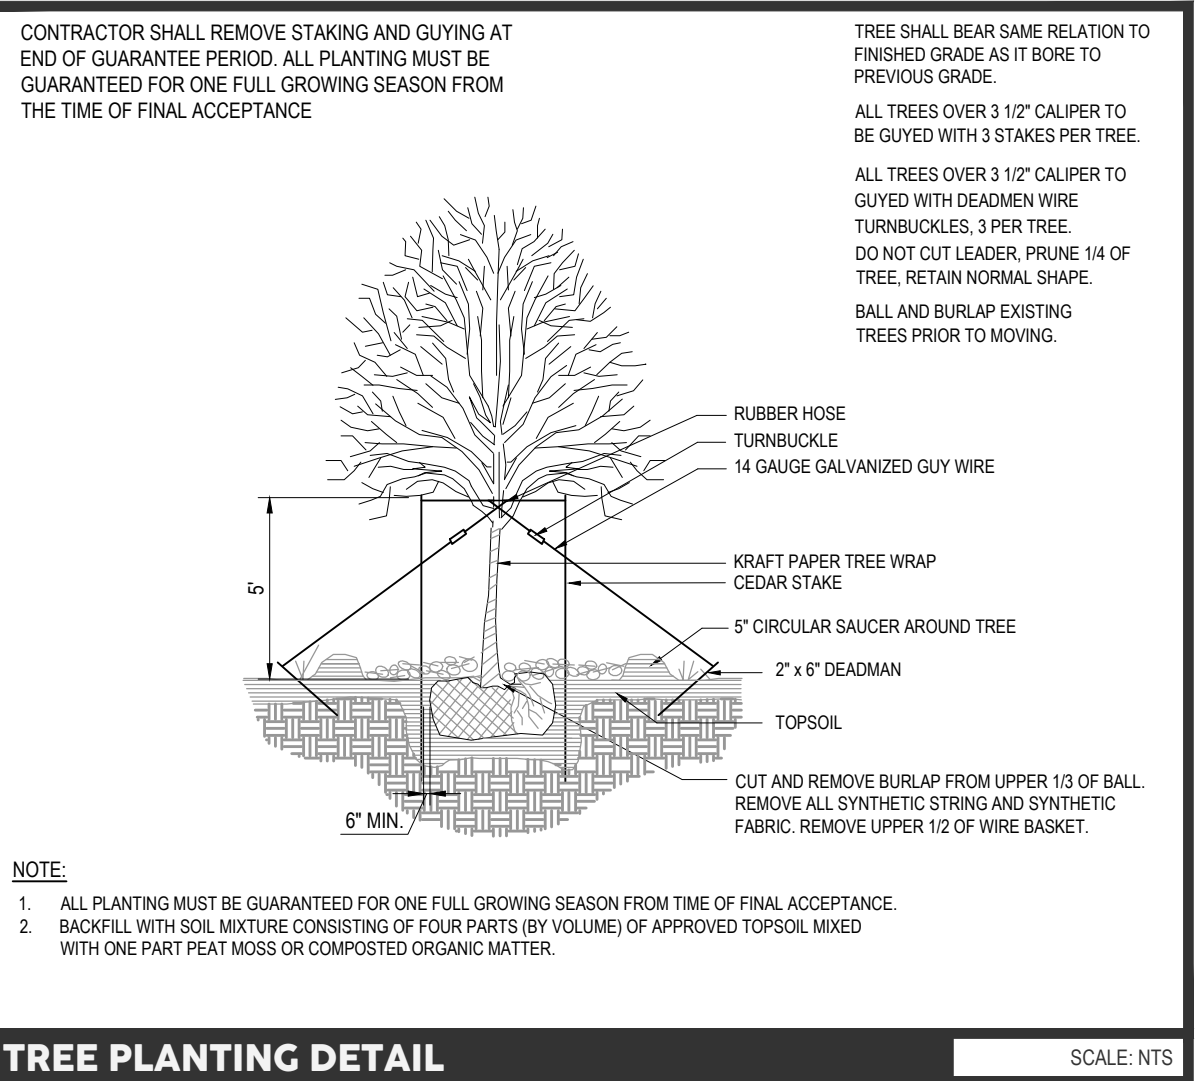

TREE PLANTING DETAIL

SCALE: NTS

revisions	01.	05.20.2022	revised per completeness letter
	02.	07.19.2022	general revisions
	03.	08.12.2022	general revisions

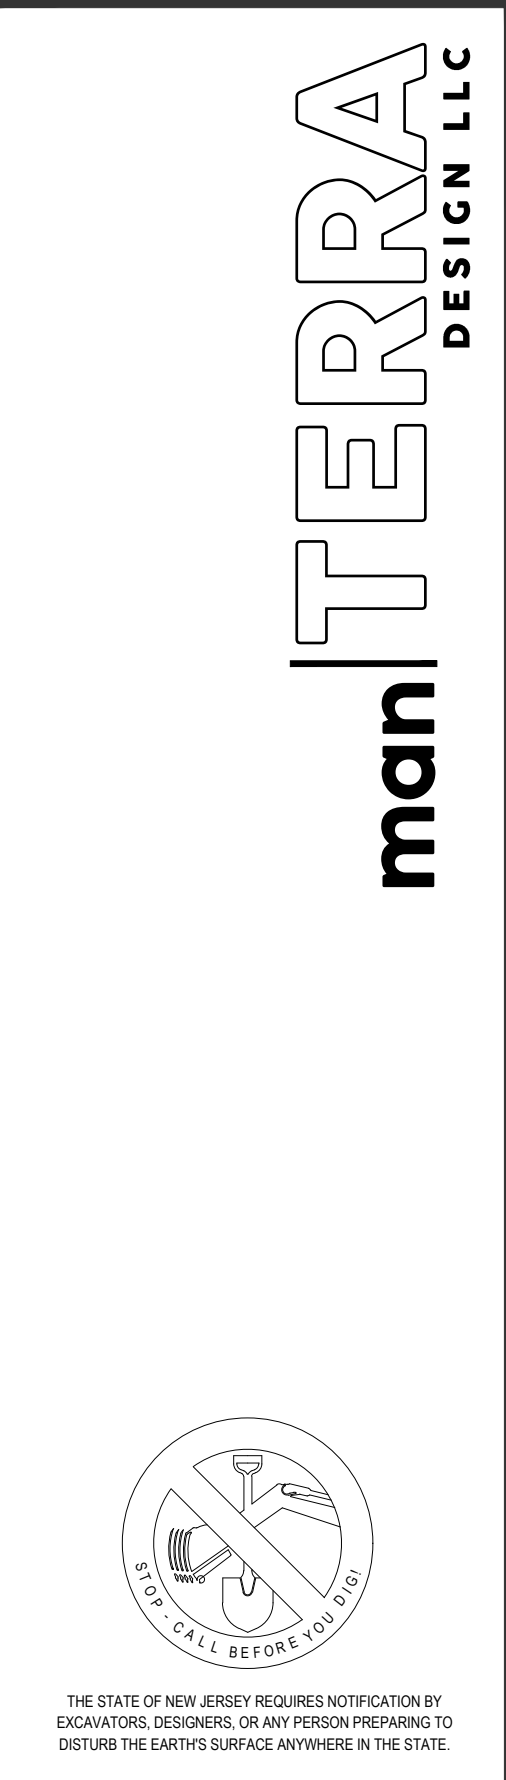

44-46
WAINWRIGHT
LLC

BLOCK 146, LOT 12
1525-1528 W 3RD STREET
CITY OF PLAINFIELD
UNION COUNTY, NEW JERSEY

CONSTRUCTION DETAILS

Giovanni Manilio

GIOVANNI MANILIO, PE
NEW JERSEY PROFESSIONAL ENGINEER 47552

drawn by **jam** date **02.01.2022**

checked by **jam** scale **as shown**

po box 275
somerville, nj 08876
908.800.5500
manterradesign.com
certificate of authorization: 24GA28327100

4